
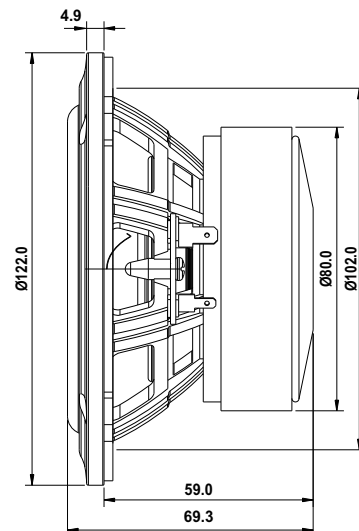


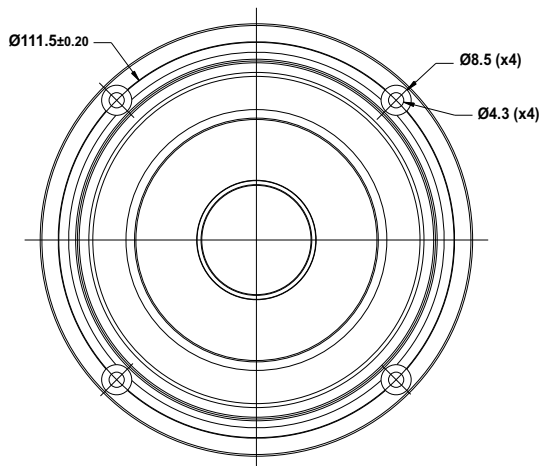

### FEATURES

- Vented reinforced plastic chassis
- Anodised aluminium cone
- Low damping rubber surround
- Large vented motor system
- Long stroke linear suspension
- Light weight CCAW voice coil
- Non-conducting fibreglass coil former
- Non-resonant long life lead wires

### Specs :

|                           |                    |                            |            |
|---------------------------|--------------------|----------------------------|------------|
| Nominal Impedance         | 4 $\Omega$         | Free air resonance, Fs     | 52.5 Hz    |
| DC resistance, Re         | 3.1 $\Omega$       | Sensitivity (2.83 V / 1 m) | 87 dB      |
| Voice coil inductance, Le | 0.25 mH            | Mechanical Q-factor, Qms   | 5.0        |
| Effective piston area, Sd | 50 cm <sup>2</sup> | Electrical Q-factor, Qes   | 0.33       |
| Voice coil diameter       | 25.4 mm            | Total Q-factor, Qts        | 0.31       |
| Voice coil height         | 15 mm              | Moving mass incl.air, Mms  | 6.1 g      |
| Air gap height            | 5 mm               | Force factor, Bl           | 4.35 Tm    |
| Linear coil travel (p-p)  | 10 mm              | Equivalent volume, Vas     | 5.3 liters |
| Magnetic flux density     | 1.03 T             | Compliance, Cms            | 1.50 mm/N  |
| Magnet weight             | 0.40 kg            | Mechanical loss, Rms       | 0.4 kg/s   |
| Net weight                | 0.86 kg            | Rated power handling*      | 30 W       |

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

