
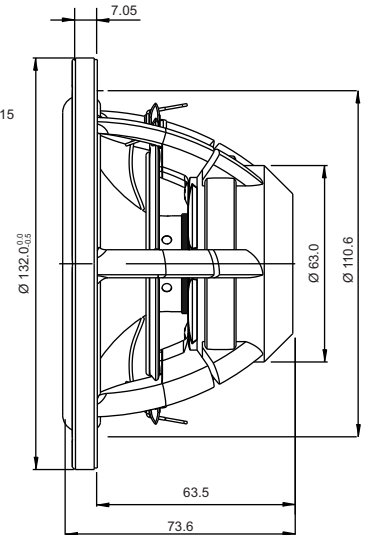


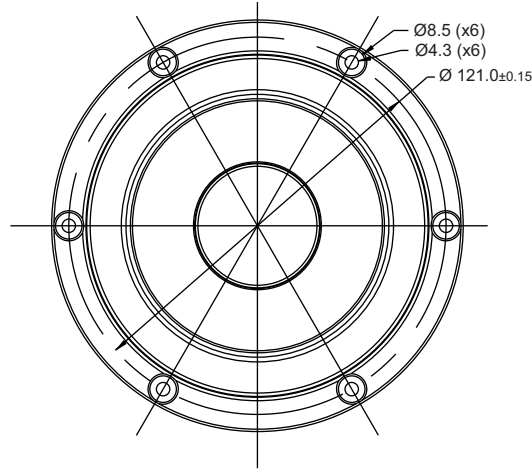


### FEATURES

- Vented aerodynamic cast aluminium chassis for optimum strength and low compression.
- Proprietary cone material with EGYPTIAN PAPYRUS™ fibres made in-house.
- Soft low damping rubber surround for optimum transient response.
- Advanced BIMAX spider for improved linearity.
- Powerful optimized low distortion neodymium motor system.
- Non-conducting fibre glass voice coil former for minimum damping.
- Extended copper sleeve on pole piece for low inductance and reduced distortion.
- CCAW voice coil for reduced moving mass.
- Long life silver lead wires attached 180° apart for improved stability.
- Vented pole piece and coil former for reduced compression.
- Low piston to chassis diameter ratio.
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet.

### Specs :

|                           |                    |                            |             |
|---------------------------|--------------------|----------------------------|-------------|
| Nominal Impedance         | 8 Ω                | Free air resonance, Fs     | 41.5 Hz     |
| DC resistance, Re         | 6.0 Ω              | Sensitivity (2.83 V / 1 m) | 87 dB       |
| Voice coil inductance, Le | 0.15 mH            | Mechanical Q-factor, Qms   | 3.55        |
| Effective piston area, Sd | 70 cm <sup>2</sup> | Electrical Q-factor, Qes   | 0.33        |
| Voice coil diameter       | 30.5 mm            | Total Q-factor, Qts        | 0.30        |
| Voice coil height         | 15 mm              | Moving mass incl.air, Mms  | 6.8 g       |
| Air gap height            | 5 mm               | Force factor, Bl           | 5.7 Tm      |
| Linear coil travel (p-p)  | 10 mm              | Equivalent volume, Vas     | 15.0 liters |
| Magnetic flux density     | 1.08 T             | Compliance, Cms            | 2.16 mm/N   |
| Magnet weight             | 0.1 kg             | Mechanical loss, Rms       | 0.5 kg/s    |
| Net weight                | 0.78 kg            | Rated power handling*      | 40 W        |

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

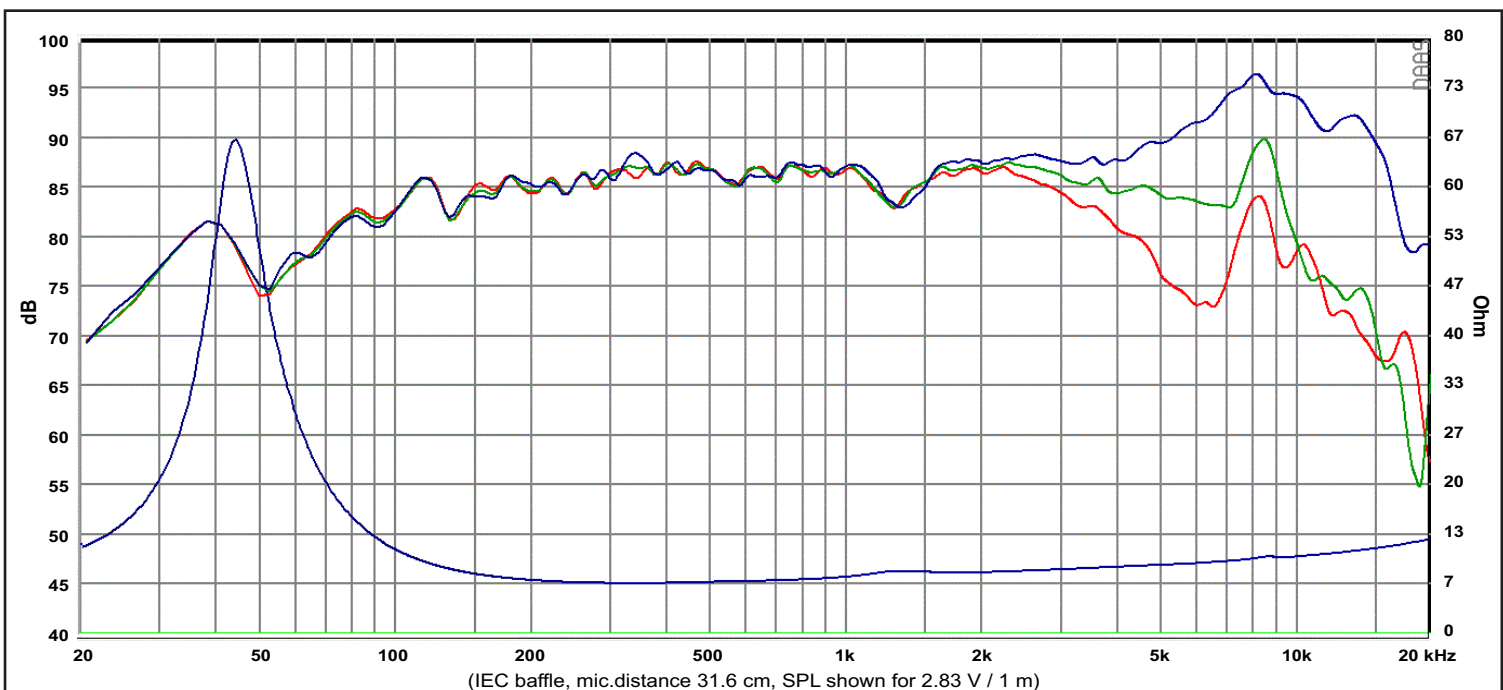

Response Curve :

— (Blue) : on axis      — ( Green ) : 30° off-axis      — (Red) : 60° off-axis

REV. 4 (24.03.2016)