
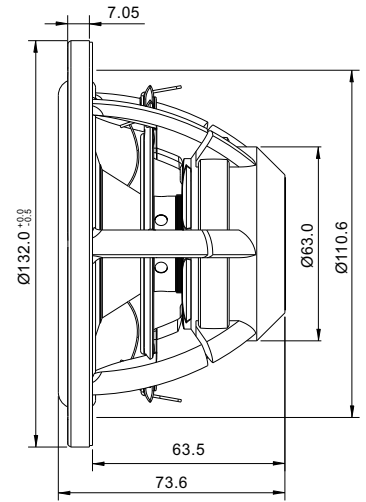


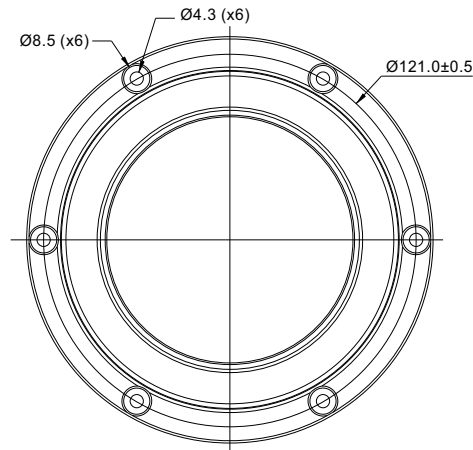


### Specs :

#### FEATURES

- Advanced TeXtreme® cone
- Vented aerodynamic cast aluminium chassis
- Soft low damping rubber surround
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece
- Non-conducting fiberglass voice coil former
- Vented pole piece and voice coil
- Light weight CCAW voice coil
- Long life silver lead wires

|                           |                    |                            |             |
|---------------------------|--------------------|----------------------------|-------------|
| Nominal Impedance         | 8 $\Omega$         | Free air resonance, Fs     | 40 Hz       |
| DC resistance, Re         | 6.0 $\Omega$       | Sensitivity (2.83V/1m)     | 87 dB       |
| Voice coil inductance, Le | 0.18 mH            | Mechanical Q-factor, Qms   | 4.99        |
| Effective piston area, Sd | 70 cm <sup>2</sup> | Electrical Q-factor, Qes   | 0.34        |
| Voice coil diameter       | 30.5 mm            | Total Q-factor, Qts        | 0.32        |
| Voice coil height         | 15 mm              | Moving mass incl. air, Mms | 7.3 g       |
| Air gap height            | 5 mm               | Force factor, Bl           | 5.7 Tm      |
| Linear coil travel (p-p)  | 10 mm              | Equivalent volume, Vas     | 14.8 liters |
| Magnetic flux density     | 1.08 T             | Compliance, Cms            | 2.19 mm/N   |
| Magnet weight             | 0.1 kg             | Mechanical loss, Rms       | 0.4 kg/s    |
| Net weight                | 0.79 kg            | Rated power handling*      | 40 W        |

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

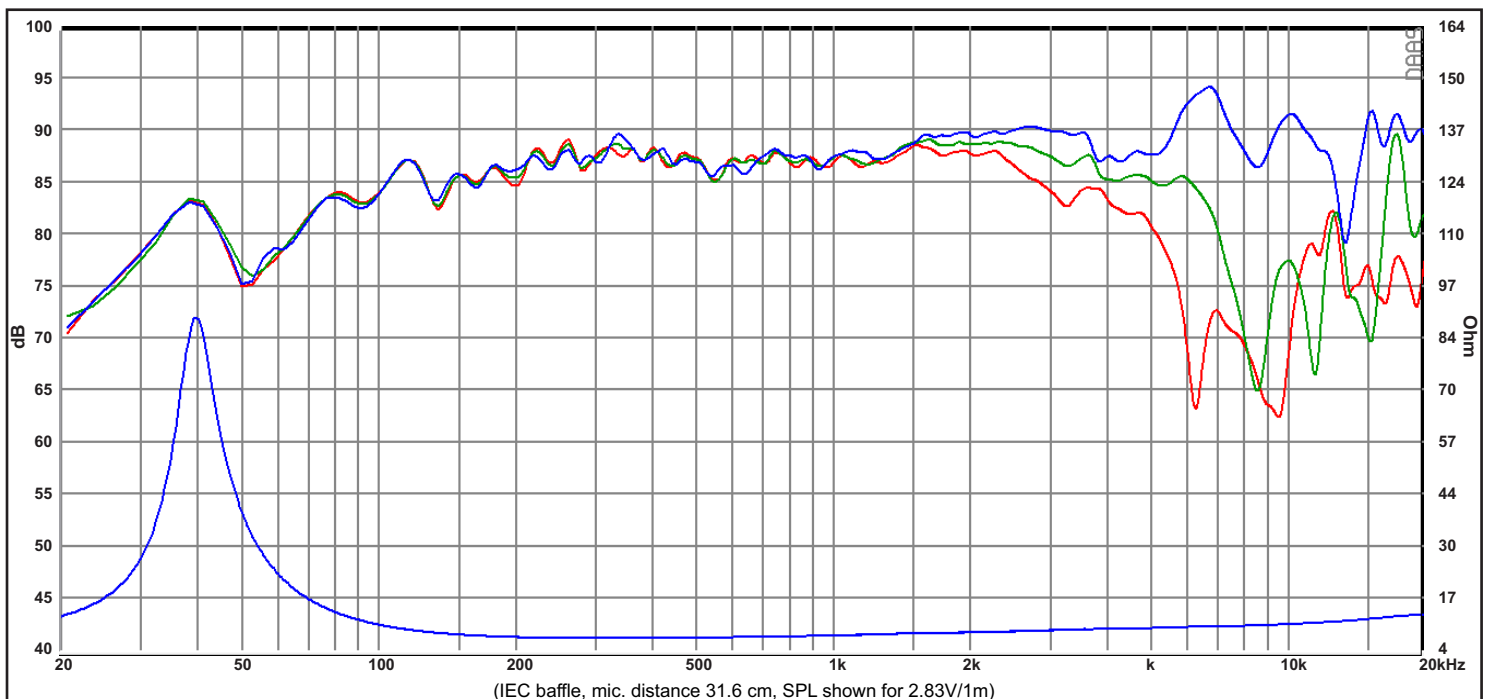

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis

REV. 1 (19.03.2025)