

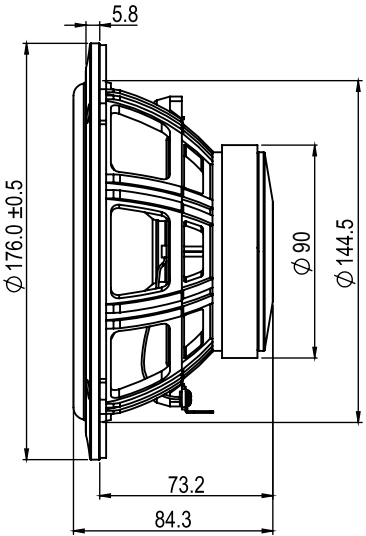


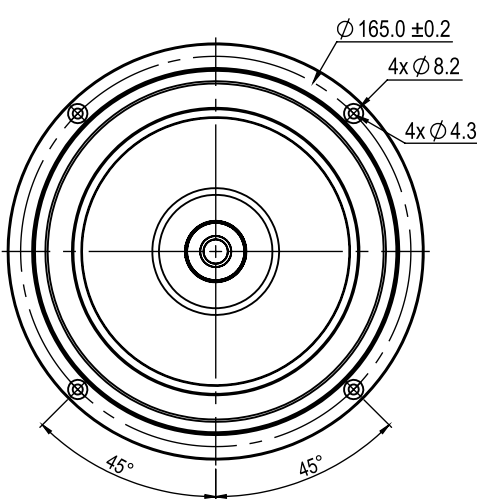

Specs:

FEATURES • Proprietary cone material with natural fibers made in-house • Light weight foam surround • Optimized whizzer cone for smooth high frequency extension • Phase plug for controlled radiation • Vented spider with flexibility control • Optimized motor system • Vented reinforced plastic chassis • Non-conductive coil former • Long life lead wires • Extended copper sleeve on pole piece	Nominal Impedance	7 Ω	Free air resonance, Fs	44 Hz
	DC resistance, Re	5.2 Ω	Sensitivity (2.83 V / 1 m)	91 dB
	Voice coil inductance, Le	0.22 mH	Mechanical Q-factor, Qms	9.0
	Effective piston area, Sd	128 cm²	Electrical Q-factor, Qes	0.48
	Voice coil diameter	25.4 mm	Total Q-factor, Qts	0.46
	Voice coil height	10.1 mm	Moving mass incl.air, Mms	9.8 g
	Air gap height	4 mm	Force factor, Bl	5.4 Tm
	Linear coil travel (p-p)	6.1 mm	Equivalent volume, Vas	31 liters
	Magnetic flux density	1.05 T	Compliance, Cms	1.33 mm/N
	Magnet weight	0.29 kg	Mechanical loss, Rms	0.3 kg/s
	Net weight	0.98 kg	Rated power handling*	30 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

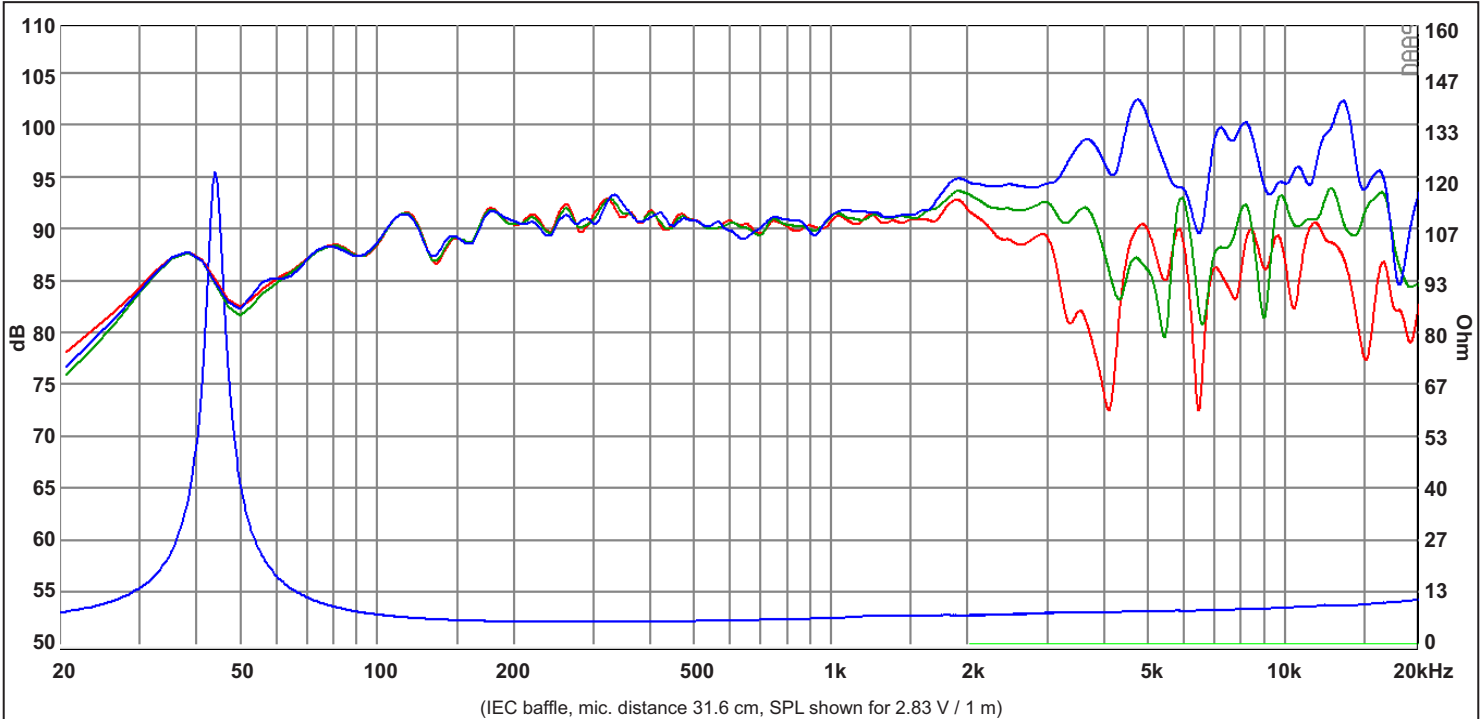

Response Curve :
— (Blue) : on axis — (Green) : 30° off-axis — (Red) : 60° off-axis