
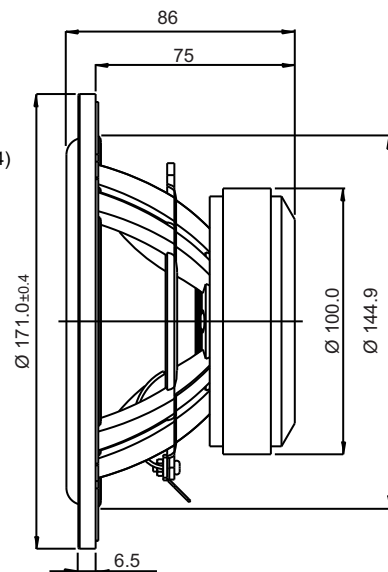


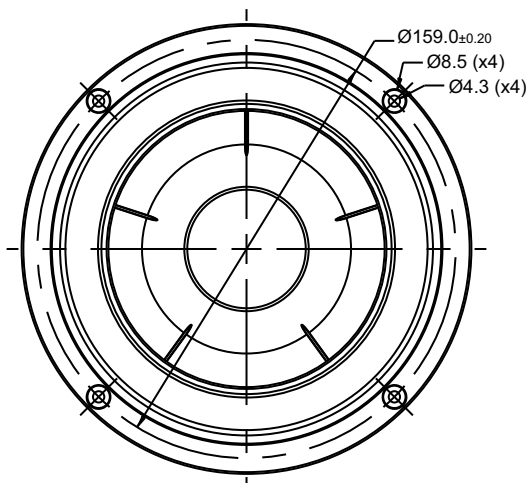

FEATURES

- Vented cast aluminum chassis for optimum strength and low compression
- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up.
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and low distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires
- Vented pole piece for reduced compression

Specs :

Nominal Impedance	4 Ω	Free air resonance, F_s	32 Hz
DC resistance, R_e	3.1 Ω	Sensitivity (2.83 V / 1 m)	90 dB
Voice coil inductance, L_e	0.13 mH	Mechanical Q-factor, Q_{ms}	5.95
Effective piston area, S_d	118 cm ²	Electrical Q-factor, Q_{es}	0.34
Voice coil diameter	35.5 mm	Total Q-factor, Q_{ts}	0.32
Voice coil height	16 mm	Moving mass incl.air, M_{ms}	14.8 g
Air gap height	5 mm	Force factor, Bl	5.2 Tm
Linear coil travel (p-p)	11 mm	Equivalent volume, V_{as}	33 liters
Magnetic flux density	1.0 T	Compliance, C_{ms}	1.67 mm/N
Magnet weight	0.54 kg	Mechanical loss, R_{ms}	0.5 kg/s
Net weight	1.56 kg	Rated power handling*	60 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

Box recommendations :

Sealed box : 11-20 liter

Vented box : 17 liter tuned to 35 Hz

Conditions:

0.4 ohm additional series resistance
 $Q_a = 30$ (sealed box only) $Q_b = 7$ (vented box only)
 Volumes given are effective acoustic volumes

