
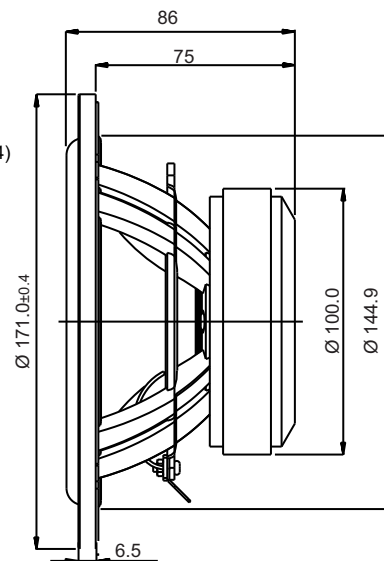


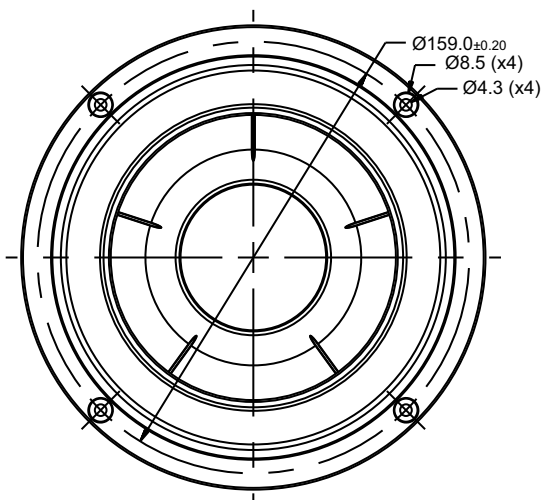


### FEATURES

- Vented cast aluminum chassis for optimum strength and low compression
- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up.
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and low distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires
- Vented pole piece for reduced compression

### Specs :

|                              |                     |                                |           |
|------------------------------|---------------------|--------------------------------|-----------|
| Nominal Impedance            | 8 $\Omega$          | Free air resonance, $F_s$      | 31.5 Hz   |
| DC resistance, $R_e$         | 5.7 $\Omega$        | Sensitivity (2.83 V / 1 m)     | 86.5 dB   |
| Voice coil inductance, $L_e$ | 0.15 mH             | Mechanical Q-factor, $Q_{ms}$  | 4.1       |
| Effective piston area, $S_d$ | 118 cm <sup>2</sup> | Electrical Q-factor, $Q_{es}$  | 0.38      |
| Voice coil diameter          | 35.5 mm             | Total Q-factor, $Q_{ts}$       | 0.35      |
| Voice coil height            | 16 mm               | Moving mass incl.air, $M_{ms}$ | 12.5 g    |
| Air gap height               | 5 mm                | Force factor, $Bl$             | 5.9 Tm    |
| Linear coil travel (p-p)     | 11 mm               | Equivalent volume, $V_{as}$    | 45 liters |
| Magnetic flux density        | 1.0 T               | Compliance, $C_{ms}$           | 2.3 mm/N  |
| Magnet weight                | 0.54 kg             | Mechanical loss, $R_{ms}$      | 0.6 kg/s  |
| Net weight                   | 1.56 kg             | Rated power handling*          | 60 W      |

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

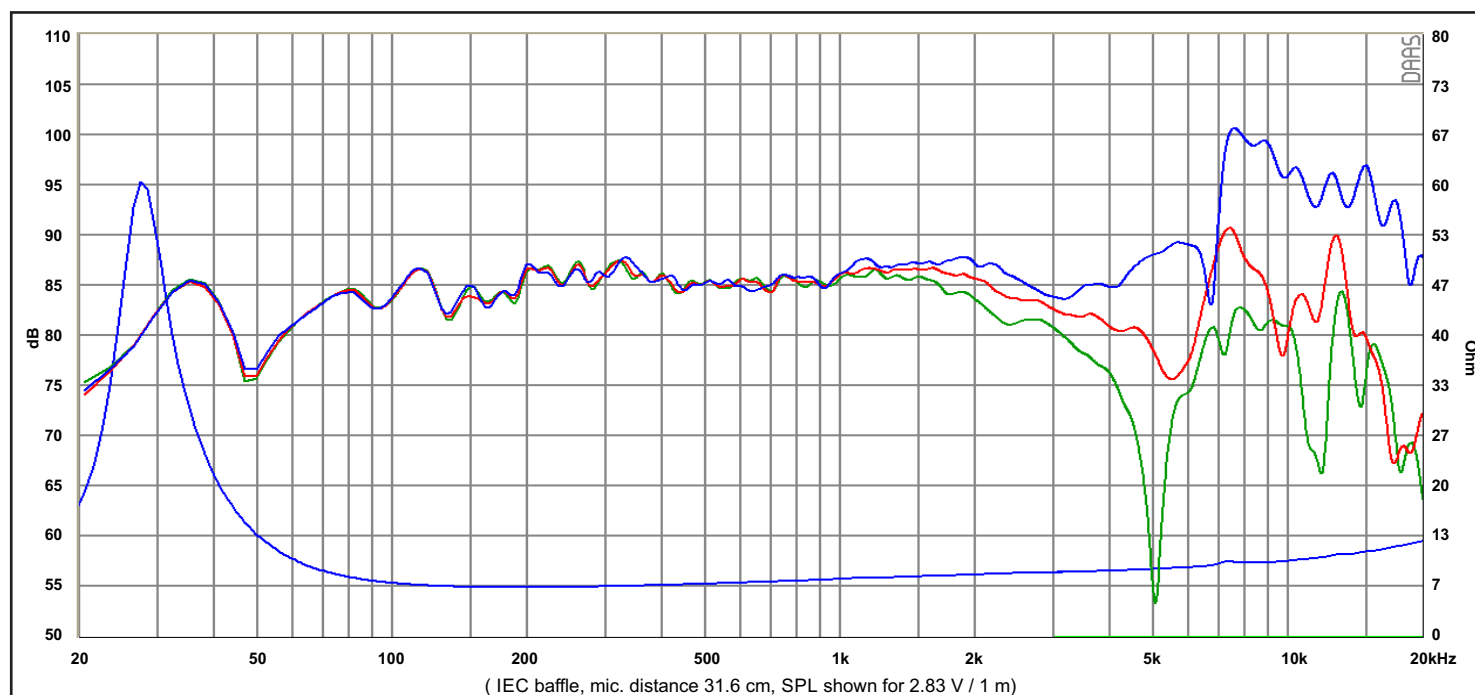

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— ( Red ) : 60° off-axis

REV.2 (20.11.2025)