
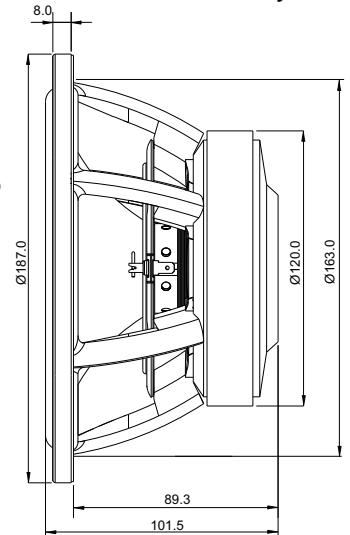


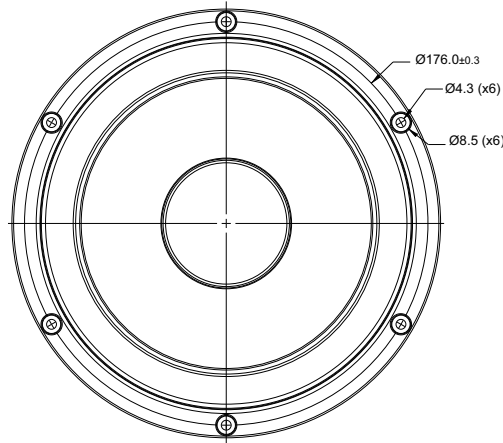


### FEATURES

- Vented aerodynamic cast aluminium chassis for optimum strength and low compression.
- Proprietary cone material with EGYPTIAN PAPYRUS™ fibres made in-house.
- Soft low damping rubber surround for optimum transient response.
- Advanced BIMAX spider for improved linearity.
- Non-conducting fibre glass voice coil former for minimum damping.
- Extended copper sleeve on pole piece for low inductance and reduced distortion.
- CCAW voice coil for reduced moving mass.
- Long life silver lead wires attached 180° apart for improved stability.
- Vented pole piece and coil former for reduced compression.
- Low piston to chassis diameter ratio.
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet.

### Specs :

|                           |                     |                            |             |
|---------------------------|---------------------|----------------------------|-------------|
| Nominal Impedance         | 4 Ω                 | Free air resonance, Fs     | 29 Hz       |
| DC resistance, Re         | 3.4 Ω               | Sensitivity (2.83 V / 1 m) | 91.5 dB     |
| Voice coil inductance, Le | 0.20 mH             | Mechanical Q-factor, Qms   | 5.2         |
| Effective piston area, Sd | 158 cm <sup>2</sup> | Electrical Q-factor, Qes   | 0.28        |
| Voice coil diameter       | 38.5 mm             | Total Q-factor, Qts        | 0.27        |
| Voice coil height         | 19 mm               | Moving mass incl.air, Mms  | 17.0 g      |
| Air gap height            | 6 mm                | Force factor, Bl           | 6.1 Tm      |
| Linear coil travel (p-p)  | 13 mm               | Equivalent volume, Vas     | 62.7 liters |
| Magnetic flux density     | 0.9 T               | Compliance, Cms            | 1.77 mm/N   |
| Magnet weight             | 0.88 kg             | Mechanical loss, Rms       | 0.6 kg/s    |
| Net weight                | 2.29 kg             | Rated power handling*      | 70 W        |

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

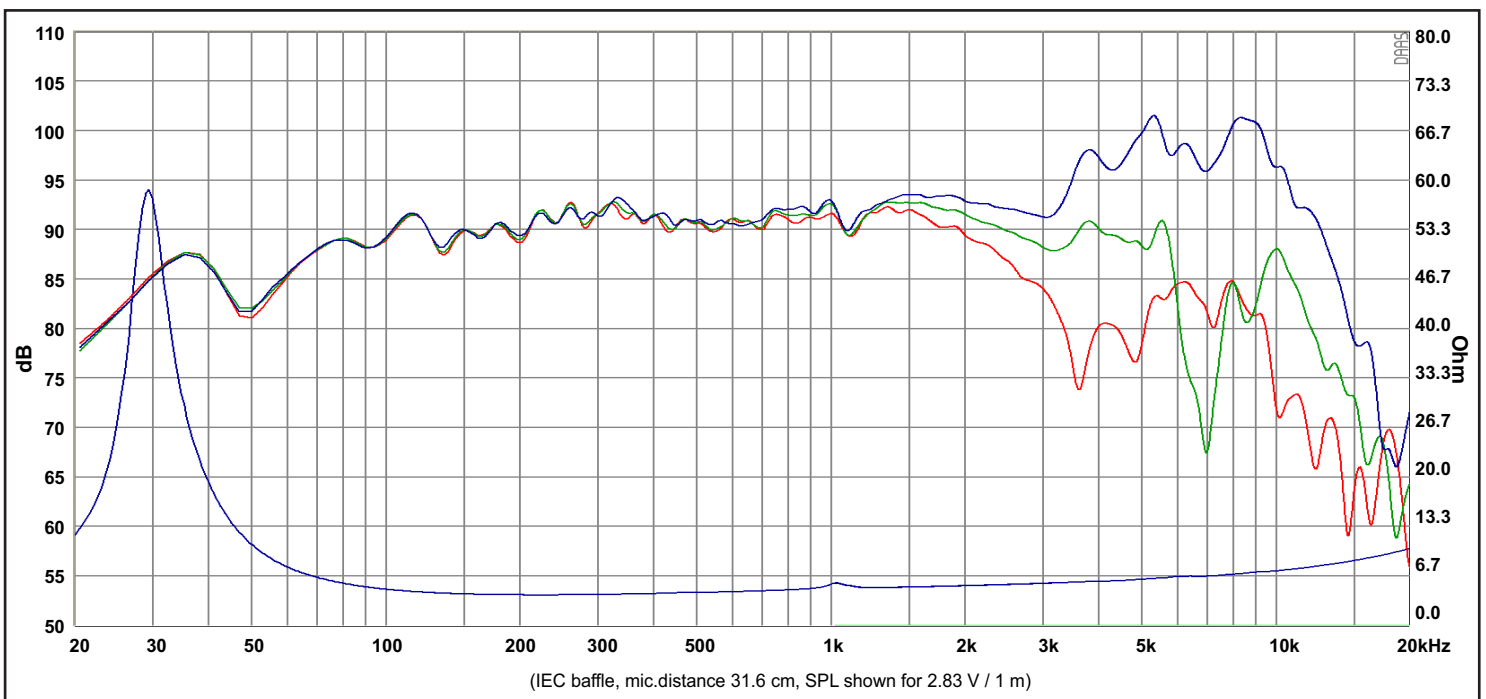

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis