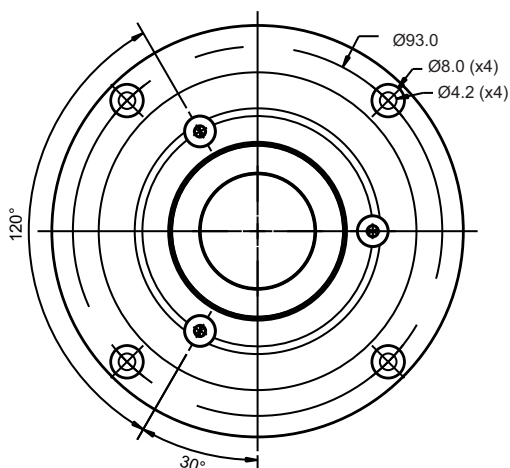



### FEATURES

- Large surround dome for increased acoustic output.
- Dual balanced compression chamber for improved dynamics.
- Copper cap for reduced voice coil inductance and minimum phase shift.
- Saturation controlled motor system for low distortion.
- Non-reflective rear chamber with optimized damping for improved dynamics.
- Flow optimized vented pole piece for optimum coupling to rear chamber.
- CCAW voice coil for low moving mass.
- Long life silver lead wires.
- Low resonance frequency.
- Cast aluminium faceplate.

### Specs :

|                                 |                     |                               |         |
|---------------------------------|---------------------|-------------------------------|---------|
| Nominal Impedance               | 4 $\Omega$          | Free air resonance, $F_s$     | 600 Hz  |
| DC resistance, $R_e$            | 3.0 $\Omega$        | Sensitivity (2.83 V / 1 m)    | 93 dB   |
| Voice coil inductance, $L_e$    | 0.05 mH             | Mechanical Q-factor, $Q_{ms}$ | 2.94    |
| Effective piston area, $S_d$    | 9.6 cm <sup>2</sup> | Electrical Q-factor, $Q_{es}$ | 1.09    |
| Voice coil diameter             | 29 mm               | Total Q-factor, $Q_{ts}$      | 0.8     |
| Voice coil height               | 2.0 mm              | Force factor, $Bl$            | 2.4 Tm  |
| Air gap height                  | 2.5 mm              | Rated power handling*         | 60 W    |
| Linear coil travel (p-p)        | 0.5 mm              | Magnetic flux density         | 1.1 T   |
| Moving mass incl. air, $M_{ms}$ | 0.45 g              | Magnet weight                 | 0.22 kg |
|                                 |                     | Net weight                    | 0.5 kg  |

\* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

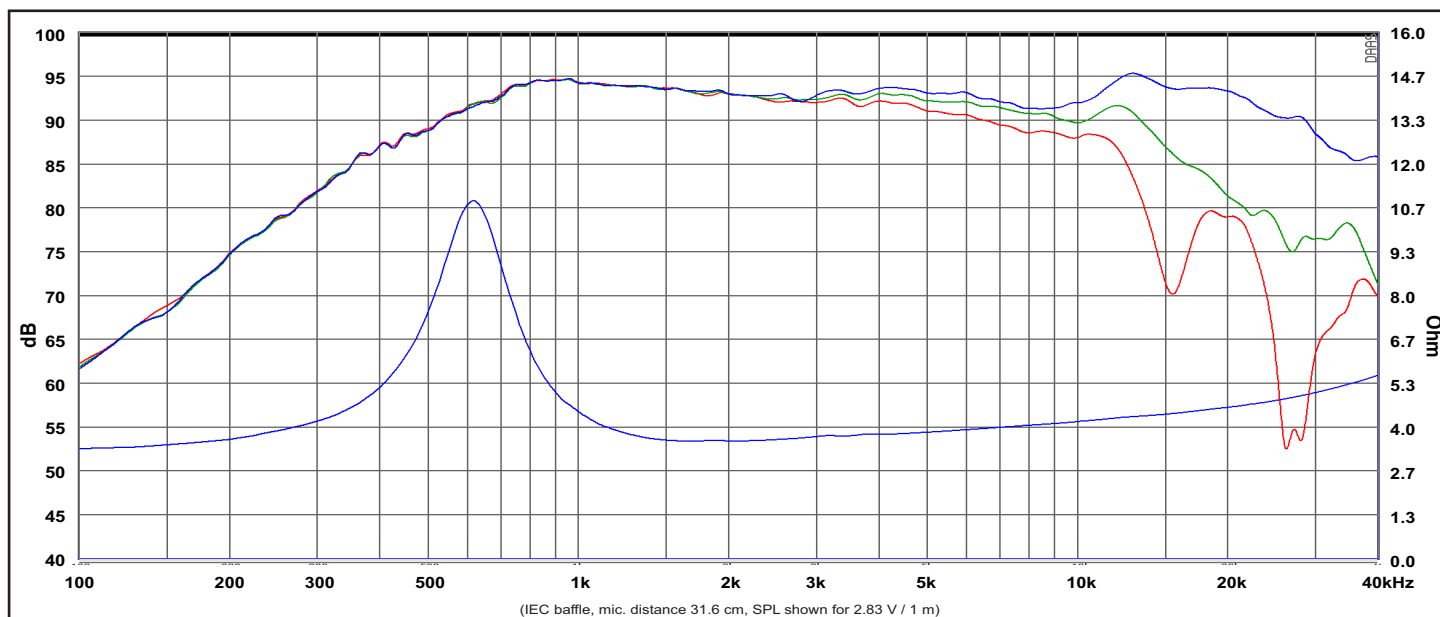

Response Curve :

— (Blue) : on axis      — ( Green ) : 30° off-axis      - - - ( Red ) : 60° off-axis

REV.0 (04.04.2016)