SB ACOUSTICS

building your sound

Catalogue

Speaker Drivers

Find us on:

- SB Acoustics
- sbacoustics
- SB Acoustics
- sbacoustics.com
- sinarbajaelectric.com

92026

SB ACOUSTICS

building your sound

Built from the foundation of a company with decades of manufacturing experience and partnered with Danish audio design engineers touted for their revolutionary designs. SB Acoustics was formed to bring an alternative to the high-end transducer market.

Marrying the design talents of Danesian Audio (Denmark), a company filled with industry veterans, responsible for many well known and revolutionary designs, and manufacturing expert Sinar Baja Electric (Indonesia), a vertically integrated company with more than 45 years of transducer manufacturing experience. We feel we have been able to create an exciting line of products, without compromising acoustic performance for cost. Ultimately, we invite you to judge.

SB ELECTRIC

Sinar Baja Electric is the manufacturing company behind SB Acoustics. Established in 1981 and extensively expanded ever since to become the largest loudspeaker manufacturer in Indonesia. With a population of more than 250 million people, Indonesia is a significant contributor to global manufacturing.

To this day, Sinar Baja Electric is a privately held group of companies in Surabaya, Indonesia. We develop and manufacture our own range of brands that are offered world wide through our distribution supply chain in major markets such as Europe, Australia, Asia and the United States.

We are proud to be the preferred OEM/ODM supplier of many prestigious brands from Lifestyle Hi-Fi, High-End, Automotive to Professional Audio, and much more.

With more than 45 years of history in loudspeaker manufacturing and innovation, we continues to expand in both quality, capacity, as well as services. With in-house Research & Development through the latest technologies as well as extensive experience in quality control and mass production we are confident we can deliver what you are searching for.

TWEETERS

DOME

SB14ST-C000-4 7
SB19ST-C000-4 7
SB21SDC-C000-4 7
SB21SDCN-C000-4 7
SB26ADC-C000-4 8
SB26CDC-C000-4 8
SB26STAC-C000-4 8
SB26ST-C000-5 8
SB26STCN-C000-4 9
SB26STWGC-4 9
SB29BNC-C000-4 9
SB29BAC-C000-4 9
SB29SDAC-C000-4 10
SB29SDNC-C000-4 10

RING RADIATORS

SB21RDC-C000-4 10
SB21RDCN-C000-4 10
SB29RDNC-C000-4 11
SB29RDAC-C000-4 11

SATORI

SATORI AT60NC-4 11
SATORI WG29-187 11
SATORI TW29TXNWG-4 12
SATORI TW29BNWG-4 12
SATORI TW29BNWG-8 12
SATORI TW29TXN-B 12
SATORI TW29TXN-B-8 13
SATORI TW29B 13
SATORI TW29B-B 13
SATORI TW29BN 13
SATORI TW29BN-8 14
SATORI TW29BN-B 14
SATORI TW29BN-B-8 14
SATORI TW29D 14
SATORI TW29D-B 15
SATORI TW29DN 15
SATORI TW29DN-8 15
SATORI TW29DN-B 15
SATORI TW29DN-B-8 16
SATORI TW29R 16
SATORI TW29R-B 16
SATORI TW29RN 16
SATORI TW29RN-8 17
SATORI TW29RN-B 17
SATORI TW29RN-B-8 17

FILLER DRIVER

2.5" SATORI MD60N-6 17

WIDEBANDERS

1" SB36WBAC21-4 18
1" SB36WBAC21-8 18
2.5" SB65WBAC25-4 18
3" SB10PGC21-4 18

MIDRANGES

NRX

4" SB12MNRX2-25-4 19

SATORI

5" SATORI MR13TX-4 19
5" SATORI MR13P-4 19
5" SATORI MR13P-8 19
5" SATORI MR13PNW-4 20
5" SATORI MR13PNW-8 20
6.5" SATORI MR16TX-8 20
6.5" SATORI MR16P-4 20
6.5" SATORI MR16P-8 21
6.5" SATORI MR16PNW-4 21
6.5" SATORI MR16PNW-8 21

MIDWOOFERS

CAC

4" SB12CACS25-4 21
4" SB12CACS25-8 22
5" SB15CAC30-4 22
5" SB15CAC30-8 22
6" SB17CAC35-4 22
6" SB17CAC35-8 23

CRC

5" SB15CRC30-4 23
5" SB15CRC30-8 23
6" SB17CRC35-4 23
6" SB17CRC35-8 24

MFC

5" SB15MFC30-4 24
5" SB15MFC30-8 24
6" SB17MFC35-4 24
6" SB17MFC35-8 25

NAC

5" SB15NBAC30-4 25
5" SB15NBAC30-8 25
6" SB17NBAC35-4 25
6" SB17NBAC35-8 26

NRX

4" SB12NRX25-4 26
4" SB12NRX25-8 26
5" SB15NRX2C30-4 26
5" SB15NRX2C30-8 27
6" SB17NRX2L35-4 27
6" SB17NRX2L35-8 27
6" SB17NRX2C35-4 27
6" SB17NRX2C35-8 28

PAC

4" SB12PACR25-4 28
4" SB12PAC25-4 28

PFC

4" SB12PFCR25-4 28
4" SB12PFCR25-8 29
5" SB13PFCR25-4 29
5" SB13PFCR25-8 29

MIDWOOFERS

PFC

6" SB16PFCR25-4 29
6" SB16PFCR25-8 30

SATORI

5" SATORI MW13TX-4 30
5" SATORI MW13TX-8 30
5" SATORI MW13P-4 30
5" SATORI MW13P-8 31
5" SATORI MW13PNW-4 31
5" SATORI MW13PNW-8 31
6.5" SATORI MW16TX-4 31
6.5" SATORI MW16TX-8 32
6.5" SATORI MW16P-4 32
6.5" SATORI MW16P-8 32
6.5" SATORI MW16P-12 32
6.5" SATORI MW16PNW-4 33
6.5" SATORI MW16PNW-8 33
7.5" SATORI MW19TX-4 33
7.5" SATORI MW19TX-8 33
7.5" SATORI MW19P-4 34
7.5" SATORI MW19P-8 34
7.5" SATORI MW19PNW-4 34
7.5" SATORI MW19PNW-8 34

SFC

5x8" SB15SFCR39-4 35
5x8" SB15SFCR39-8 35

WOOFERS

CAC

8" SB23CACS45-4 35
8" SB23CACS45-8 35

NAC

8" SB23NBACS45-4 36
8" SB23NBACS45-8 36

SFCL

10" SB26SFCL38-4 36
10" SB26SFCL38-8 36

NRX

8" SB23NRXS45-4 37
8" SB23NRXS45-8 37
10" SB29NRX75-6 37
10" SB29NRX75-8 37
12" SB34NRX75-6 38
12" SB34NRX75-16 38
12" SB34NRXL75-8 38

PFC

8" SB20PFCS30-7 38
8" SB20PFCR30-4 39
8" SB20PFCR30-8 39

SATORI

9.5" SATORI WO24TX-4 39
9.5" SATORI WO24TX-8 39
9.5" SATORI WO24P-4 40
9.5" SATORI WO24P-8 40
13.5" SATORI WO34HC-4 40
13.5" SATORI WO34HC-8 40

FULL RANGE

6" SB16FRPC25-7 41
8" SB20FRPC30-8 41

SUBWOOFERS

8" SB23MFCL45-4 41
8" SB23MFCL45-8 41
10" SB29SWNRX-S75-6 42
12" SB34SWNRX-S75-6 42
12" SB34SWPL76-4 42
15" SB42FHCL75-6 42

SHALLOW SUBWOOFERS

10" SW26SFC38-4 43
10" SW26SFC38-8 43
10" SW26DBAC76-4 43
10" SW26DBAC76-8 43

PASSIVE RADIATORS

4" SB12PACR-00 44
4" SB12PFCR-00 44
5" SB13 PFCR-00 44
5x8" SB15SFCR-00 44
6" SB16PFCR-00 45
8" SB23MFCL-00 45
8" SB20PFCR-00 45
10" SW26DBAC-00 45
10" SB29NRX2-00 46
10" SB29NRX-00 46
12" SB34NRX2-00 46
12" SB34NRX-00 46
DW50 47

COAXIALS

4" SB12PACR25-4-COAX 47
4" SB12PFCR25-4-COAX 47
5" SB13PFCR25-4-COAX 47
5" SB15BAC30-8-COAX 48
6" SB17BAC35-8-COAX 48
6" SB16PFCR25-4-COAX 48
7" SATORI MT19CP-8 48

DISTRIBUTORS

..... 49

SB14ST-C000-4

Impedance	4 Ω
Fs	1300 Hz
Sensitivity	86 dB
Qts	-
VC diam.	12.4 mm
Power	10 W
Dome Mat.	Fabric

- Very compact design
- Excellent piston diameter to OD ratio
- Large surround for smooth dispersion
- Threaded rear center hole for easy mounting
- Long insulated lead wires for versatile integration



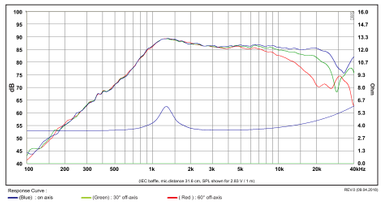

SB19ST-C000-4

Impedance	4 Ω
Fs	980 Hz
Sensitivity	88.5 dB
Qts	1.22
VC diam.	19.1 mm
Power	30 W
Dome Mat.	Fabric

- Optimized damping in pole cavity to eliminate internal reflection
- Fine weave soft fabric dome for smooth frequency response
- Saturation controlled motor system for reduced distortion
- CCAW voice coil for low moving mass
- Long life silver lead wires



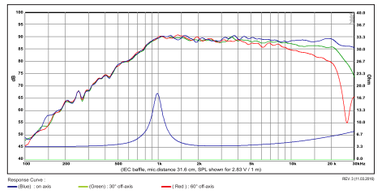

SB21SDC-C000-4

Impedance	4 Ω
Fs	720 Hz
Sensitivity	91 dB
Qts	0.95
VC diam.	20.4 mm
Power	40 W
Dome Mat.	Fabric

- Large surround dome for increased acoustics output
- Dual balanced compression chamber for improved dynamics
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- CCAW voice coil for low moving mass



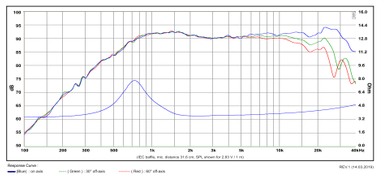

SB21SDCN-C000-4

Impedance	4 Ω
Fs	850 Hz
Sensitivity	90 dB
Qts	1.22
VC diam.	20.4 mm
Power	40 W
Dome Mat.	Fabric

- Large surround dome for increased acoustics output
- Copper cap for reduced voice coil inductance and minimum phase shift
- Compact low distortion neodymium motor system
- Non-resonant rear chamber with optimized damping for improved dynamics
- CCAW voice coil for low moving mass



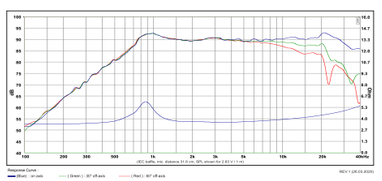

SB26ADC-C000-4

Impedance	4 Ω
Fs	680 Hz
Sensitivity	90 dB
Qts	1.11
VC diam.	25.4 mm
Power	120 W
Dome Mat.	Aluminum

- Phase optimized diaphragm design for coherent high frequency radiation
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- Non-reflective rear chamber with optimized damping for improved dynamics



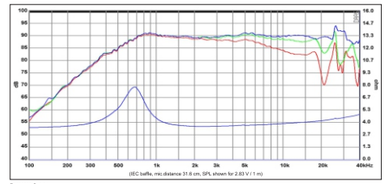

SB26CDC-C000-4

Impedance	4 Ω
Fs	690 Hz
Sensitivity	89 dB
Qts	1.12
VC diam.	25.4 mm
Power	100 W
Dome Mat.	Ceramic

- Ceramic dome
- Phase optimized diaphragm design for coherent high frequency radiation
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- CCAW voice coil for low moving mass



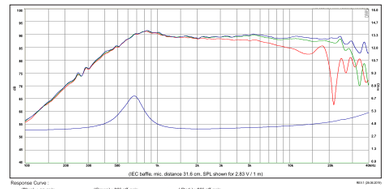

SB26STAC-C000-4

Impedance	4 Ω
Fs	750 Hz
Sensitivity	91.5 dB
Qts	1.12
VC diam.	25.4 mm
Power	120 W
Dome Mat.	Fabric

- Cast aluminum faceplate
- Copper cap for reduced voice coil inductance and minimum phase shift
- Fine weave soft fabric dome for smooth frequency response
- Flow optimized vented pole piece for optimum coupling to rear chamber
- Saturation controlled motor system for low distortion



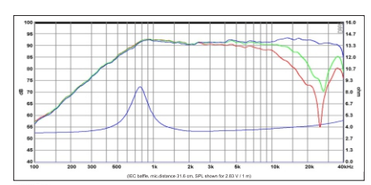

SB26ST-C000-5

Impedance	5 Ω
Fs	870 Hz
Sensitivity	91 dB
Qts	1.24
VC diam.	25.4 mm
Power	80 W
Dome Mat.	Fabric

- Optimized camping in pole cavity to eliminate internal reflection
- Fine weave soft fabric dome for smooth frequency response
- Saturation controlled motor system for reduced distortion
- CCAW voice coil for low moving mass
- Long life silver lead wires



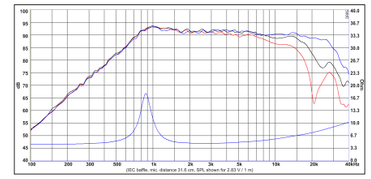

SB26STCN-C000-4

Impedance	4 Ω
Fs	960 Hz
Sensitivity	92.5 dB
Qts	0.84
VC diam.	25.4 mm
Power	120 W
Dome Mat.	Fabric

- Copper cap on pole piece for reduced voice coil inductance and minimum phase shift
- Internal pressure equalization and flow resistor for non-resonant coupling of cavities
- Fine weave soft fabric dome for smooth frequency response
- Inherently shielded neodymium motor system
- Compact design



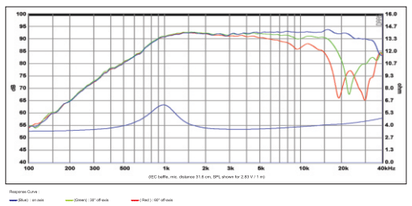

SB26STWGC-4

Impedance	4 Ω
Fs	780 Hz
Sensitivity	93 dB
Qts	1.2
VC diam.	25.4 mm
Power	120 W
Dome Mat.	Fabric

- Solid aluminum waveguide
- Controlled directivity
- Adapter ring for bolt-less mounting to driver
- Copper cap for reduced voice coil inductance and minimum phase shift
- Fine weave soft fabric dome for smooth frequency response



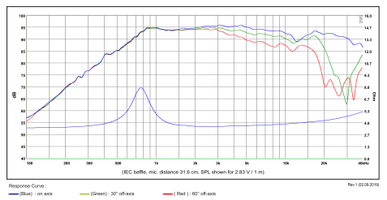

SB29BNC-C000-4

Impedance	4 Ω
Fs	950 Hz
Sensitivity	95 dB
Qts	0.69
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non resonant high frequency extension
- Copper cap on pole piece for reduced voice coil inductance and minimum phase shift
- Inherently shielded neodymium motor system
- CCAW voice coil for low moving mass



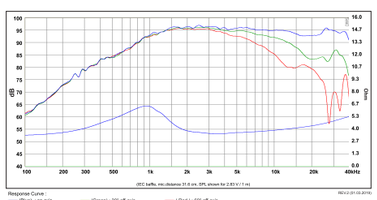

SB29BAC-C000-4

Impedance	4 Ω
Fs	650 Hz
Sensitivity	93 dB
Qts	0.84
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Large surround dome for increased acoustics output
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- Dual balanced compression chambers for improved dynamics



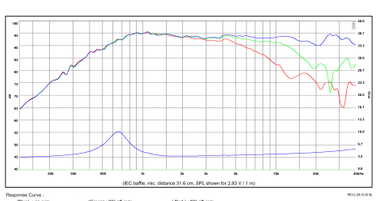

SB29SDAC-C000-4

Impedance	4 Ω
Fs	600 Hz
Sensitivity	93 dB
Qts	0.8
VC diam.	29.0 mm
Power	60 W
Dome Mat.	Fabric

- Large surround dome for increased acoustics output
- Dual balanced compression chamber for improved dynamics
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- Non-reflective rear chamber with optimized damping for improved dynamics



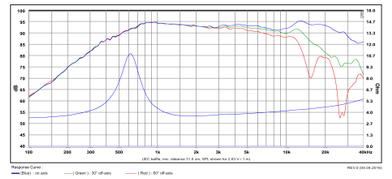

SB29SDNC-C000-4

Impedance	4 Ω
Fs	630 Hz
Sensitivity	95.5 dB
Qts	0.49
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Copper cap on pole piece for reduced voice coil inductance and minimum phase shift
- Large surround dome for increased acoustic output
- Inherently shielded neodymium motor system
- CCAW voice coil for low moving mass



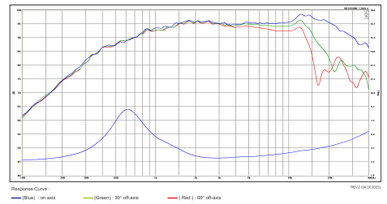

SB21RDC-C000-4

Impedance	4 Ω
Fs	760 Hz
Sensitivity	90 dB
Qts	1.0
VC diam.	20.4 mm
Power	40 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Dual balanced compression chamber for improved dynamics
- Copper cap for reduced voice coil inductance and minimum phase shift
- Saturation controlled motor system for low distortion
- CCAW voice coil for low moving mass



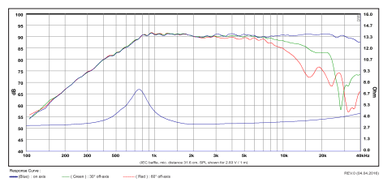

SB21RDCN-C000-4

Impedance	4 Ω
Fs	850 Hz
Sensitivity	89.5 dB
Qts	1.28
VC diam.	20.4 mm
Power	40 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Copper cap for reduced voice coil inductance and minimum phase shift
- Compact low distortion neodymium motor system
- Non-resonant rear chamber with optimized damping for improved dynamics
- CCAW voice coil for low moving mass



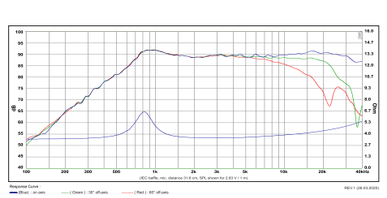

SB29RDNC-C000-4

Impedance	4 Ω
Fs	680 Hz
Sensitivity	94 dB
Qts	0.45
VC diam.	29.0 mm
Power	100 W
Dome Mat.	Fabric

- Copper cap on pole piece for reduced voice coil inductance and minimum phase shift
- Non-resonant diaphragm design for minimum high frequency break-up
- Inherently shielded neodymium motor system
- CCAW voice coil for low moving mass



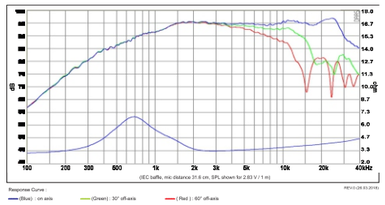

SB29RDAC-C000-4

Impedance	4 Ω
Fs	600 Hz
Sensitivity	93 dB
Qts	0.64
VC diam.	29.0 mm
Power	100 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Copper cap for reduced voice coil inductance and minimum phase shift
- Dual balanced compression chamber for improved dynamics
- Saturation controlled motor system for low distortion
- CCAW voice coil for low moving mass



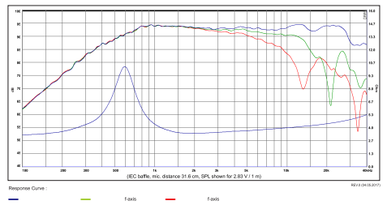

SATORI AT60NC-4

Impedance	4 Ω
Fs	2200 Hz
Sensitivity	91 dB
Freq. range	2400-30kHz
Sd	12.6 cm²
Power	100 W

- Precision diaphragm assembly
- Uniques foil damping
- Optimized rear chamber
- Two part faceplate
- Smooth controlled dispersion

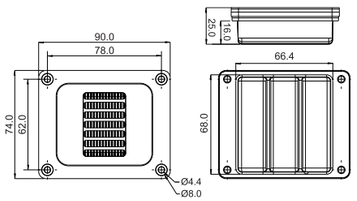

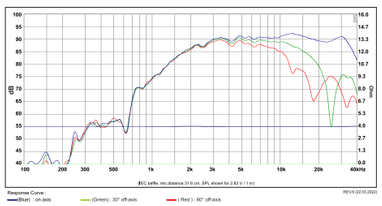

SATORI WG29-187

Waveguide material	Aluminum die cast
Waveguide finish	Black matte
Overall diameter	187 mm (7.36 inch)
Overal height	39 mm (1.53 inch)

- Suits all Satori Tw29 models
- Die cast aluminum waveguide
- Screwless driver mounting
- Adapter ring included
- Smooth controlled directivity



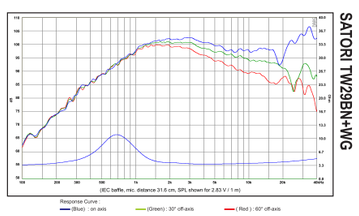

SATORI TW29TXNWG-4

Impedance	4 Ω
Fs	635 Hz
Sensitivity	96 dB
Qts	0.47
VC diam.	29.0 mm
Power	80 W
Dome Mat.	TeXtreme

- Advanced TeXtreme dome for non-resonant high frequency extension
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion



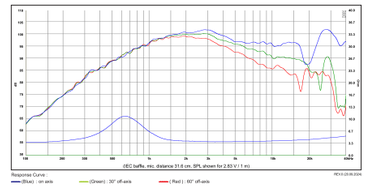

SATORI TW29BNWG-4

Impedance	4 Ω
Fs	700 Hz
Sensitivity	97 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual balanced compression chambers for improved dynamics
- Dual copper cap for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion



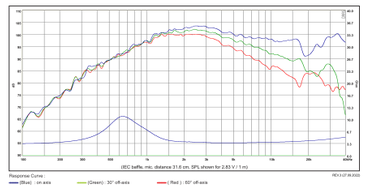

SATORI TW29BNWG-8

Impedance	8 Ω
Fs	750 Hz
Sensitivity	94 dB
Qts	0.55
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual balanced compression chambers for improved dynamics
- Dual copper cap for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion



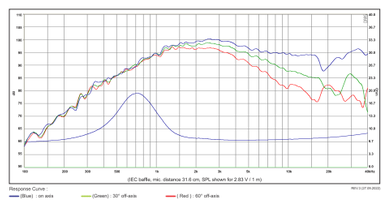

SATORI TW29TXN-B

Impedance	4 Ω
Fs	650 Hz
Sensitivity	96 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	TeXtreme

- Advanced TeXtreme dome
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil indutance and minimum phase shift



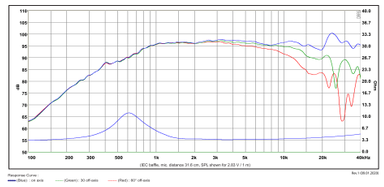

SATORI TW29TXN-B-8

Impedance	8 Ω
Fs	680 Hz
Sensitivity	93.5 dB
Qts	0.52
VC diam.	29.0 mm
Power	80 W
Dome Mat.	TeXtreme

- Advanced TeXtreme dome
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil indutance and minimum phase shift



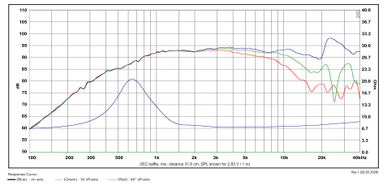

SATORI TW29B

Impedance	4 Ω
Fs	600 Hz
Sensitivity	92 dB
Qts	0.9
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift



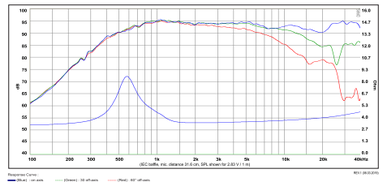

SATORI TW29B-B

Impedance	4 Ω
Fs	600 Hz
Sensitivity	92 dB
Qts	0.9
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift



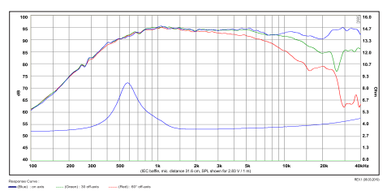

SATORI TW29BN

Impedance	4 Ω
Fs	700 Hz
Sensitivity	95 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece
- Dual balanced compression chambers for improved dynamics



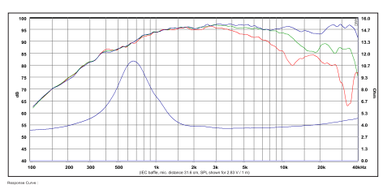

SATORI TW29BN-8

Impedance	8 Ω
Fs	750 Hz
Sensitivity	93.5 dB
Qts	0.55
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece
- Dual balanced compression chambers for improved dynamics



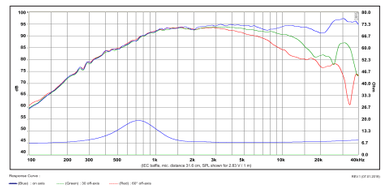

SATORI TW29BN-B

Impedance	4 Ω
Fs	700 Hz
Sensitivity	95 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece
- Dual balanced compression chambers for improved dynamics



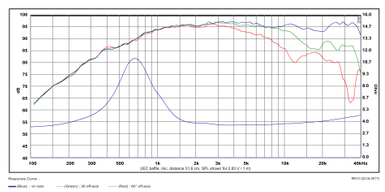

SATORI TW29BN-B-8

Impedance	8 Ω
Fs	750 Hz
Sensitivity	93.5 dB
Qts	0.55
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Beryllium

- Beryllium dome for non-resonant high frequency extension
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece
- Dual balanced compression chambers for improved dynamics



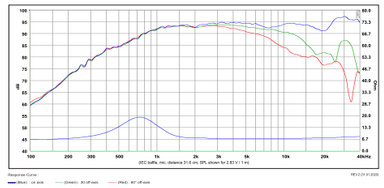

SATORI TW29D

Impedance	4 Ω
Fs	600 Hz
Sensitivity	93 dB
Qts	0.81
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustics output
- Dual balanced compression chamber for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



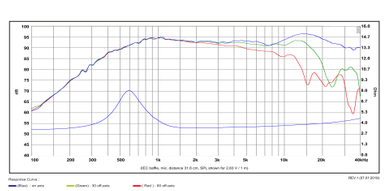

Tweeters

SATORI TW29D-B

Impedance	4 Ω
Fs	600 Hz
Sensitivity	92.5 dB
Qts	0.81
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustics output
- Dual balanced compression chamber for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



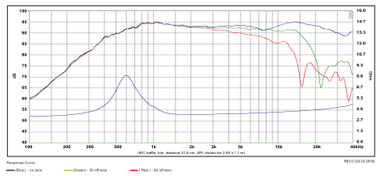

SATORI TW29DN

Impedance	4 Ω
Fs	650 Hz
Sensitivity	96.5 dB
Qts	0.43
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustic output
- High saturation neodymium motor system with T-shaped pole piece
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



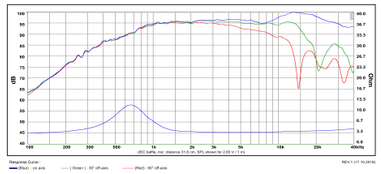

SATORI TW29DN-8

Impedance	8 Ω
Fs	650 Hz
Sensitivity	93 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustic output
- High saturation neodymium motor system with T-shaped pole piece
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



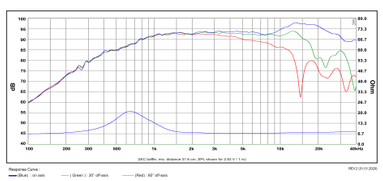

SATORI TW29DN-B

Impedance	4 Ω
Fs	650 Hz
Sensitivity	96 dB
Qts	0.43
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustic output
- High saturation neodymium motor system with T-shaped pole piece
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



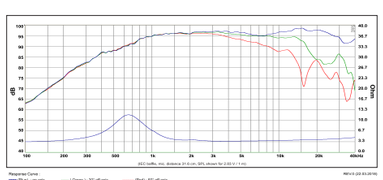

SATORI TW29DN-B-8

Impedance	8 Ω
Fs	650 Hz
Sensitivity	93 dB
Qts	0.46
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Large surround dome for increased acoustic output
- High saturation neodymium motor system with T-shaped pole piece
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Two part aluminum faceplate with integrated mechanical decoupling



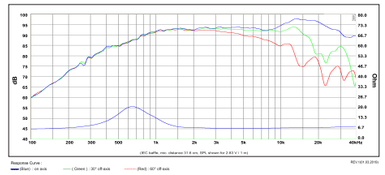

SATORI TW29R

Impedance	4 Ω
Fs	600 Hz
Sensitivity	92 dB
Qts	0.77
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Low resonance frequency for extended range



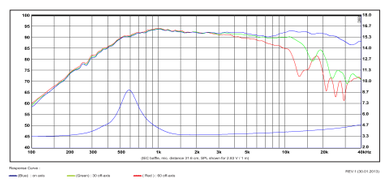

SATORI TW29R-B

Impedance	4 Ω
Fs	600 Hz
Sensitivity	92 dB
Qts	0.77
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- Low resonance frequency for extended range



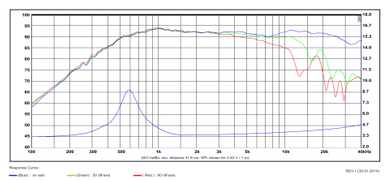

SATORI TW29RN

Impedance	4 Ω
Fs	700 Hz
Sensitivity	96 dB
Qts	0.49
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion



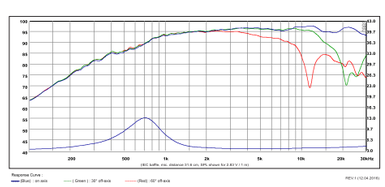

SATORI TW29RN-8

Impedance	8 Ω
Fs	650 Hz
Sensitivity	93 dB
Qts	0.48
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower saturation
- Dual balanced compression chambers for improved dynamics



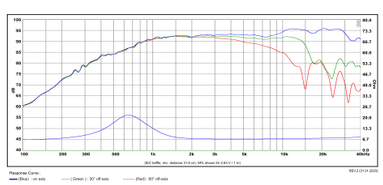

SATORI TW29RN-B

Impedance	4 Ω
Fs	700 Hz
Sensitivity	96 dB
Qts	0.49
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Two part aluminum faceplate with integrated mechanical decoupling
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion



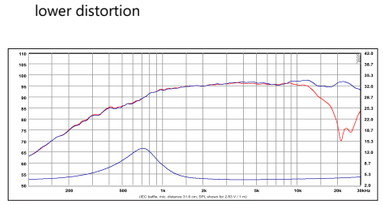

SATORI TW29RN-B-8

Impedance	8 Ω
Fs	650 Hz
Sensitivity	93 dB
Qts	0.48
VC diam.	29.0 mm
Power	80 W
Dome Mat.	Fabric

- Non-resonant diaphragm design for minimum high frequency break-up
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower saturation
- Dual balanced compression chambers for improved dynamics



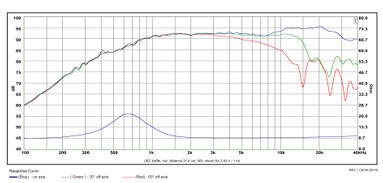

2.5" SATORI MD60N-6

Impedance	6 Ω
Fs	400 Hz
Sensitivity	95 dB
Qts	-
VC diam.	60.5 mm
Vas	-
Dome Mat.	Fabric

- Coated non-resonant soft dome
- Powerful neodymium motor system
- Tuned closed-end transmission line chamber
- Machined aluminum faceplate
- Vented coil former

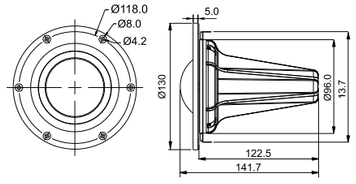

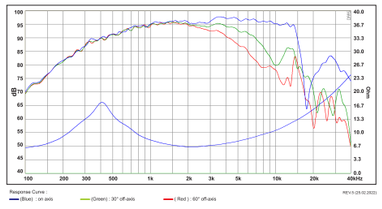

1" SB36WBAC21-4

Impedance	4 Ω
Fs	200 Hz
Sensitivity	77 dB
Qts	0.41
Xmax (p-p)	3.5 mm
Vas	0.021 liters
Cone Mat.	Aluminum

- Long stroke design
- Vented low compression design
- Resonance and break-up control
- Ferrofluid Cooled
- Low resonance frequency

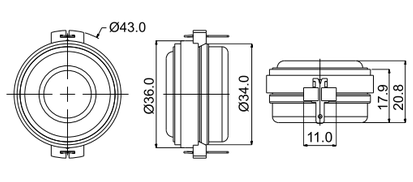

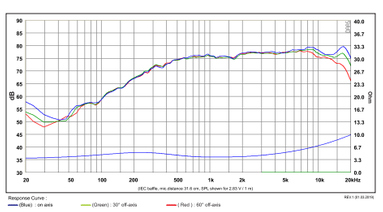

1" SB36WBAC21-8

Impedance	8 Ω
Fs	160 Hz
Sensitivity	75 dB
Qts	0.61
Xmax (p-p)	3.5 mm
Vas	0.035 liters
Cone Mat.	Aluminum

- Long stroke design
- Vented low compression design
- Resonance and break-up control
- Ferrofluid Cooled
- Low resonance frequency

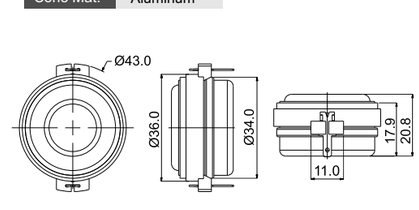

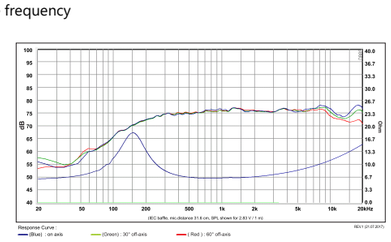

2.5" SB65WBAC25-4

Impedance	4 Ω
Fs	115 Hz
Sensitivity	83.5 dB
Qts	0.68
Xmax (p-p)	5.3 mm
Vas	0.43 liters
Cone Mat.	Aluminum

- Geometrically furrowed aluminum cone for extended usable frequency range
- Copper cap for increased high frequency output, reduced phase shift at higher frequencies and improved power handling capability
- Linear neodymium motor system for reduced distortion
- Vented voice coil former for reduced compression



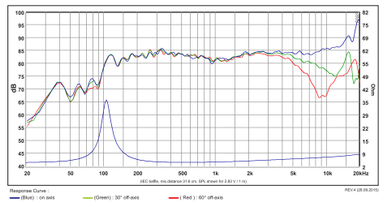

3" SB10PGC21-4

Impedance	4 Ω
Fs	89 Hz
Sensitivity	84 dB
Qts	0.92
Xmax (p-p)	4.5 mm
Vas	1.2 liters
Cone Mat.	Fiber Glass

- Optimized fiber glass cone for smooth response
- Low damping surround and non-conductive voice coil former to ensure good dynamics and transparent sound character with fine detail
- Vented voice coil for heat exchange and reduced compression
- Light weight CCAW voice coil



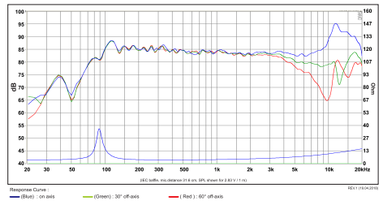

4" SB12MNRX2-25-4

Impedance	4 Ω
Fs	63.5 Hz
Sensitivity	90.5 dB
Qts	0.32
Xmax (p-p)	4.4 mm
Vas	5.3 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibres made in-house
- Shorting ring in motor system for reduced distortion
- Shortened voice coil optimized for pure midrange reproduction
- High damping Butyl rubber surround for non-resonant sound character
- Vented pole piece for reduced compression



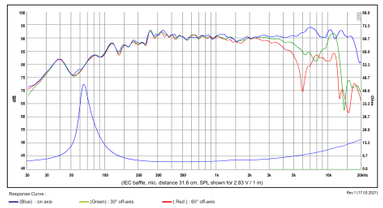

5" SATORI MR13TX-4

Impedance	4 Ω
Fs	44 Hz
Sensitivity	90 dB
Qts	0.27
Xmax (p-p)	6 mm
Vas	12.2 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Inverted soft low damping rubber surround
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



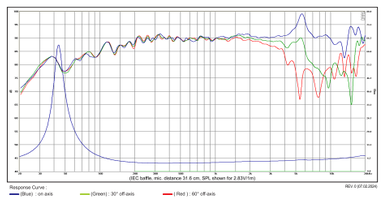

5" SATORI MR13P-4

Impedance	4 Ω
Fs	41 Hz
Sensitivity	91 dB
Qts	0.23
Xmax (p-p)	6 mm
Vas	19.4 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



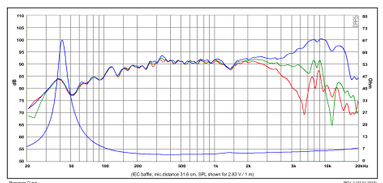

5" SATORI MR13P-8

Impedance	8 Ω
Fs	45 Hz
Sensitivity	88 dB
Qts	0.31
Xmax (p-p)	6 mm
Vas	12.5 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



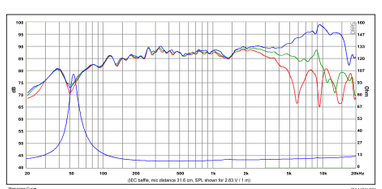

5" SATORI MR13PNW-4

Impedance	4 Ω
Fs	41 Hz
Sensitivity	91 dB
Qts	0.23
Xmas (p-p)	6 mm
Vas	19.4 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



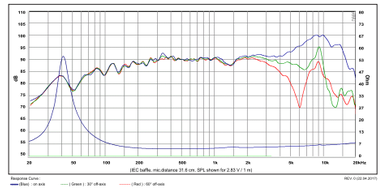

5" SATORI MR13PNW-8

Impedance	8 Ω
Fs	47 Hz
Sensitivity	88 dB
Qts	0.30
Xmax (p-p)	6 mm
Vas	12.9 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



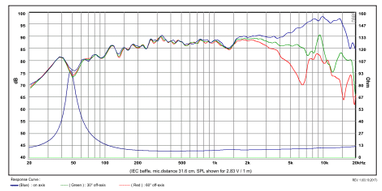

6.5" SATORI MR16TX-8

Impedance	8 Ω
Fs	35 Hz
Sensitivity	89 dB
Qts	0.31
Xmax (p-p)	5.7 mm
Vas	38.9 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Inverted soft low damping rubber surround
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



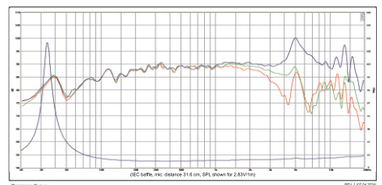

6.5" SATORI MR16P-4

Impedance	4 Ω
Fs	31 Hz
Sensitivity	92 dB
Qts	0.25
Xmax (p-p)	6.2 mm
Vas	47.2 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



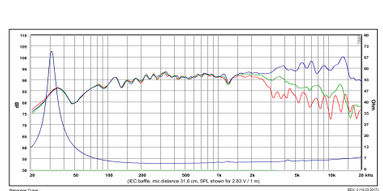

6.5" SATORI MR16P-8

Impedance	8 Ω
Fs	32 Hz
Sensitivity	88 dB
Qts	0.3
Xmax (p-p)	6.2 mm
Vas	44.3 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



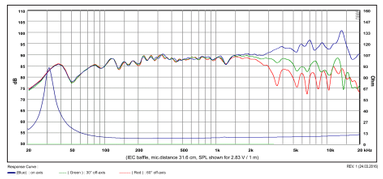

6.5" SATORI MR16PNW-4

Impedance	4 Ω
Fs	31 Hz
Sensitivity	92.5 dB
Qts	0.25
Xmax (p-p)	6.2 mm
Vas	47.2 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



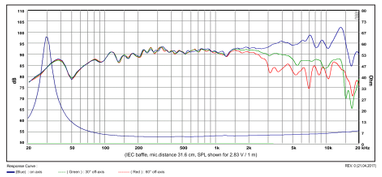

6.5" SATORI MR16PNW-8

Impedance	8 Ω
Fs	31 Hz
Sensitivity	88.5 dB
Qts	0.32
Xmax (p-p)	6.2 mm
Vas	44.8 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



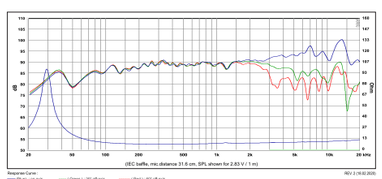

4" SB12CACS25-4

Impedance	4 Ω
Fs	51 Hz
Sensitivity	88 dB
Qts	0.31
Xmax (p-p)	10 mm
Vas	5.7 liters
Cone Mat.	Ceramic

- Ceramic cone
- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Non-conducting fibre glass voice coil former for minimum damping



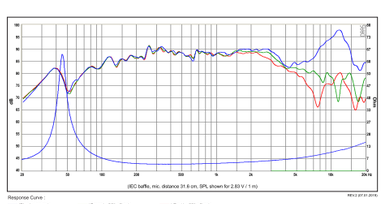

4" SB12CACS25-8

Impedance	8 Ω
Fs	51 Hz
Sensitivity	85.5 dB
Qts	0.37
Xmax (p-p)	10 mm
Vas	6.5 liters
Cone Mat.	Ceramic

- Ceramic cone
- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Non-conducting fibre glass voice coil former for minimum damping



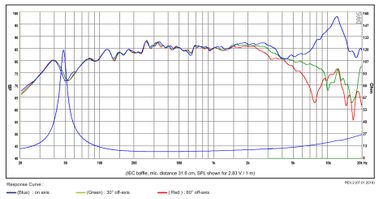

5" SB15CAC30-4

Impedance	4 Ω
Fs	32.5 Hz
Sensitivity	88 dB
Qts	0.31
Xmas (p-p)	10 mm
Vas	20.2 liters
Cone Mat.	Ceramic

- Geometrically reinforced ceramic cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Vented pole piece for reduced compression



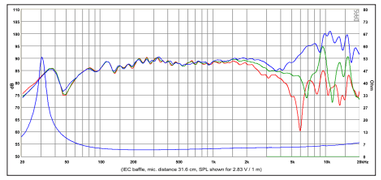

5" SB15CAC30-8

Impedance	8 Ω
Fs	35.5 Hz
Sensitivity	86 dB
Qts	0.38
Xmax (p-p)	10 mm
Vas	17.9 liters
Cone Mat.	Ceramic

- Geometrically reinforced ceramic cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Vented pole piece for reduced compression



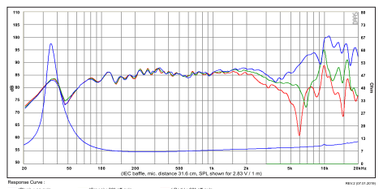

6" SB17CAC35-4

Impedance	4 Ω
Fs	29.5 Hz
Sensitivity	90 dB
Qts	0.29
Xmax (p-p)	11 mm
Vas	37.8 liters
Cone Mat.	Ceramic

- Geometrically reinforced ceramic cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping surround for improved transient response
- Vented pole piece for reduced compression



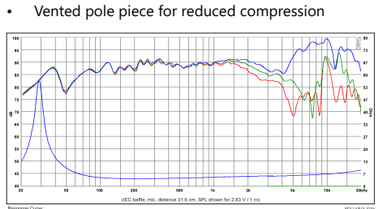

6" SB17CAC35-8

Impedance	8 Ω
Fs	28 Hz
Sensitivity	86.5 dB
Qts	0.36
Xmax (p-p)	11 mm
Vas	42 liters
Cone Mat.	Ceramic

- Extended copper sleeve on pole piece for low inductance and low distortion
- Geometrically reinforced ceramic cone for optimum piston operation and reduced break-up
- Soft low damping surround for improved transient response
- Vented pole piece for reduced compression



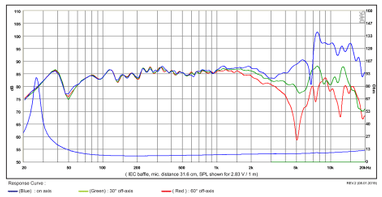

5" SB15CRC30-4

Impedance	4 Ω
Fs	37 Hz
Sensitivity	88.5 dB
Qts	0.32
Xmax (p-p)	11 mm
Vas	17.3 liters
Cone Mat.	Carbon

- Rohacell/Carbon fibre sandwich cone for optimized stiffness/damping ratio
- Vented cast aluminum chassis for optimum strength and low compression
- Extended copper sleeve on pole piece for low inductance and low distortion
- Low damping rubber surround for improved transient response



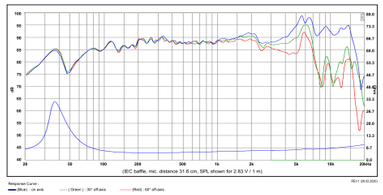

5" SB15CRC30-8

Impedance	8 Ω
Fs	40 Hz
Sensitivity	86 dB
Qts	0.41
Xmax (p-p)	11 mm
Vas	14.9 liters
Cone Mat.	Carbon

- Rohacell/Carbon fibre sandwich cone for optimized stiffness/damping ratio
- Vented cast aluminum chassis for optimum strength and low compression
- Extended copper sleeve on pole piece for low inductance and low distortion
- Low damping rubber surround for improved transient response



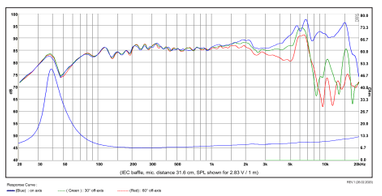

6" SB17CRC35-4

Impedance	4 Ω
Fs	31.5 Hz
Sensitivity	90 dB
Qts	0.32
Xmax (p-p)	11 mm
Vas	35.5 liters
Cone Mat.	Carbon

- Rohacell/Carbon fibre sandwich cone for optimized stiffness/damping ratio
- Vented cast aluminum chassis for optimum strength and low compression
- Extended copper sleeve on pole piece for low inductance and low distortion
- Low damping rubber surround for improved transient response



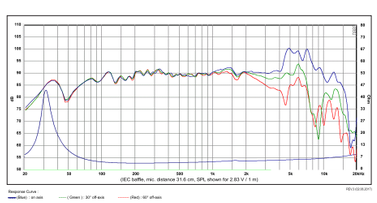

6" SB17CRC35-8

Impedance	8 Ω
Fs	28 Hz
Sensitivity	87 dB
Qts	0.34
Xmax (p-p)	11 mm
Vas	48 liters
Cone Mat.	Carbon

- Rohacell/Carbon fibre sandwich cone for optimized stiffness/damping ratio
- Vented cast aluminum chassis for optimum strength and low compression
- Extended copper sleeve on pole piece for low inductance and low distortion
- Low damping rubber surround for improved transient response



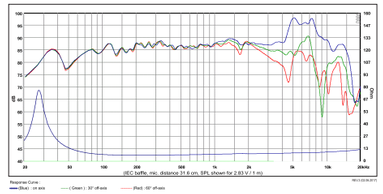

5" SB15MFC30-4

Impedance	4 Ω
Fs	35.5 Hz
Sensitivity	90 dB
Qts	0.28
Xmas (p-p)	10 mm
Vas	19.4 liters
Cone Mat.	Polypropylene

- Mineral filled PP-cone made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping



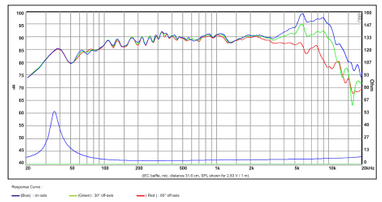

5" SB15MFC30-8

Impedance	8 Ω
Fs	39 Hz
Sensitivity	87 dB
Qts	0.37
Xmax (p-p)	10 mm
Vas	17.7 liters
Cone Mat.	Polypropylene

- Mineral filled PP-cone made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping



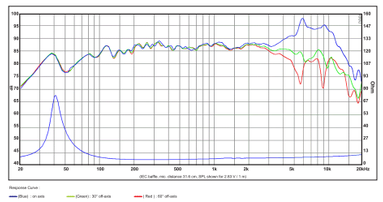

6" SB17MFC35-4

Impedance	4 Ω
Fs	30 Hz
Sensitivity	90 dB
Qts	0.28
Xmax (p-p)	11 mm
Vas	45 liters
Cone Mat.	Polypropylene

- Mineral filled PP-cone made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping



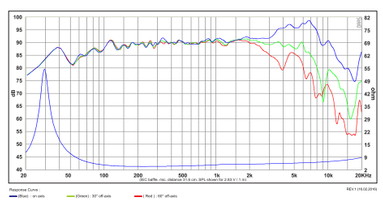

6" SB17MFC35-8

Impedance	8 Ω
Fs	33 Hz
Sensitivity	88 dB
Qts	0.37
Xmax (p-p)	11 mm
Vas	39 liters
Cone Mat.	Polypropylene

- Mineral filled PP-cone made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fibre glass voice coil former for minimum damping



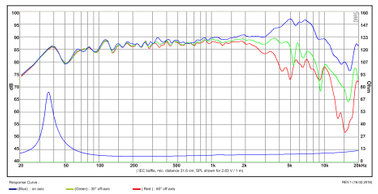

5" SB15NBAC30-4

Impedance	4 Ω
Fs	33 Hz
Sensitivity	88 dB
Qts	0.29
Xmax (p-p)	10 mm
Vas	21 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Vented cast aluminum chassis for optimum strength and low compression
- Non-conducting fibre glass voice coil former for minimum damping



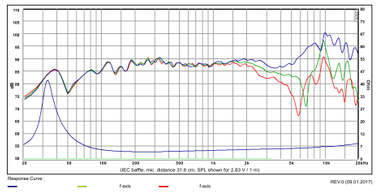

5" SB15NBAC30-8

Impedance	8 Ω
Fs	35.5 Hz
Sensitivity	85.5 dB
Qts	0.37
Xmax (p-p)	10 mm
Vas	17 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Vented cast aluminum chassis for optimum strength and low compression
- Non-conducting fibre glass voice coil former for minimum damping



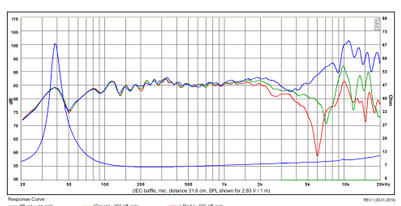

6" SB17NBAC35-4

Impedance	4 Ω
Fs	30 Hz
Sensitivity	90 dB
Qts	0.29
Xmax (p-p)	11 mm
Vas	42.6 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Vented cast aluminum chassis for optimum strength and low compression
- Non-conducting fibre glass voice coil former for minimum damping



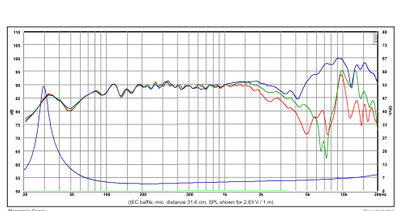

6" SB17NBAC35-8

Impedance	8 Ω
Fs	31.5 Hz
Sensitivity	86.5 dB
Qts	0.35
Xmax (p-p)	11 mm
Vas	45 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Extended copper sleeve on pole piece for low inductance and low distortion
- Vented cast aluminum chassis for optimum strength and low compression
- Non-conducting fibre glass voice coil former for minimum damping



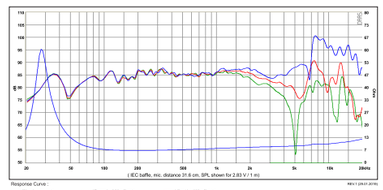

4" SB12NRX25-4

Impedance	4 Ω
Fs	55 Hz
Sensitivity	87.5 dB
Qts	0.4
Xmas (p-p)	10 mm
Vas	5.6 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibres made in-house
- Shorting ring in motor system for reduced distortion
- High damping Butyl rubber surround for non-resonant sound character
- Vented pole piece for reduced compression
- CCAW voice coil for reduced moving mass



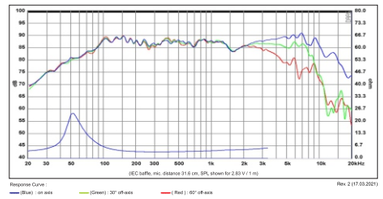

4" SB12NRX25-8

Impedance	8 Ω
Fs	57 Hz
Sensitivity	85.5 dB
Qts	0.37
Xmax (p-p)	10 mm
Vas	5.3 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibres made in-house
- Shorting ring in motor system for reduced distortion
- High damping Butyl rubber surround for non-resonant sound character
- Vented pole piece for reduced compression
- CCAW voice coil for reduced moving mass



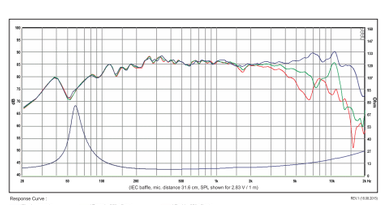

5" SB15NRX2C30-4

Impedance	4 Ω
Fs	34.5 Hz
Sensitivity	89.5 dB
Qts	0.28
Xmax (p-p)	10 mm
Vas	20.5 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibres made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- CCAW voice coil for reduced moving mass



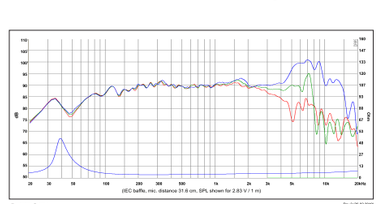

5" SB15NRX2C30-8

Impedance	8 Ω
Fs	36.5 Hz
Sensitivity	86.5 dB
Qts	0.34
Xmax (p-p)	10 mm
Vas	20.0 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibres made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- CCAW voice coil for reduced moving mass



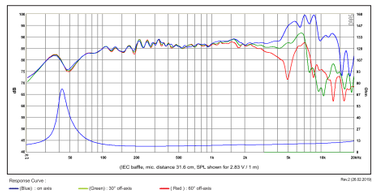

6" SB17NRX2L35-4

Impedance	4 Ω
Fs	41 Hz
Sensitivity	92 dB
Qts	0.25
Xmax (p-p)	9.6 mm
Vas	21.9 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibers made in-house
- Extended copper sleeve on pole piece for low inductance and low distor
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- Extra large motor with extended copper sleeve on pole piece



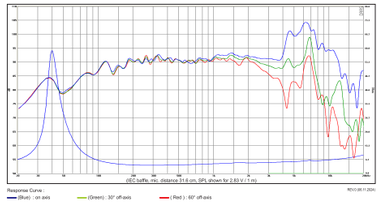

6" SB17NRX2L35-8

Impedance	8 Ω
Fs	37.8 Hz
Sensitivity	89 dB
Qts	0.28
Xmax (p-p)	9.6 mm
Vas	26.1 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibers made in-house
- Extended copper sleeve on pole piece for low inductance and low distor
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- Extra large motor with extended copper sleeve on pole piece



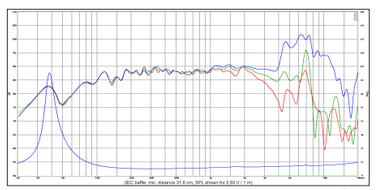

6" SB17NRX2C35-4

Impedance	4 Ω
Fs	36 Hz
Sensitivity	90 dB
Qts	0.37
Xmax (p-p)	11 mm
Vas	27.6 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibers made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- CCAW voice coil for reduced moving mass



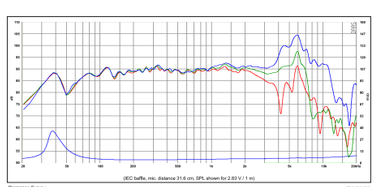

6" SB17NRX2C35-8

Impedance	8 Ω
Fs	36.5 Hz
Sensitivity	87 dB
Qts	0.42
Xmax (p-p)	11 mm
Vas	27 liters
Cone Mat.	Norex

- Proprietary cone material with natural fibers made in-house
- Extended copper sleeve on pole piece for low inductance and low distortion
- Soft low damping rubber surround for improved transient response
- Non-conducting fiber glass voice coil former for minimum damping
- CCAW voice coil for reduced moving mass



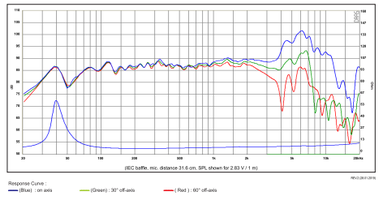

4" SB12PACR25-4

Impedance	4 Ω
Fs	52.5 Hz
Sensitivity	87 dB
Qts	0.31
Xmas (p-p)	10 mm
Vas	5.3 liters
Cone Mat.	Aluminum

- Vented reinforced plastic chassis
- Anodised aluminum cone
- Low damping rubber surround
- Large vented motor system
- Long stroke linear suspension



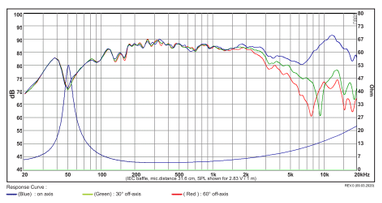

4" SB12PAC25-4

Impedance	4 Ω
Fs	52.5 Hz
Sensitivity	87 dB
Qts	0.31
Xmax (p-p)	10 mm
Vas	5.3 liters
Cone Mat.	Aluminum

- Vented reinforced plastic chassis
- Anodised aluminum cone
- Low damping rubber surround
- Large vented motor system
- Long stroke linear suspension



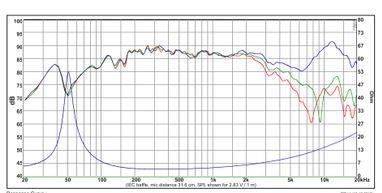

4" SB12PFCR25-4

Impedance	4 Ω
Fs	58 Hz
Sensitivity	87.5 dB
Qts	0.43
Xmax (p-p)	9.8 mm
Vas	5.2 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Butyl rubber surround for smooth frequency response
- Vented motor system for low compression
- Long stroke linear suspension for improved dynamics



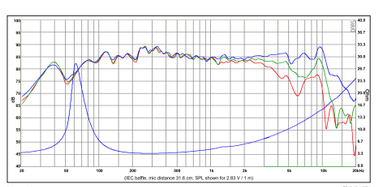

4" SB12PFCR25-8

Impedance	8 Ω
Fs	59 Hz
Sensitivity	84 dB
Qts	0.48
Xmax (p-p)	10 mm
Vas	5.3 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Butyl rubber surround for smooth frequency response
- Vented motor system for low compression
- Long stroke linear suspension for improved dynamics



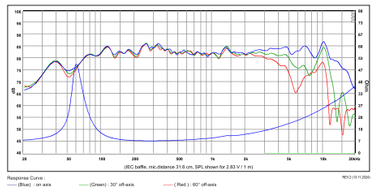

5" SB13PFCR25-4

Impedance	4 Ω
Fs	44 Hz
Sensitivity	89 dB
Qts	0.29
Xmax (p-p)	9 mm
Vas	13.4 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Soft low damping rubber surround for improved transient response
- Optimized motor system
- Vented coil former for low compression



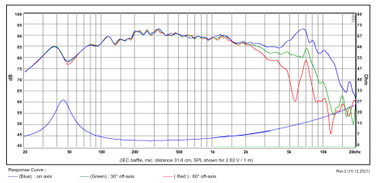

5" SB13PFCR25-8

Impedance	8 Ω
Fs	45 Hz
Sensitivity	87 dB
Qts	0.33
Xmax (p-p)	9 mm
Vas	13.4 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Soft low damping rubber surround for improved transient response
- Optimized motor system
- Vented coil former for low compression



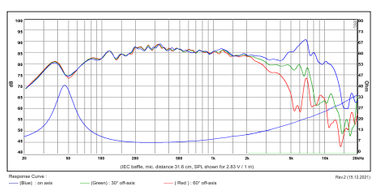

6" SB16PFCR25-4

Impedance	4 Ω
Fs	35 Hz
Sensitivity	89.5 dB
Qts	0.34
Xmax (p-p)	9 mm
Vas	32.7 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Soft low damping rubber surround for improved transient response
- Optimized motor system
- Vented coil former for low compression



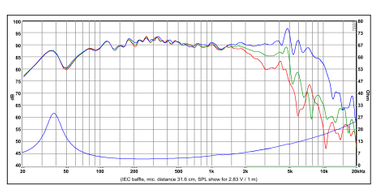

6" SB16PFCR25-8

Impedance	8 Ω
Fs	38 Hz
Sensitivity	87 dB
Qts	0.40
Xmax (p-p)	9 mm
Vas	27 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Soft low damping rubber surround for improved transient response
- Optimized motor system
- Vented coil former for low compression



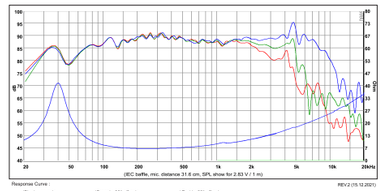

5" SATORI MW13TX-4

Impedance	4 Ω
Fs	38 Hz
Sensitivity	89 dB
Qts	0.26
Xmas (p-p)	10 mm
Vas	16.0 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



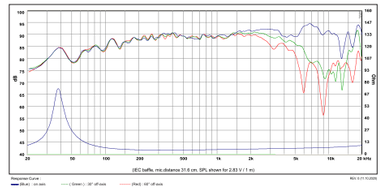

5" SATORI MW13TX-8

Impedance	8 Ω
Fs	40 Hz
Sensitivity	87 dB
Qts	0.32
Xmax (p-p)	10 mm
Vas	14.8 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



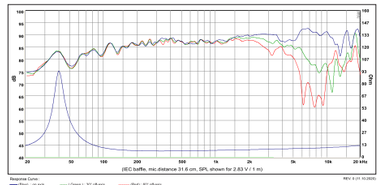

5" SATORI MW13P-4

Impedance	4 Ω
Fs	41 Hz
Sensitivity	89 dB
Qts	0.27
Xmax (p-p)	10 mm
Vas	14.6 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



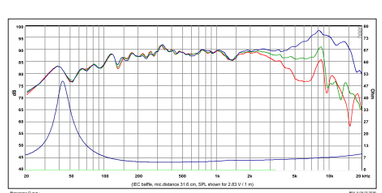

5" SATORI MW13P-8

Impedance	8 Ω
Fs	41.5 Hz
Sensitivity	87 dB
Qts	0.30
Xmax (p-p)	10 mm
Vas	15.0 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



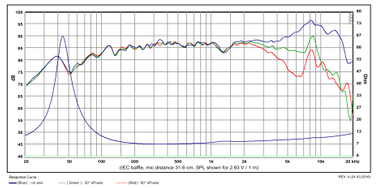

5" SATORI MW13PNW-4

Impedance	4 Ω
Fs	41 Hz
Sensitivity	89 dB
Qts	0.27
Xmax (p-p)	10 mm
Vas	14.6 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



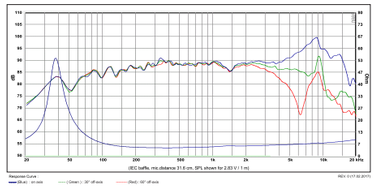

5" SATORI MW13PNW-8

Impedance	8 Ω
Fs	41 Hz
Sensitivity	87 dB
Qts	0.31
Xmax (p-p)	10 mm
Vas	15.0 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



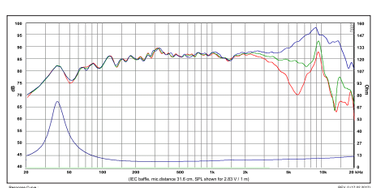

6.5" SATORI MW16TX-4

Impedance	4 Ω
Fs	29 Hz
Sensitivity	90.5 dB
Qts	0.27
Xmax (p-p)	12 mm
Vas	48 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



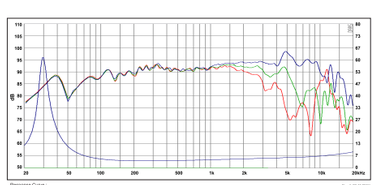

6.5" SATORI MW16TX-8

Impedance	8 Ω
Fs	29.3 Hz
Sensitivity	87.5 dB
Qts	0.33
Xmax (p-p)	12 mm
Vas	48 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



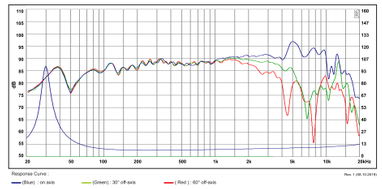

6.5" SATORI MW16P-4

Impedance	4 Ω
Fs	28 Hz
Sensitivity	90.5 dB
Qts	0.27
Xmas (p-p)	12 mm
Vas	50.2 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



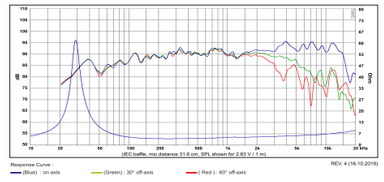

6.5" SATORI MW16P-8

Impedance	8 Ω
Fs	29 Hz
Sensitivity	87.5 dB
Qts	0.33
Xmax (p-p)	12 mm
Vas	48 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



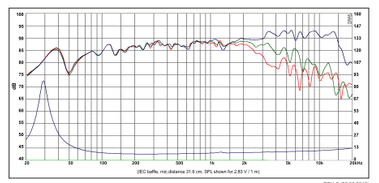

6.5" SATORI MW16P-12

Impedance	12 Ω
Fs	30.6 Hz
Sensitivity	85 dB
Qts	0.37
Xmax (p-p)	12.4 mm
Vas	47.3 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



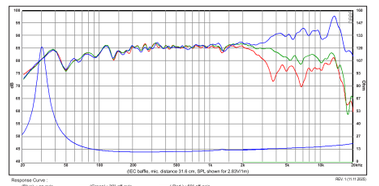

6.5" SATORI MW16PNW-4

Impedance	4 Ω
Fs	28 Hz
Sensitivity	91 dB
Qts	0.27
Xmax (p-p)	12 mm
Vas	51.8 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



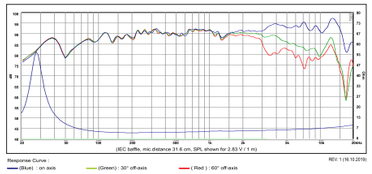

6.5" SATORI MW16PNW-8

Impedance	8 Ω
Fs	29 Hz
Sensitivity	88 dB
Qts	0.32
Xmax (p-p)	12 mm
Vas	49.9 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



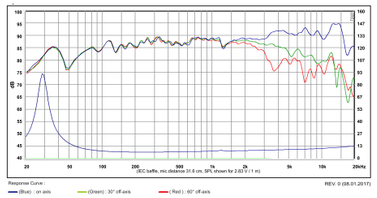

7.5" SATORI MW19TX-4

Impedance	4 Ω
Fs	32 Hz
Sensitivity	93 dB
Qts	0.27
Xmax (p-p)	13.6 mm
Vas	53.2 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



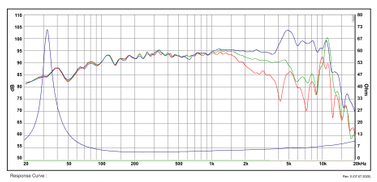

7.5" SATORI MW19TX-8

Impedance	8 Ω
Fs	33 Hz
Sensitivity	90 dB
Qts	0.33
Xmax (p-p)	13.4 mm
Vas	53.4 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone
- Vented aerodynamic cast aluminum chassis
- Advanced BIMAX spider
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece



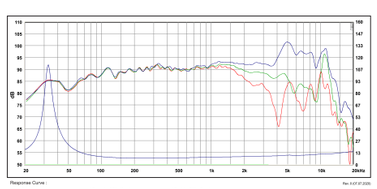

7.5" SATORI MW19P-4

Impedance	4 Ω
Fs	29 Hz
Sensitivity	91.5 dB
Qts	0.24
Xmax (p-p)	13.6 mm
Vas	61 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



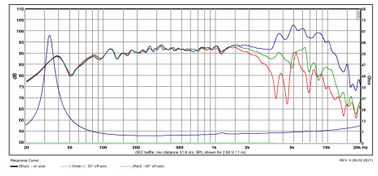

7.5" SATORI MW19P-8

Impedance	8 Ω
Fs	29.5 Hz
Sensitivity	89 dB
Qts	0.29
Xmax (p-p)	13.4 mm
Vas	61 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



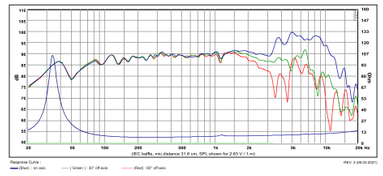

7.5" SATORI MW19PNW-4

Impedance	4 Ω
Fs	29 Hz
Sensitivity	91.5 dB
Qts	0.24
Xmas (p-p)	13.6 mm
Vas	61 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



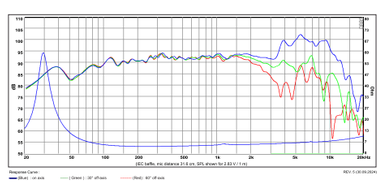

7.5" SATORI MW19PNW-8

Impedance	8 Ω
Fs	29.5 Hz
Sensitivity	89 dB
Qts	0.29
Xmax (p-p)	13.4 mm
Vas	61 liters
Cone Mat.	Egyptian Papyrus

- Proprietary cone material with Egyptian Papyrus fibres made in-house
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Extended copper sleeve on pole piece for low inductance and reduced distortion



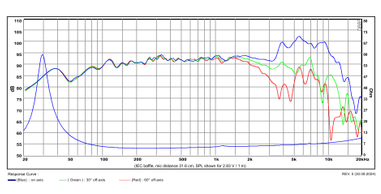

5"x8" SB15SFCR39-4

Impedance	4 Ω
Fs	31 Hz
Sensitivity	90 dB
Qts	0.32
Xmax (p-p)	11 mm
Vas	49.9 liters
Cone Mat.	Paper

- Racetrack design
- Hard Paper cone (made in-house)
- Optimized motor system
- Non-conductive reinforced vented coil former
- Symmetric suspension



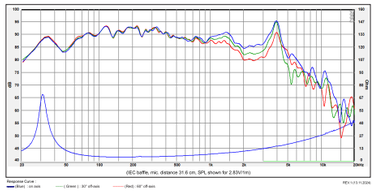

5"x8" SB15SFCR39-8

Impedance	8 Ω
Fs	32 Hz
Sensitivity	87.0 dB
Qts	0.42
Xmax (p-p)	10 mm
Vas	48.3 liters
Cone Mat.	Paper

- Racetrack design
- Hard Paper cone (made in-house)
- Optimized motor system
- Non-conductive reinforced vented coil former
- Symmetric suspension



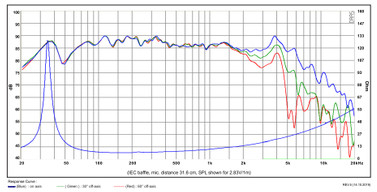

8" SB23CACS45-4

Impedance	4 Ω
Fs	23 Hz
Sensitivity	90 dB
Qts	0.33
Xmax (p-p)	13 mm
Vas	95 liters
Cone Mat.	Ceramic

- Geometrically reinforced ceramic cone for improved break-up control
- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Shallow design



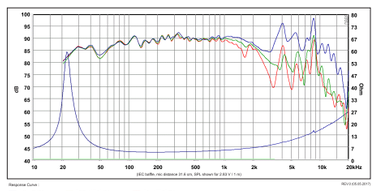

8" SB23CACS45-8

Impedance	8 Ω
Fs	25 Hz
Sensitivity	87.5 dB
Qts	0.40
Xmax (p-p)	13 mm
Vas	87 liters
Cone Mat.	Ceramic

- Geometrically reinforced ceramic cone for improved break-up control
- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Shallow design



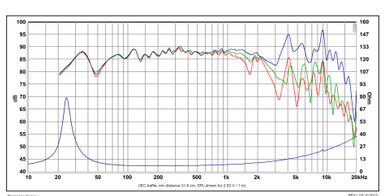

8" SB23NBACS45-4

Impedance	4 Ω
Fs	23 Hz
Sensitivity	90 dB
Qts	0.33
Xmax (p-p)	13 mm
Vas	95 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for improved break-up control
- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Shallow design



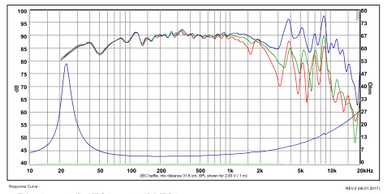

8" SB23NBACS45-8

Impedance	8 Ω
Fs	25 Hz
Sensitivity	87.5 dB
Qts	0.40
Xmax (p-p)	13 mm
Vas	93.4 liters
Cone Mat.	Aluminum

- Geometrically reinforced aluminum cone for improved break-up control
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Vented cast aluminum chassis for optimum strength and low compression
- Shallow design



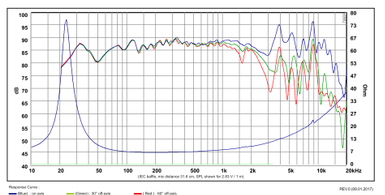

10" SB26SFCL38-4

Impedance	4 Ω
Fs	27.4 Hz
Sensitivity	91 dB
Qts	0.43
Xmas (p-p)	15.8 mm
Vas	104 liters
Cone Mat.	Paper

- Hard pressed vented paper cone
- Durable rubber surround
- Symmetric suspension
- Non-conductive coil former
- Long life litz wires



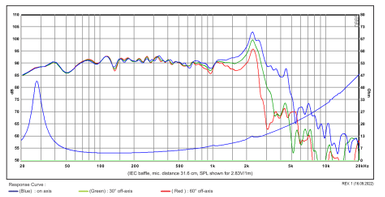

10" SB26SFCL38-8

Impedance	8 Ω
Fs	27.5 Hz
Sensitivity	88 dB
Qts	0.53
Xmax (p-p)	16.4 mm
Vas	107 liters
Cone Mat.	Paper

- Hard pressed vented paper cone
- Durable rubber surround
- Symmetric suspension
- Non-conductive coil former
- Long life litz wires



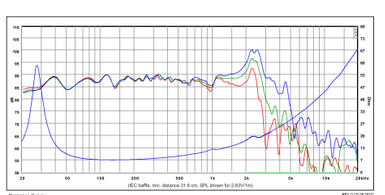

8" SB23NRXS45-4

Impedance	4 Ω
Fs	27 Hz
Sensitivity	92 dB
Qts	0.3
Xmax (p-p)	13 mm
Vas	87.5 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Vented pole piece for reduced compression
- Shallow design



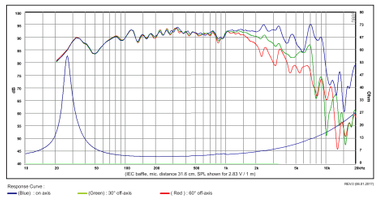

8" SB23NRXS45-8

Impedance	8 Ω
Fs	27 Hz
Sensitivity	88.5 dB
Qts	0.38
Xmax (p-p)	13 mm
Vas	94 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Soft low damping rubber surround for improved transient response
- Shorting ring in motor system for reduced distortion
- Vented pole piece for reduced compression
- Shallow design



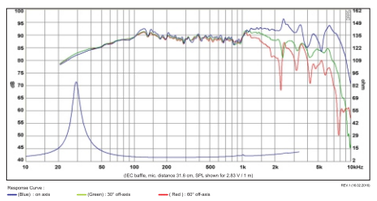

10" SB29NRX75-6

Impedance	6 Ω
Fs	21 Hz
Sensitivity	88 dB
Qts	0.35
Xmax (p-p)	22 mm
Vas	102 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Hard paper cone for improved piston operation (made in-house)
- Vented pole piece for minimum compression
- 3" copper voice coil for improved power handling
- Non-conducting fiber glass voice coil former for minimum damping



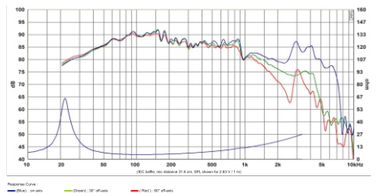

10" SB29NRX75-8

Impedance	8 Ω
Fs	26 Hz
Sensitivity	88 dB
Qts	0.37
Xmax (p-p)	22 mm
Vas	85.6 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Hard paper cone for improved piston operation (made in-house)
- Vented pole piece for minimum compression
- 3" copper voice coil for improved power handling
- Non-conducting fiber glass voice coil former for minimum damping



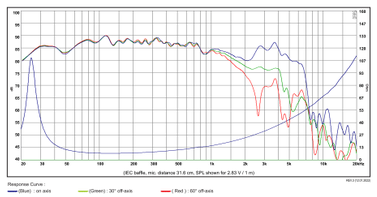

12" SB34NRX75-6

Impedance	6 Ω
Fs	19 Hz
Sensitivity	90 dB
Qts	0.40
Xmax (p-p)	22 mm
Vas	260 liters
Cone Mat.	Norex

- High flow venting center pole
- 3" voice coil
- Low dampening surround
- Non-conductive voice coil former
- Proprietary cone materials made in-house



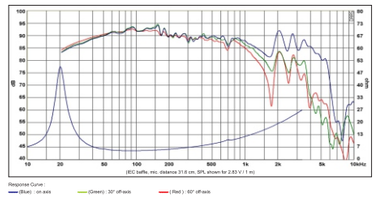

12" SB34NRX75-16

Impedance	16 Ω
Fs	25 Hz
Sensitivity	86 dB
Qts	0.71
Xmax (p-p)	22 mm
Vas	205 liters
Cone Mat.	Norex

- Designed for open baffle
- High flow venting center pole
- 3" CCAW voice coil
- Low dampening surround
- Non-conductive voice coil former



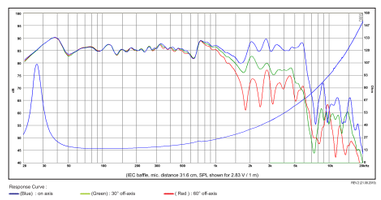

12" SB34NRXL75-8

Impedance	8 Ω
Fs	22 Hz
Sensitivity	91 dB
Qts	0.28
Xmas (p-p)	20 mm
Vas	205 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Hard paper cone for improved piston operation (made in-house)
- Large motor system with under-cut pole piece and dual shorting rings
- Vented pole piece for minimum compression
- 3" copper voice coil for improved power handling



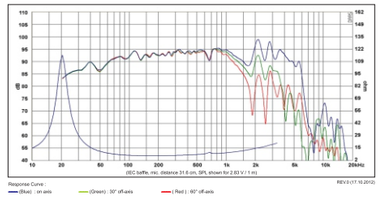

8" SB20PFCS30-7

Impedance	7 Ω
Fs	39 Hz
Sensitivity	88 5 dB
Qts	0.66
Xmax (p-p)	11 mm
Vas	59.5 liters
Cone Mat.	Paper

- Proprietary cone material with natural fibers made in-house
- Foam surround for maximum transparency and midrange resolution
- Large spider for improved linearity
- Vented motor system and coil former for low compression
- High Q design intended for sealed enclosures with series capacitor



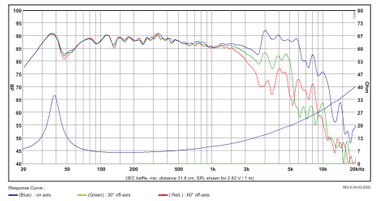

8" SB20PFCR30-4

Impedance	4 Ω
Fs	34 Hz
Sensitivity	92.5 dB
Qts	0.33
Xmax (p-p)	11.5 mm
Vas	66.2 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibres made in-house
- Soft low damping rubber surround for improved transient response
- Large spider for improved linearity
- Optimized motor system



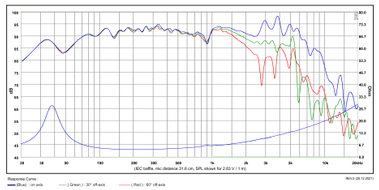

8" SB20PFCR30-8

Impedance	8 Ω
Fs	34 Hz
Sensitivity	90.5 dB
Qts	0.37
Xmax (p-p)	11.5 mm
Vas	66.2 liters
Cone Mat.	Paper

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibres made in-house
- Soft low damping rubber surround for improved transient response
- Large spider for improved linearity
- Optimized motor system



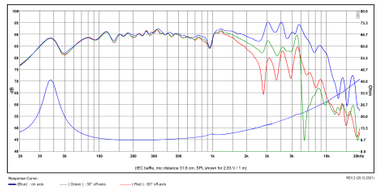

9.5" SATORI WO24TX-4

Impedance	4 Ω
Fs	26.3 Hz
Sensitivity	91 dB
Qts	0.35
Xmax (p-p)	17.5 mm
Vas	79 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone for improved piston operation
- Large optimized motor system with under-cut pole piece and dual shorting rings
- Linear symmetric suspension design for improved dynamic performance
- Long life silver lead wires attached 180° apart for improved stability



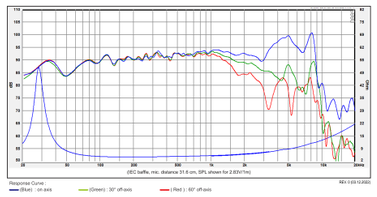

9.5" SATORI WO24TX-8

Impedance	8 Ω
Fs	24.5 Hz
Sensitivity	88 dB
Qts	0.34
Xmax (p-p)	17.1 mm
Vas	88 liters
Cone Mat.	TeXtreme

- Advanced TeXtreme cone for improved piston operation
- Large optimized motor system with under-cut pole piece and dual shorting rings
- Linear symmetric suspension design for improved dynamic performance
- Long life silver lead wires attached 180° apart for improved stability



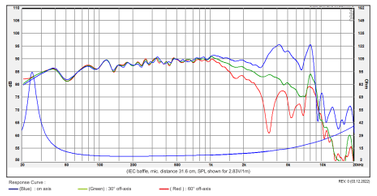

9.5" SATORI WO24P-4

Impedance	4 Ω
Fs	28 Hz
Sensitivity	91 dB
Qts	0.40
Xmax (p-p)	17 mm
Vas	71 liters
Cone Mat.	Paper

- Large optimized motor system with under-cut pole piece and dual shorting rings
- Hard paper cone for improved piston operation (made in-house)
- Linear symmetric suspension design for improved dynamic performance
- Long life silver lead wires attached 180° apart for improved stability



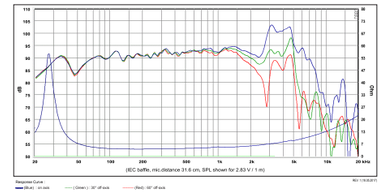

9.5" SATORI WO24P-8

Impedance	8 Ω
Fs	24.5 Hz
Sensitivity	88 dB
Qts	0.38
Xmax (p-p)	17 mm
Vas	87.5 liters
Cone Mat.	Paper

- Large optimized motor system with under-cut pole piece and dual shorting rings
- Hard paper cone for improved piston operation (made in-house)
- Linear symmetric suspension design for improved dynamic performance
- Long life silver lead wires attached 180° apart for improved stability



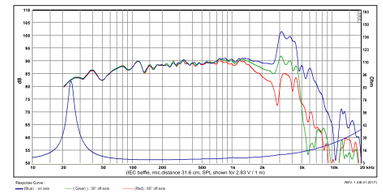

13.5" SATORI WO34HC-4

Impedance	4 Ω
Fs	20 Hz
Sensitivity	92.5 dB
Qts	0.23
Xmax (p-p)	16.6 mm
Vas	233 liters
Cone Mat.	Honeycomb

- Rigid honeycomb cone (black fiberglass skin layers)
- 3" copper voice coil with non-conductive fiberglass former
- Soft low damping rubber surround
- Large vented motor system with undercut pole piece and dual shorting rings



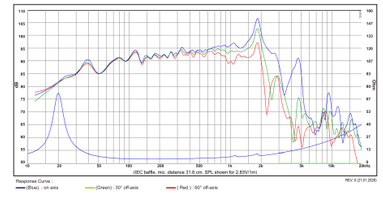

13.5" SATORI WO34HC-8

Impedance	8 Ω
Fs	20.2 Hz
Sensitivity	89.5 dB
Qts	0.29
Xmax (p-p)	16.6 mm
Vas	238 liters
Cone Mat.	Honeycomb

- Rigid honeycomb cone (black fiberglass skin layers)
- 3" copper voice coil with non-conductive fiberglass former
- Soft low damping rubber surround
- Large vented motor system with undercut pole piece and dual shorting rings



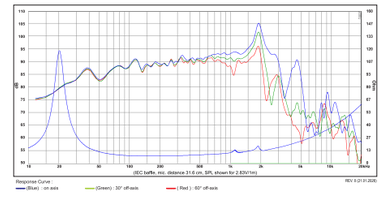

6" SB16FRPC25-7

Impedance	7 Ω
Fs	44 Hz
Sensitivity	91 dB
Qts	0.46
Xmax (p-p)	6.1 mm
Vas	31 liters
Cone Mat.	Paper

- Proprietary cone material with natural fibers made in-house
- Light weight foam surround
- Optimized whizzer cone for smooth high frequency extension
- Phase plug for controlled radiation
- Vented spider for controlled radiation



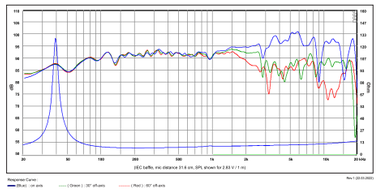

8" SB20FRPC30-8

Impedance	8 Ω
Fs	39.4 Hz
Sensitivity	92 dB
Qts	0.45
Xmax (p-p)	8.2 mm
Vas	66.3 liters
Cone Mat.	Paper

- Proprietary cone material with natural fibers made in-house
- Light weight foam surround
- Optimized whizzer cone for smooth high frequency extension
- Phase plug for controlled radiation
- Large spider for improved linearity



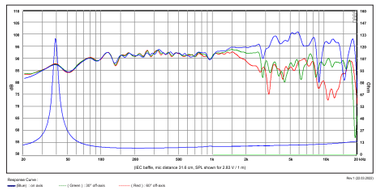

8" SB23MFCL45-4

Impedance	4 Ω
Fs	27 Hz
Sensitivity	87.5 dB
Qts	0.34
Xmas (p-p)	24 mm
Vas	37 liters
Cone Mat.	Polypropylene

- Long stroke design
- very stiff mineral filled polypropylene cone
- Linear high stability suspension
- Non-conducting reinforced fibre glass coil former
- optimized for smaller enclosures



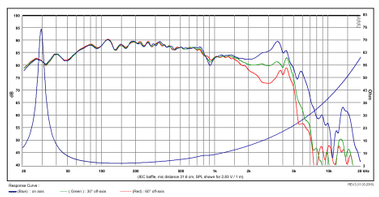

8" SB23MFCL45-8

Impedance	8 Ω
Fs	28.5 Hz
Sensitivity	85 dB
Qts	0.43
Xmax (p-p)	21 mm
Vas	37 liters
Cone Mat.	Polypropylene

- Long stroke design
- very stiff mineral filled polypropylene cone
- Linear high stability suspension
- Non-conducting reinforced fibre glass coil former
- optimized for smaller enclosures



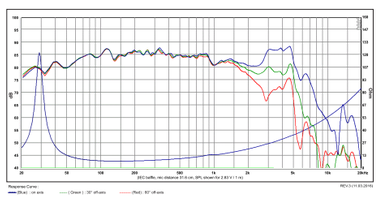

10" SB29SWNRX-S75-6

Impedance	6 Ω
Fs	20 Hz
Sensitivity	86 dB
Qts	0.29
Xmax (p-p)	22 mm
Vas	66 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Hard paper cone for improved piston operation (made in-house)
- Vented pole piece for minimum compression
- 3" copper voice coil (4-layer) for improved power handling
- Non-conducting fibre glass voice coil former for minimum damping



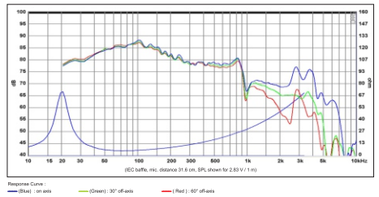

12" SB34SWNRX-S75-6

Impedance	6 Ω
Fs	19 Hz
Sensitivity	88 dB
Qts	0.32
Xmax (p-p)	22 mm
Vas	164 liters
Cone Mat.	Norex

- Vented cast aluminum chassis for optimum strength and low compression
- Hard paper cone for improved piston operation (made in-house)
- Vented pole piece for minimum compression
- 3" copper voice coil (4-layer) for improved power handling
- Non-conducting fibre glass voice coil former for minimum damping



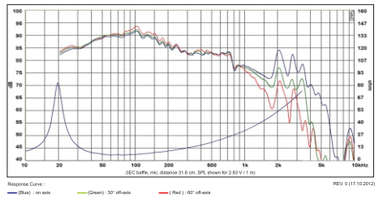

12" SB34SWPL76-4

Impedance	4 Ω
Fs	19 Hz
Sensitivity	85 dB
Qts	0.32
Xmax (p-p)	30 mm
Vas	79 liters
Cone Mat.	Paper

- Long stroke design
- Linear high stability suspension
- Low damping rubber surround
- 3" copper voice coil
- Non-conducting reinforce fibre glass coil former



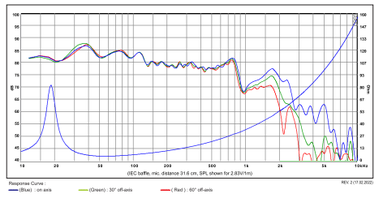

15" SB42FHCL75-6

Impedance	6 Ω
Fs	18.4 Hz
Sensitivity	93 dB
Qts	0.31
Xmax (p-p)	23 mm
Vas	462 liters
Cone Mat.	Honeycomb

- Light weight rigid honeycomb cone (hard paper honeycomb with fiber glass skin layers)
- 3" copper voice coil for improved power handling
- Vented pole piece for minimum compression
- Vented cast aluminum chassis for optimum strength and low compression



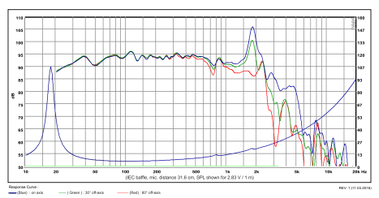

10" SW26SFC38-4

Impedance	4 Ω
Fs	27 Hz
Sensitivity	91.5 dB
Qts	0.29
Xmax (p-p)	7 mm
Vas	88 liters
Cone Mat.	Paper

- Shallow light weight design
- Hard pressed vented paper cone (made in-house)
- Inverted low damping rubber surround
- Symmetric suspension
- Stacked neodymium motor with built-in soft limiting



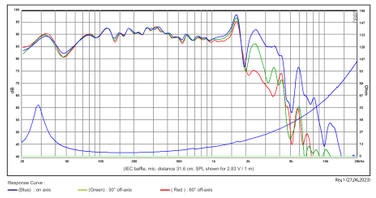

10" SW26SFC38-8

Impedance	8 Ω
Fs	28.5 Hz
Sensitivity	89 dB
Qts	0.35
Xmax (p-p)	7 mm
Vas	80 liters
Cone Mat.	Paper

- Shallow light weight design
- Hard pressed vented paper cone (made in-house)
- Inverted low damping rubber surround
- Symmetric suspension
- Stacked neodymium motor with built-in soft limiting



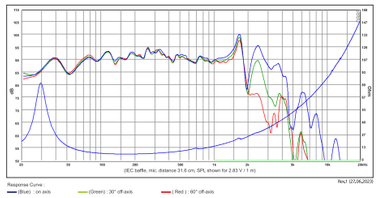

10" SW26DBAC76-4

Impedance	4 Ω
Fs	22 Hz
Sensitivity	86 dB
Qts	0.46
Xmas (p-p)	24 mm
Vas	54 liters
Cone Mat.	Aluminum

- Vented cast aluminum chassis for optimum strength and low compression
- Unique patented long throw shallow design
- Dual rigid aluminum cone structure
- Shorting ring in motor system for reduced distortion
- 3" copper voice coil for improved power handling



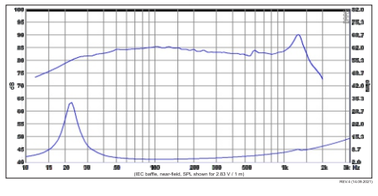

10" SW26DBAC76-8

Impedance	8 Ω
Fs	19.5 Hz
Sensitivity	83 dB
Qts	0.28
Xmax (p-p)	24 mm
Vas	54 liters
Cone Mat.	Aluminum

- Vented cast aluminum chassis for optimum strength and low compression
- Unique patented long throw shallow design
- Dual rigid aluminum cone structure
- Shorting ring in motor system for reduced distortion
- 3" copper voice coil for improved power handling



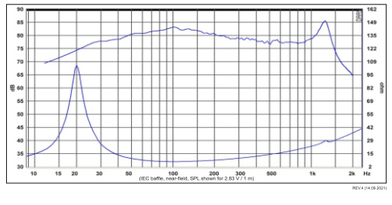

4" SB12PACR-00

Sd	50 cm²
Fs	33 Hz
Cms	1.21 mm/N
Xmech	± 9 mm
Rms	0.32 kg/s
Qms	12.4
Vas	4.3 liters

- Vented reinforced plastic chassis
- Anodised aluminum cone
- Low damping rubber surround
- Long stroke linear suspension
- Easily adjustable moving mass

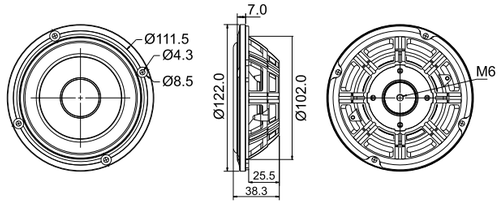

4" SB12PFCR-00

Sd	50 cm²
Fs	34 Hz
Cms	1.2 mm/N
Xmech	± 9 mm
Rms	0.32 kg/s
Qms	12.5
Vas	4.2 liters

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibres made in-house
- Low damping rubber surround
- Long stroke linear suspension
- Easily adjustable moving mass

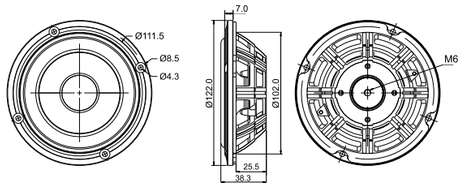

5" SB13PFCR-00

Sd	87 cm²
Fs	23 Hz
Cms	1.33 mm/N
Xmech	± 10 mm
Rms	0.88 kg/s
Qms	5.9
Vas	14.2 liters

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers mad in-house
- Soft low damping surround
- Easily adjustable moving mass
- Symmetric suspension

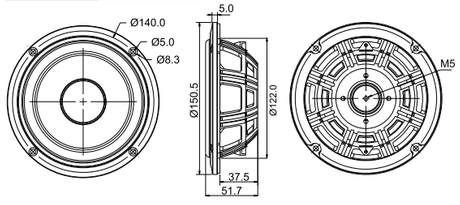

5"x 8" SB15SFCR-00

Sd	178 cm²
Fs	21 Hz
Cms	0.93 mm/N
Xmech	± 11 mm
Rms	0.48 kg/s
Qms	2.7
Vas	41.8 liters

- Racetrack design
- Hard paper cone (made in-house)
- Low damping rubber surround
- Symmetric suspension
- Easily adjustable moving mass

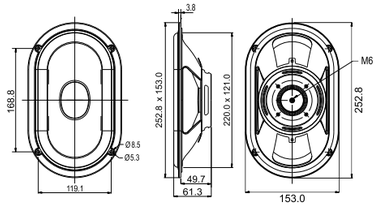

6" SB16PFCR-00

Sd	124 cm²
Fs	22 Hz
Cms	1.4 mm/N
Xmech	± 10 mm
Rms	1.2 kg/s
Qms	4.4
Vas	30 liters

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibres made in-house
- Soft low damping surround
- Easily adjustable moving mass

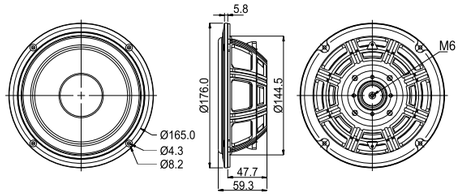

8" SB23MFCL-00

Sd	210 cm²
Fs	19 Hz
Cms	0.5 mm/N
Xmech	± 19 mm
Rms	1.1 kg/s
Qms	15.3
Vas	31.2 liters

- Long stroke design
- Linear high stability suspension
- Low damping rubber surround
- Very stiff mineral filled Polypropylene cone
- Rigid cast aluminum chassis
- Easily adjustable moving mass

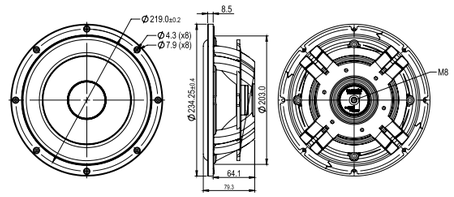

8" SB20PFCR-00

Sd	216 cm²
Fs	20 Hz
Cms	0.83 mm/N
Xmech	± 11 mm
Rms	1.4 kg/s
Qms	6.8
Vas	55 liters

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Soft low damping surround
- Easily adjustable moving mass
- Symmetric suspension

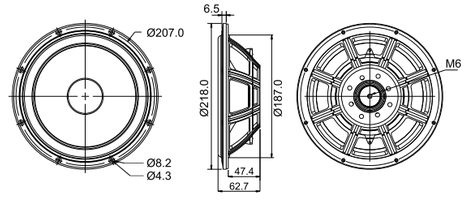

10" SW26DBAC-00

Sd	312 cm²
Fs	13 Hz
Cms	0.39 mm/N
Xmech	± 17 mm
Rms	3.7 kg/s
Qms	8.8
Vas	54 liters

- Dual rigid aluminum cone structure
- Cast aluminum chassis for optimum strength
- Low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass



10" SB29NRX2-00

Sd	312 cm²
Fs	17 Hz
Cms	0.43 mm/N
Xmech	± 17 mm
Rms	3.0 kg/s
Qms	7.3
Vas	60 liters

- Hard paper cone for improved piston operation (made in-house)
- Cast aluminum chassis for optimum strength
- Low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass



10" SB29NRX-00

Sd	312 cm²
Fs	10.2 Hz
Cms	0.48 mm/N
Xmech	± 17 mm
Rms	3.0 kg/s
Qms	10.8
Vas	66 liters

- Hard paper cone for improved piston operation (made in-house)
- Cast aluminum chassis for optimum strength
- Low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass



12" SB34NRX2-00

Sd	506 cm²
Fs	14 Hz
Cms	0.44 mm/N
Xmech	± 17 mm
Rms	3 kg/s
Qms	8.62
Vas	160 liters

- Hard paper cone for improved piston operation (made in-house)
- Cast aluminum chassis for optimum strength
- low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass



12" SB34NRX-00

Sd	508 cm²
Fs	8.7 Hz
Cms	0.5 mm/N
Xmech	± 17 mm
Rms	3 kg/s
Qms	12.1
Vas	183 liters

- Hard paper cone for improved piston operation (made in-house)
- Cast aluminum chassis for optimum strength
- Low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass



DW50

MassFs	50 g
Material	Aluminum



Application:
The DW50 disc weight is used to adjust the moving mass of the SB Acoustics passive radiators. Use an M8 bolt for mounting.

Compatible Drivers:
- 8" SB23MFCL-00
- 10" SB29NRX-00
- 10" SB29NRX2-00
- 10" SW26DAC-00
- 10" SW26DBAC-00
- 12" SB34NRX-00
- 12" SB34NRX2-00

4" SB12PACR25-4-COAX

Woofer:

Impedance	4 Ω
Fs	55 Hz
Sensitivity	87.5 dB
Qts	0.35
Xmax (p-p)	10 mm
Vas	4.3 liters
Cone Mat.	Aluminum

Tweeter:

Impedance	4 Ω
Fs	1300 Hz
Sensitivity	87.5 dB
VC diam.	12.4 mm
Power	10 W
Dome Mat.	Fabric

- Vented reinforced plastic chassis
- Anodised aluminum cone
- Compact large surround dome tweeter
- Large motor system
- Long stroke linear suspension





4" SB12PFCR25-4-COAX

Woofer:

Impedance	4 Ω
Fs	58 Hz
Sensitivity	87 dB
Qts	0.33
Xmax (p-p)	10 mm
Vas	4.8 liters
Cone Mat.	Paper

Tweeter:

Impedance	4 Ω
Fs	1300 Hz
Sensitivity	89 dB
VC diam.	12.4 mm
Power	10 W
Dome Mat.	Fabric

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Compact large surround dome tweeter
- Optimized motor system



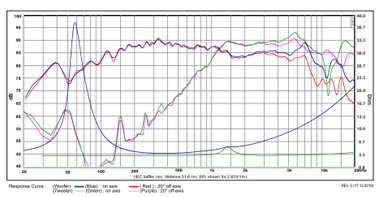

5" SB13PFCR25-4-COAX

Woofer:

Impedance	4 Ω
Fs	43 Hz
Sensitivity	90 dB
Qts	0.27
Xmax (p-p)	9.3 mm
Vas	14.4 liters
Cone Mat.	Paper

Tweeter:

Impedance	4 Ω
Fs	1300 Hz
Sensitivity	89 dB
VC diam.	12.4 mm
Power	10 W
Dome Mat.	Fabric

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Compact large surround dome tweeter
- Optimized motor system



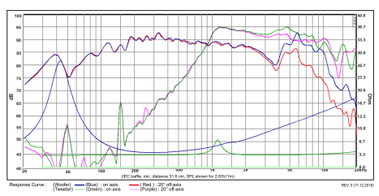

5" SB15BAC30-8-COAX

Woofer:

Impedance	8 Ω
Fs	44 Hz
Sensitivity	86 dB
Qts	0.36
Xmax (p-p)	6.0 mm
Vas	17.2 liters
Cone Mat.	Aluminum

Tweeter:

Impedance	4 Ω
Fs	1100 Hz
Sensitivity	90.3 dB
VC diam.	19.1 mm
Power	40 W
Dome Mat.	Fabric

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Soft dome tweeter with neodymium motor and center cavity
- Excellent high frequency directivity control



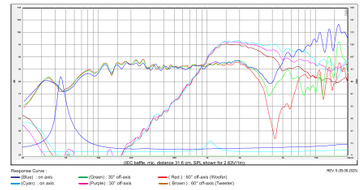

6" SB17BAC35-8-COAX

Woofer:

Impedance	8 Ω
Fs	35.2 Hz
Sensitivity	88 dB
Qts	0.33
Xmax (p-p)	6.2 mm
Vas	33.1 liters
Cone Mat.	Aluminum

Tweeter:

Impedance	4 Ω
Fs	1350 Hz
Sensitivity	93 dB
VC diam.	20.4 mm
Power	30 W
Dome Mat.	Fabric

- Geometrically reinforced aluminum cone for optimum piston operation and reduced break-up
- Soft dome tweeter with neodymium motor, copper cap and read chamber
- Excellent high frequency directivity control



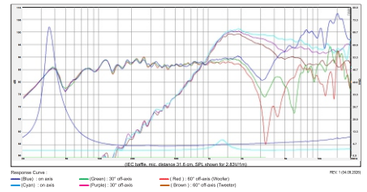

6" SB16PFCR25-4-COAX

Woofer:

Impedance	4 Ω
Fs	36 Hz
Sensitivity	90 dB
Qts	0.31
Xmax (p-p)	9.3 mm
Vas	31.3 liters
Cone Mat.	Paper

Tweeter:

Impedance	4 Ω
Fs	1300 Hz
Sensitivity	89 dB
VC diam.	12.4 mm
Power	10 W
Dome Mat.	Fabric

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Compact large surround dome tweeter
- Optimized motor system



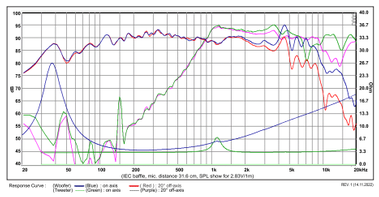

7.5" SATORI MT19CP-8

Woofer:

Impedance	8 Ω
Fs	43 Hz
Sensitivity	90 dB
Qts	0.31
Xmax (p-p)	7.2 mm
Vas	37.1 liters
Cone Mat.	Egyptian Papyrus

Tweeter:

Impedance	4 Ω
Fs	1200 Hz
Sensitivity	90 dB
VC diam.	25.4 mm
Power	60 W
Dome Mat.	Fabric

- Proprietary cone material with Egyptian Papyrus made in-house
- Powerful low distortion neodymium motor system with extended copper sleeve
- Soft dome tweeter with neodymium motor, copper cap and CCAW voice coil



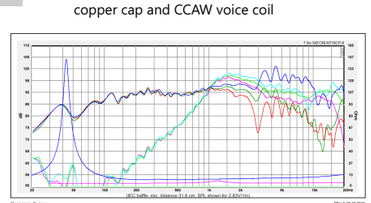

Distributors

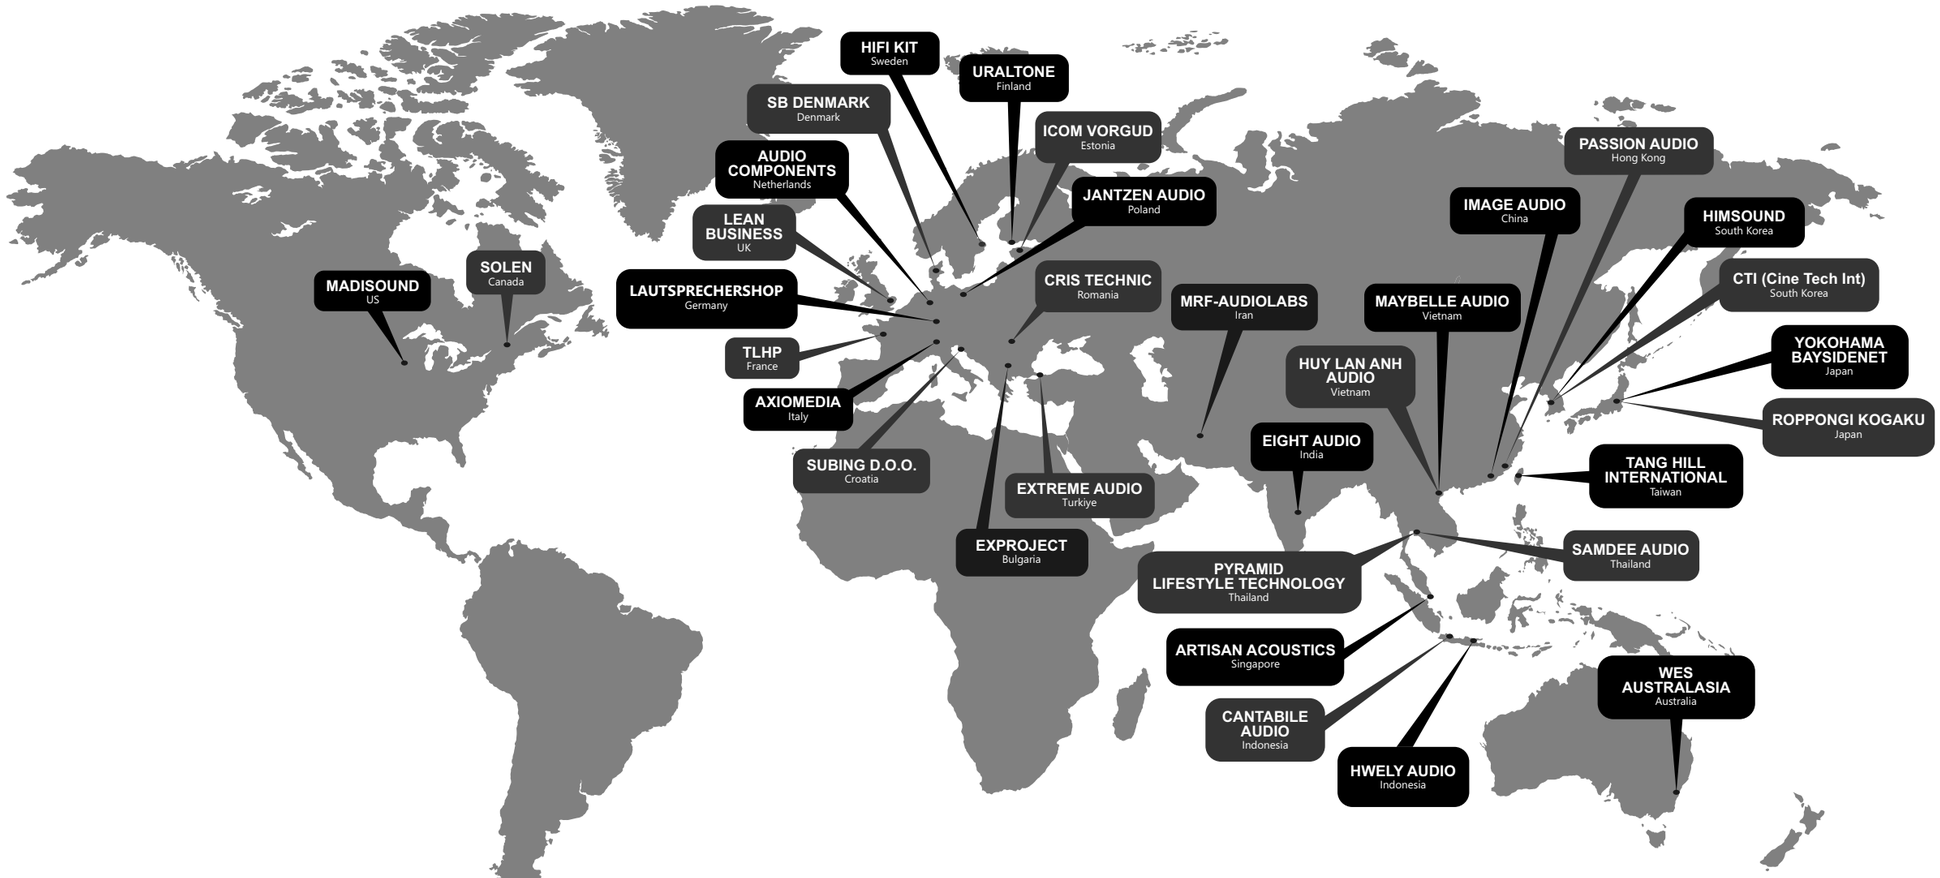

MADISOUND, US - www.madisounspeakerstore.com

SOLEN, Canada - https://solen.ca/en

SB DENMARK, Denmark - https://danesian.dk/

LEAN BUSINESS, United Kingdom - https://www.lean-business.co.uk/eshop/

TLHP, France - https://en.toutlehautparleur.com/

AXIOMEDIA, Italy - https://www.axiomedia.it/en/

SUBING D.O.O., Croatia - https://subing.hr/

HIFI KIT, Sweden - https://www.hifikit.se/

URALTONE, Finland - https://en.uraltone.com/

ICOM VORGUD, Estonia - http://www.icom.ee/en/

JANTZEN AUDIO, Poland - http://www.jantzen-audio.com/

AUDIO COMPONENTS, Netherlands - https://www.audiocomponents.info/

LAUTSPRECHERSHOP, Germany - https://www.lautsprechershop.de

EXPROJECT, Bulgaria - https://www.exproject-bg.com/

EXTREME AUDIO, Turkiye - https://www.extreme-audio.com/

CRIS TECHNIC, Romania - www.cristechnic.ro

MRF-AUDIOLABS, Iran - http://www.mrf-audiolabs.com/

EIGHT AUDIO, India - https://audiofy.in/

WES AUSTRALASIA, Australia - https://www.wes.com.au/

HWELY AUDIO, Indonesia - https://www.hwelyaudio.com/

CANTABILE AUDIO, Indonesia - https://cantabile-by-apostrophe.weebly.com/

ARTISAN ACOUSTICS, Singapore - https://www.artisanacoustics.net/

SAMDEE AUDIO, Thailand - https://www.samdee-audio.com/

PYRAMID LIFESTYLE TECHNOLOGY, Thailand - https://www.pltspeaker.com/

HUY LAN ANH AUDIO, Vietnam - https://huylananhaudio.vn/

MAYBELLE AUDIO, Vietnam - https://www.maybelle.com.vn/

IMAGEAUDIO, China - http://imageaudio.cn/

PASSION AUDIO, Hong Kong - https://www.smartordersystem.com/

YOKOHAMA BAYSIDENET, Japan - https://www.baysidenet.jp/

ROPPONGI KOGAKU Limited, Japan - https://ritlab.jp/azabu/html/

HIMSOUND, South Korea - http://himsound.com/

CTI (Cine Tech Inc), South Korea - http://ctishop.co.kr

TANGHILL INTERNATIONAL, Taiwan - http://www.thlaudio.com/indexE.htm