SB AUDIENCE

because good sound matters

Catalogue

Speaker Drivers

Find us on:

- SB Audience
- sbaudience
- SB Audience
- www.sbaudience.com
- sinarbajaelectric.com

SB AUDIENCE

because good sound matters

SB Audience is spawned from the heavyweight manufacturing of Sinar Baja Electric Indonesia, with well over 45 years of experience in development and manufacturing of solutions for professional OEM drivers, and has serviced well known brands in the PRO audio industry for decades with in-house engineering and manufacturing.

There are three categories within our standard product range: Bianco, achieves good performance at the most reasonable cost. Rosso, aims at high performance at an attractive price, and Nero is our higher performance line still achieving exceptional price performance ratio.

SB ELECTRIC

Sinar Baja Electric is the manufacturing company behind SB Acoustics. Established in 1981 and extensively expanded ever since to become the largest loudspeaker manufacturer in Indonesia. With a population of more than 250 million people, Indonesia is a significant contributor to global manufacturing.

To this day, Sinar Baja Electric is a privately held group of companies in Surabaya, Indonesia. We develop and manufacture our own range of brands that are offered world wide through our distribution supply chain in major markets such as Europe, Australia, Asia and the United States.

We are proud to be the preferred OEM/ODM supplier of many prestigious brands from Lifestyle Hi-Fi, High-End, Automotive to Professional Audio, and much more.

With more than 45 years of history in loudspeaker manufacturing and innovation, we continues to expand in both quality, capacity, as well as services. With in-house Research & Development through the latest technologies as well as extensive experience in quality control and mass production we are confident we can deliver what you are searching for.

COMPRESSION DRIVERS

BIANCO-25CD-P 5
ROSSO-25CDN-P 5
BIANCO-34CD-T 5
BIANCO-34CD-PK 5
ROSSO-34CD-PK 6
ROSSO-34CDN-PK 6
BIANCO-44CD-T 6
BIANCO-44CD-PK 6
BIANCO-44CD-K 7
ROSSO-44CD-PK 7
ROSSO-44CDN-PK 7
ROSSO-65CD-T 7
ROSSO-65CDN-T 8
BIANCO-75CD-T 8
ROSSO-75CDN-T 8

WOOFERS

NERO-5CCN125D 8
NERO-6MRN151D 9
NERO-6MRN150D 9
ROSSO-6C200D 9
ROSSO-6MW150D 9
ROSSO-6MW151D 10
BIANCO-8MW125 10
BIANCO-8MW250 10
NERO-8MWN400D 10
BIANCO-8MWN150 11
BIANCO-10MW150 11
BIANCO-10MW200 11
NERO-10MWN600D 11
BIANCO-12MW200 12
ROSSO-12MW300 12
NERO-12MWN400D 12
NERO-12MWN700D 12
BIANCO-15MW200 13
BIANCO-15W200 13
BIANCO-15MW350 13
BIANCO-15MW500 13
ROSSO-15W400 14
ROSSO-15MW500 14
NERO-15MWN700D 14

SUBWOOFERS

BIANCO-15SW400 14
BIANCO-15SW600 15
ROSSO-15SW800 15
NERO-15SW800 15
BIANCO-18SW450 15
BIANCO-18SW500 16
ROSSO-18SW650 16
ROSSO-18SW750 16
ROSSO-18SW800 16
ROSSO-18SW1000D 17
NERO-18SW1100D 17
NERO-18SW1900D 17
ROSSO-21SW800 17
NERO-21SW1100D 18

OPEN BAFFLE

BIANCO-12OB150-01 18
BIANCO-15OB350 18
NERO-15OBN450D 18
NERO-18OBN500D 19

COAXIALS

ROSSO-8CX250 19
ROSSO-10CX300 19
ROSSO-12CX350 19

HORNS

HORN H225 20
HORN H250 20
HORN H280 20
XHYDE 290 20

DISTRIBUTORS

..... 21

BIANCO-25CD-P

Impedance	8 Ω
Max Power	40 W
Freq. range	1000 - 20000 Hz
Sensitivity	107 dB
VC diam.	25 mm
Diaphragm mat.	Polyetherimide
Magnet	Ferrite
Nominal throat diam.	1 inch

- Extremely light weight PEI diaphragm
- Smooth response with airy detailed highs
- High sensitivity and compact design



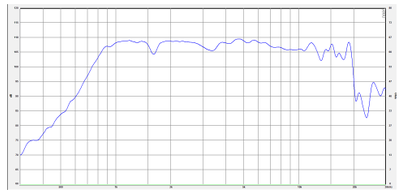

ROSSO-25CDN-P

Impedance	8 Ω
Max Power	50 W
Freq. range	1000 - 20000 Hz
Sensitivity	107 dB
VC diam.	25 mm
Diaphragm mat.	Polyetherimide
Magnet	Neodymium
Nominal throat diam.	1 inch

- Smooth response with airy detailed yet warm character
- High sensitivity and very compact design
- Neodymium motor assembly
- Screw on or bolt on with included aluminum adaptor
- Advanced voice coil with copper clad aluminum wire



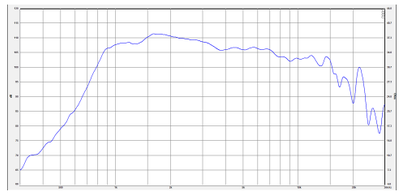

BIANCO-34CD-T

Impedance	8 Ω
Max Power	60 W
Freq. range	700 - 20000 Hz
Sensitivity	105 dB
VC diam.	34 mm
Diaphragm mat.	Titanium
Magnet	Ferrite
Nominal throat diam.	1 inch

- Titanium diaphragm
- Extended upper frequency response
- Detailed and dynamic
- Advanced voice coil with Flat Copper Clad Aluminum Wire

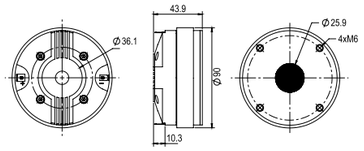

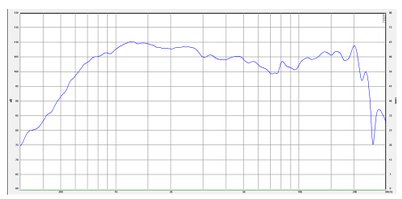

BIANCO-34CD-PK

Impedance	8 Ω
Max Power	60 W
Freq. range	1000 - 20000 Hz
Sensitivity	105 dB
VC diam.	34 mm
Diaphragm mat.	PEEK
Magnet	Ferrite
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Extended upper frequency response
- Smooth yet detailed and dynamic
- Advanced voice coil with flat copper clad aluminum wire

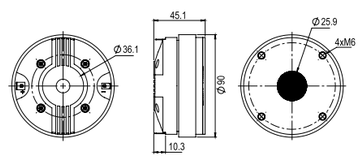

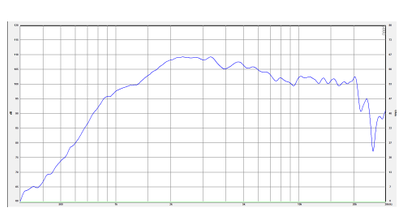

ROSSO-34CD-PK

Impedance	8 Ω
Max Power	60 W
Freq. range	1000 - 20000 Hz
Sensitivity	105 dB
VC diam.	34 mm
Diaphragm mat.	PEEK
Magnet	Ferrite
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Optimized cast aluminum rear chamber with damping
- Wide useful bandwidth
- Smooth frequency and impedance response
- Advanced voice coil with flat copper clad aluminum wire



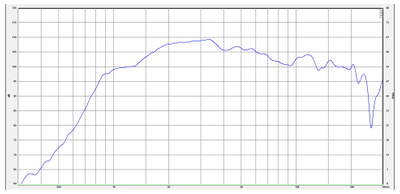

ROSSO-34CDN-PK

Impedance	8 Ω
Max Power	60 W
Freq. range	1000 - 20000 Hz
Sensitivity	106 dB
VC diam.	34 mm
Diaphragm mat.	PEEK
Magnet	Neodymium
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Neodymium motor assembly
- Advanced voice coil with flat copper clad aluminum wire
- Smooth frequency and impedance response
- Screw on or bolt on with included adaptor

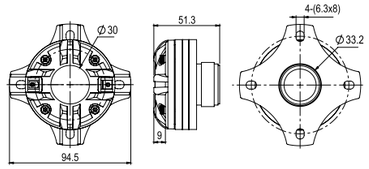

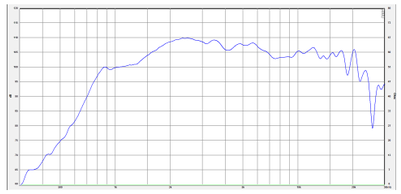

BIANCO-44CD-T

Impedance	8 Ω
Max Power	100 W
Freq. range	700 - 20000 Hz
Sensitivity	105 dB
VC diam.	44 mm
Diaphragm mat.	Titanium
Magnet	Ferrite
Nominal throat diam.	1 inch

- Titanium diaphragm
- Detailed and dynamic
- High SPL
- Advanced voice coil with flat copper clad aluminum wire
- Push terminal for easy installation



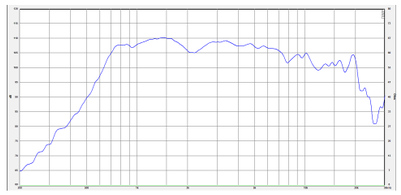

BIANCO-44CD-PK

Impedance	8 Ω
Max Power	100 W
Freq. range	700 - 20000 Hz
Sensitivity	107 dB
VC diam.	44 mm
Diaphragm mat.	PEEK
Magnet	Ferrite
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Excellent frequency response
- Extended upper frequency response
- Smooth yet detailed and dynamic character
- Advanced voice coil with flat copper clad aluminum wire

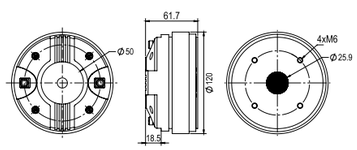

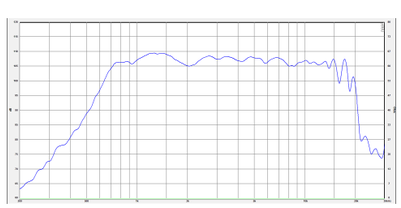

BIANCO-44CD-K

Impedance	8 Ω
Max Power	100 W
Freq. range	700 - 20000 Hz
Sensitivity	108 dB
VC diam.	44 mm
Diaphragm mat.	Kapton
Magnet	Ferrite
Nominal throat diam.	1 inch

- Kapton diaphragm
- Detailed and smooth character
- high SPL
- Extremely light weight diaphragm
- Push terminal for easy installation

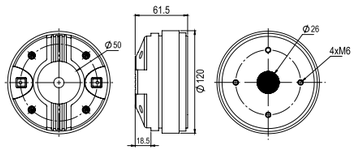

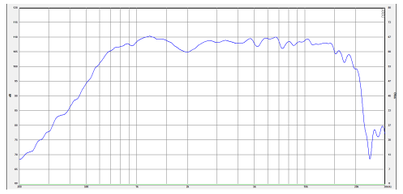

ROSSO-44CD-PK

Impedance	8 Ω
Max Power	120 W
Freq. range	700 - 20000 Hz
Sensitivity	107 dB
VC diam.	44.3 mm
Diaphragm mat.	PEEK
Magnet	Ferrite
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Optimized cast aluminum rear chamber with damping
- Wide useful bandwidth
- Smooth frequency and impedance response
- Advanced voice coil with flat copper clad aluminum wire

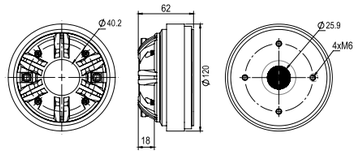

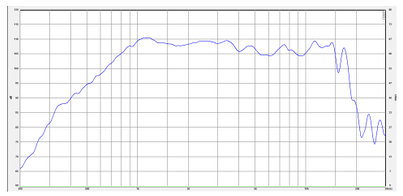

ROSSO-44CDN-PK

Impedance	8 Ω
Max Power	120 W
Freq. range	700 - 20000 Hz
Sensitivity	109 dB
VC diam.	44.3 mm
Diaphragm mat.	PEEK
Magnet	Neodymium
Nominal throat diam.	1 inch

- Polyether Ether Ketone (PEEK) diaphragm
- Neodymium motor assembly
- High sensitivity
- Advanced voice coil with flat copper clad aluminum wire
- Smooth frequency and impedance response



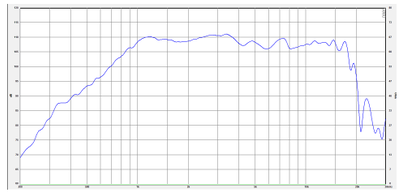

ROSSO-65CD-T

Impedance	8 Ω
Max Power	140 W
Freq. range	500 - 20000 Hz
Sensitivity	108 dB
VC diam.	65 mm
Diaphragm mat.	Titanium
Magnet	Ferrite
Nominal throat diam.	1.4 inch

- Titanium diaphragm
- Copper cap for reduced distortion and extended HF response
- Extended upper frequency response
- High sensitivity and linear frequency response
- Advanced voice coil with flat copper clad aluminum wire

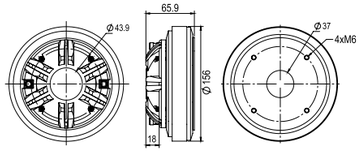

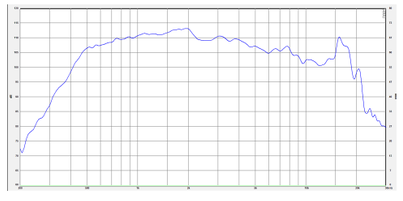

ROSSO-65CDN-T

Impedance	8 Ω
Max Power	140 W
Freq. range	500 - 20000 Hz
Sensitivity	109 dB
VC diam.	65 mm
Diaphragm mat.	Titanium
Magnet	Neodymium
Nominal throat diam.	1.4 inch

- Titanium diaphragm
- Neodymium motor assembly
- Copper cap for reduced distortion and extended HF response
- Advanced voice coil with flat copper clad aluminum wire
- High sensitivity and linear frequency response

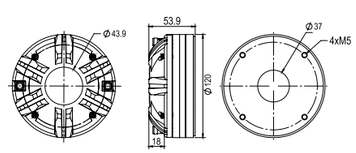

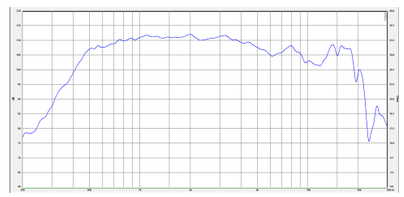

BIANCO-75CD-T

Impedance	8 Ω
Max Power	200 W
Freq. range	500 - 20000 Hz
Sensitivity	109 dB
VC diam.	75 mm
Diaphragm mat.	Titanium
Magnet	Ferrite
Nominal throat diam.	1.4 inch

- Titanium composite diaphragm with PEEK surround
- Extended lower frequency range
- High SPL and power handling
- Black kapton VC former for improved power handling
- Voice coil from light weight flat aluminum winding material

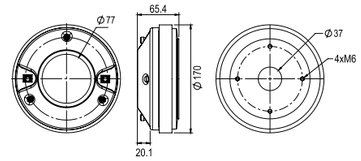

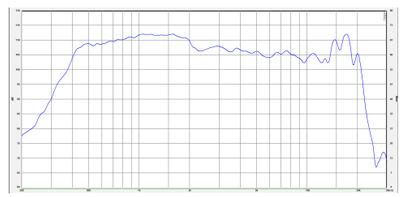

ROSSO-75CDN-T

Impedance	8 Ω
Max Power	220 W
Freq. range	500 - 22000 Hz
Sensitivity	110 dB
VC diam.	75 mm
Diaphragm mat.	Titanium
Magnet	Neodymium
Nominal throat diam.	1.4 inch

- Titanium diaphragm
- Neodymium motor assembly
- Copper cap for minimum intermodulation distortion
- Smooth yet detailed and dynamic character
- High sensitivity and linear frequency response

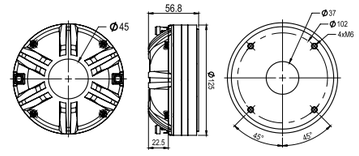

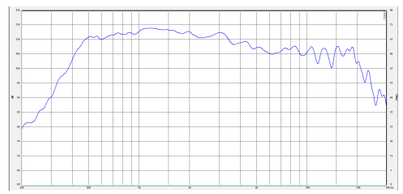

NERO-5CCN125D

Impedance	8 Ω
Max Power	30 W
Fs	360 Hz* / 122 Hz**
Sensitivity	99 dB* / 97 dB**
Qts	0.73* / 0.28*
Xmax	3.2 mm
Mms	7.9 g
VC diameter	38.5 mm

** with chamber*
*** no chamber*

- Pure carbon fiber cone
- Inverted low mass surround
- High grade neodymium magnet
- Removable cast aluminum rear chamber
- Suitable for high compression midrange applications

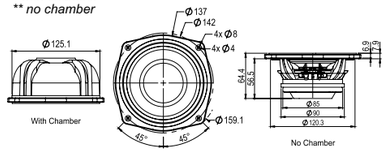

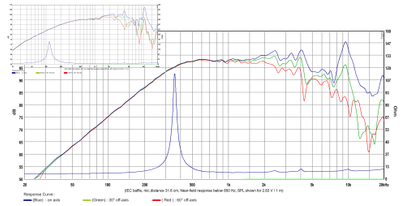

NERO-6MRN151D

Impedance	8 Ω
Max Power	360 W
Fs	230 Hz
Sensitivity	98 dB
Qts	0.48
Xmax	3.43 mm
Mms	14.6 g
VC diameter	49.5 mm

- Proprietary cone paper material with graphite
- High grade neodymium magnet
- Shorting ring in motor system for reduced distortion
- Flat foam surround for best midrange reproduction
- Minimum damping fiber glass voice coil former





NERO-6MRN150D

Impedance	8 Ω
Max Power	300 W
Fs	200 Hz
Sensitivity	98 dB
Qts	0.48
Xmax	3.43 mm
Mms	13.8 g
VC diameter	49.5 mm

- Proprietary cone paper material with graphite
- High grade neodymium magnet
- Shorting ring in motor system for reduced distortion
- Flat foam surround for best midrange reproduction
- Minimum damping fiber glass voice coil former



ROSSO-6C200D

Impedance	8 Ω
Max Power	400 W
Fs	61 Hz
Sensitivity	93 dB
Qts	0.34
Xmax	5.24 mm
Mms	23 g
VC diameter	49.5 mm

- Pure carbon fiber cone made in house
- Extended midrange performance
- Minimum damping fiber glass voice coil former
- Shorting ring in motor system for reduced distortion
- Proprietary cone coating for controlled breakup (rear side)





ROSSO-6MW151D

Impedance	8 Ω
Max Power	300 W
Fs	66 Hz
Sensitivity	94 dB
Qts	0.32
Xmax	5.24 mm
Mms	19.4 g
VC diameter	49.5 mm

- Proprietary cone paper material with manila pulp and graphite
- Proprietary cone coating for controlled breakup
- Extended midrange performance
- Shorting ring in motor system for reduced distortion
- Minimum damping fiber glass voice coil former





ROSSO-6MW150D

Impedance	8 Ω
Max Power	300 W
Fs	66 Hz
Sensitivity	94 dB
Qts	0.32
Xmax	5.24 mm
Mms	19.4 g
VC diameter	49.5 mm

- Proprietary cone paper material with manila pulp and graphene
- Proprietary cone coating for controlled breakup
- Extended midrange performance
- Shorting ring in motor system for reduced distortion
- Minimum damping fiber glass voice coil former





BIANCO-8MW125

Impedance	8 Ω
Max Power	250 W
Fs	89 Hz
Sensitivity	97 dB
Qts	0.55
Xmax	6.42 mm
Mms	22.8 g
VC diameter	49.5 mm

- Proprietary cone paper material made in-house
- 2" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- CCAW voice coil wire for reduced moving mass
- Minimum damping fiber glass voice coil former





BIANCO-8MW250

Impedance	8 Ω
Max Power	500 W
Fs	74 Hz
Sensitivity	94 dB
Qts	0.4
Xmax	6.5 mm
Mms	20.97 g
VC diameter	49.5 mm

- Smooth response and excellent bass
- Vented pole piece for reduced compression
- CCAW voice coil wire for reduced moving mass
- Minimum damping fiber glass voice coil former
- 2" voice coil with APC (Advanced Polymer Coating)





NERO-8MWN400D

Impedance	8 Ω
Max Power	800 W
Fs	63 Hz
Sensitivity	93.5 dB
Qts	0.38
Xmax	6.7 mm
Mms	28.4 g
VC diameter	60.6 mm

- Strong neodymium motor
- Copper sleeve for low inductance and reduced distortion
- Bifilar 4 layer Voice coil for higher BL and reduced mass
- 2.4" copper clad aluminum voice coil with APC (Advanced Polymer Coating)





BIANCO-8MWN150

Impedance	8 Ω
Max Power	300 W
Fs	74 Hz
Sensitivity	93 dB
Qts	0.38
Xmax	5.98 mm
Mms	34 g
VC diameter	60.5 mm

- Proprietary cone paper material made in-house
- 2.4" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- CCAW voice coil wire for reduced moving mass
- Minimum damping fiber glass voice coil former





BIANCO-10MW150

Impedance	8 Ω
Max Power	300 W
Fs	65 Hz
Sensitivity	100 dB
Qts	0.39
Xmax	5.63 mm
Mms	44.4 g
VC diameter	60.5 mm

- Proprietary cone paper material with linter pulp
- 2.4" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- minimum damping fiber glass voice coil former
- Weather-proof coated cone paper





BIANCO-10MW200

Impedance	8 Ω
Max Power	500 W
Fs	56 Hz
Sensitivity	98 dB
Qts	0.36
Xmax	6.7 mm
Mms	38 g
VC diameter	60.5 mm

- Proprietary cone paper material with linter pulp
- 2.4" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- minimum damping fiber glass voice coil former
- Weather-proof coated cone paper





NERO-10MWN600D

Impedance	8 Ω
Max Power	1200 W
Fs	68.1 Hz
Sensitivity	96 dB
Qts	0.34
Xmax	7.3 mm
Mms	52.2 g
VC diameter	75.6 mm

- Proprietary cone paper material with manila pulp
- Strong neodymium motor
- 3" voice coil with APC (Advanced Polymer Coating)
- Copper sleeve for low inductance and reduced distortion
- Interleaved Sandwich Voice Coil technology





BIANCO-12MW200

Impedance	8 Ω
Max Power	400 W
Fs	51 Hz
Sensitivity	99 dB
Qts	0.49
Xmax	6.97 mm
Mms	65.2 g
VC diameter	60.5 mm

- Proprietary cone paper material with silk cotton tree and manila pulp
- 2.4" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- Minimum damping fiber glass voice coil former
- Long life silver lead wires





ROSSO-12MW300

Impedance	8 Ω
Max Power	600 W
Fs	48 Hz
Sensitivity	100 dB
Qts	0.27
Xmax	6.68 mm
Mms	54.3 g
VC diameter	75.6 mm

- Proprietary cone paper material with silk cotton tree
- 3" interleaved sandwich voice coil
- Cast aluminum chassis
- minimum damping fiber glass
- CCAW voice coil for reduced moving mass



NERO-12MWN400D

Impedance	8 Ω
Max Power	800 W
Fs	66 Hz
Sensitivity	96 dB
Qts	0.52
Xmax	7.13 mm
Mms	78.8 g
VC diameter	75.6 mm

- Proprietary cone paper material with manila pulp
- Strong neodymium motor
- 3" voice coil with APC (Advanced Polymer Coating)
- Interleaved sandwich voice coil technology
- Copper Sleeve for low inductance and reduced distortion



NERO-12MWN700D

Impedance	8 Ω
Max Power	1400 W
Fs	52.7 Hz
Sensitivity	97 dB
Qts	0.38
Xmax	7.3 mm
Mms	72.5 g
VC diameter	75.6 mm

- Proprietary cone paper material with manila pulp
- Strong neodymium motor
- 3" voice coil with APC (Advanced Polymer Coating)
- Interleaved Sandwich Voice Coil technology
- Copper sleeve for low inductance and reduced distortion





BIANCO-15MW200

Impedance	8 Ω
Max Power	400 W
Fs	44 Hz
Sensitivity	100 dB
Qts	0.58
Xmax	5.92 mm
Mms	80.9 g
VC diameter	60.5 mm

- Proprietary cone paper material made in-house
- Vented pole piece for reduced compression
- Corrugation cone paper for improved durability
- Minimum damping fiber glass voice coil former
- 2.4" voice coil





BIANCO-15W200

Impedance	8 Ω
Max Power	600 W
Fs	47 Hz
Sensitivity	100 dB
Qts	0.54
Xmax	8.53 mm
Mms	107.1 g
VC diameter	75.5 mm

- Proprietary cone paper material with silk cotton tree and manila pulp
- 3" voice coil with APC (Advanced Polymer Coating)
- Minimum damping fiber glass voice coil former
- Vented pole piece for reduced compression





BIANCO-15MW350

Impedance	8 Ω
Max Power	700 W
Fs	39 Hz
Sensitivity	100 dB
Qts	0.48
Xmax	7.42 mm
Mms	108.7 g
VC diameter	65.5 mm

- Proprietary cone paper material made in-house
- Minimum damping fiber glass voice coil former
- 2.5" voice coil
- Long life silver lead wires
- Vented pole piece for reduced compression





BIANCO-15MW500

Impedance	8 Ω
Max Power	700 W
Fs	39 Hz
Sensitivity	100 dB
Qts	0.48
Xmax	7.42 mm
Mms	108.7 g
VC diameter	65.5 mm

- Smooth response with excellent midrange
- Vented pole piece for reduced compression
- 3" voice coil with APC (Advanced Polymer Coating)
- Weather-proof coated paper cone made in house with silk cotton tree and manila pulp





ROSSO-15W400

Impedance	8 Ω
Max Power	800 W
Fs	44 Hz
Sensitivity	102 dB
Qts	0.33
Xmax	8.26 mm
Mms	107.6 g
VC diameter	75.5 mm

- Proprietary cone paper material with silk cotton tree
- Minimum damping fiber glass voice coil former
- 3" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Cast aluminum chassis





ROSSO-15MW500

Impedance	8 Ω
Max Power	1000 W
Fs	42 Hz
Sensitivity	100 dB
Qts	0.33
Xmax	8.38 mm
Mms	127.1 g
VC diameter	99.2 mm

- Proprietary cone paper material with silk cotton tree
- minimum damping fiber glass voice coil former
- 4" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Triple roll surround for extended excursion





NERO-15MWN700D

Impedance	8 Ω
Max Power	1400 W
Fs	41.4 Hz
Sensitivity	97 dB
Qts	0.46
Xmax	7.3 mm
Mms	107.6 g
VC diameter	75.6 mm

- Proprietary cone paper material with manila pulp
- Strong neodymium motor
- 3" voice coil with APC (Advanced Polymer Coating)
- Interleaved Sandwich Voice Coil technology
- Copper sleeve for low inductance and reduced distortion





BIANCO-15SW400

Impedance	8 Ω
Max Power	800 W
Fs	41 Hz
Sensitivity	99 dB
Qts	0.48
Xmax	9.2 mm
Mms	134.1 g
VC diameter	99.2 mm

- Proprietary cone paper material with silk cotton tree
- 4" voice coil with APC (Advanced Polymer Coating)
- Corrugation cone paper for improved durability
- Minimum damping fiber glass voice coil former
- Vented pole piece for reduced compression





BIANCO-15SW600

Impedance	8 Ω
Max Power	1200 W
Fs	35 Hz
Sensitivity	96 dB
Qts	0.38
Xmax	11 mm
Mms	138 g
VC diameter	99.2 mm

- Proprietary cone paper pulp with silk cotton
- Minimum damping fiber glass voice coil former
- 4" voice coil with APC (Advanced Polymer Coating)
- Corrugated cone for improved durability
- Vented pole piece for reduced compression





ROSSO-15SW800

Impedance	8 Ω
Max Power	1600 W
Fs	45 Hz
Sensitivity	99 dB
Qts	0.46
Xmax	11.28 mm
Mms	143.6 g
VC diameter	99.2 mm

- Proprietary cone paper material made in-house
- Minimum damping fiber glass voice coil former
- 4" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Vented pole piece for reduced compression





NERO-15SW800

Impedance	8 Ω
Max Power	1600 W
Fs	31 Hz
Sensitivity	96 dB
Qts	0.34
Xmax	14.27 mm
Mms	207.2 g
VC diameter	113 mm

- Proprietary cone paper material with silk cotton tree and manila pulp
- 4.5" voice coil with APC (Advanced Polymer Coating)
- Double spider for high stability suspension
- Cooling device on head yoke for increased heat transfer





BIANCO-18SW450

Impedance	8 Ω
Max Power	900 W
Fs	28 Hz
Sensitivity	99 dB
Qts	0.45
Xmax	10.93 mm
Mms	190.3 g
VC diameter	75.5 mm

- Proprietary cone paper material with silk cotton tree
- 3" voice coil with APC (Advanced Polymer Coating)
- Minimum damping fiber glass voice coil former
- Vented pole piece for reduce compression
- Triple roll surround allows long excursion





BIANCO-18SW500

Impedance	8 Ω
Max Power	1000 W
Fs	30 Hz
Sensitivity	98 dB
Qts	0.52
Xmax	9.21 mm
Mms	195.2 g
VC diameter	99.2 mm

- Proprietary cone paper material with silk cotton tree
- Minimum damping fiber glass voice coil former
- 4" voice coil with APC (Advanced Polymer Coating)
- Vented pole piece for reduced compression
- Weather-proof coated cone paper





ROSSO-18SW650

Impedance	8 Ω
Max Power	1300 W
Fs	31 Hz
Sensitivity	99 dB
Qts	0.41
Xmax	11.81 mm
Mms	189.7 g
VC diameter	99.2 mm

- Proprietary cone paper material with silk cotton tree
- 4" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Vented pole piece for reduced compression
- Triple roll surround for extended excursion





ROSSO-18SW750

Impedance	8 Ω
Max Power	1500 W
Fs	36 Hz
Sensitivity	99 dB
Qts	0.43
Xmax	8.82 mm
Mms	212.4 g
VC diameter	113 mm

- Proprietary cone paper material with silk cotton tree
- Minimum damping fiber glass voice coil former
- 4.5" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Vented pole piece fore reduced compression





ROSSO-18SW800

Impedance	8 Ω
Max Power	1600 W
Fs	33 Hz
Sensitivity	99 dB
Qts	0.46
Xmax	11.33 mm
Mms	200.6 g
VC diameter	99.2 mm

- Proprietary cone paper material with silk cotton tree
- 4" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Vented pole piece for reduced compression
- Cooling device on yoke for increased heat transfer





ROSSO-18SW1000D

Impedance	8 Ω
Max Power	2000 W
Fs	35 Hz
Sensitivity	98 dB
Qts	0.46
Xmax	13.67 mm
Mms	276 g
VC diameter	113 mm

- Proprietary cone paper material with silk cotton tree
- Double spider for high stability suspension
- Shorting ring in motor system for reduced distortion
- Cooling device on yoke for improved heat transfer
- AISVW voice coil wire for high power handling





NERO-18SW1100D

Impedance	8 Ω
Max Power	2200 W
Fs	36 Hz
Sensitivity	99 dB
Qts	0.33
Xmax	12.20 mm
Mms	294 g
VC diameter	127 mm

- Proprietary cone paper material with silk cotton tree
- Double spider high stability suspension
- Cooling device on yoke for improved heat transfer
- 5" voice coil with APC (Advanced Polymer Coating)
- Shorting ring in motor system for reduced distortion





NERO-18SW1900D

Impedance	8 Ω
Max Power	3800 W
Fs	34 Hz
Sensitivity	95 dB
Qts	0.42
Xmax	17.5 mm
Mms	307.6 g
VC diameter	113 mm

- Large 4.5" interleaved sandwich voice coil technology
- Low distortion double magnet motor
- Shorting ring in motor system for reduced distortion
- Cooling device on yoke for increased heat transfer
- Long linear excursion 17.5 mm one way





ROSSO-21SW800

Impedance	8 Ω
Max Power	1600 W
Fs	38 Hz
Sensitivity	98 dB
Qts	0.76
Xmax	11.42 mm
Mms	301.4 g
VC diameter	113 mm

- minimum damping fiber glass voice coil former
- 4.5" voice coil with APC (Advanced Polymer Coating)
- Ribbon voice coil wire for high efficiency
- Cast aluminum chassis
- Vented pole piece for reduced compression





NERO-21SW1100D

Impedance	8 Ω
Max Power	2200 W
Fs	32 Hz
Sensitivity	101 dB
Qts	0.34
Xmax	12.20 mm
Mms	309.3 g
VC diameter	127 mm

- Proprietary cone paper material with silk cotton tree
- 5" voice coil with APC (Advanced Polymer Coating)
- Cooling device on yoke for improved heat transfer
- Shorting ring in motor system for reduced distortion
- Double spider high stability suspension





BIANCO-12OB150-01

Impedance	8 Ω
Max Power	300 W
Fs	44 Hz
Sensitivity	96 dB
Qts	0.63
Xmax	6.79 mm
Mms	52.4 g
VC diameter	60.5 mm

- Designed for open baffle applications
- Proprietary cone paper material with silk cotton tree and manila pulp
- Weather-proof coated cone paper
- Vented pole piece for reduced compression
- Minimum damping fiber glass voice coil former





BIANCO-15OB350

Impedance	8 Ω
Max Power	700 W
Fs	34 Hz
Sensitivity	98 dB
Qts	0.57
Xmax	11.02 mm
Mms	106.48 g
VC diameter	65.5 mm

- Designer for open baffle applications
- Proprietary cone paper material made in-house
- Weather-proof coated cone paper
- Vented pole piece for reduced compression
- Minimum damping fiber glass voice coil former





NERO-15OBN450D

Impedance	8 Ω
Max Power	900 W
Fs	25 Hz
Sensitivity	91 dB
Qts	0.8
Xmax	16 mm
Mms	130 g
VC diameter	99.2 mm

- Designed for oped baffle applications
- Open Yoke Vent (OYV) for ultra low compression and noise
- Large flared and vented pole piece for reduced compression
- Extended copper sleeve for low inductance and intermodulation distortion





NERO-18OBN500D

Impedance	8 Ω
Max Power	1000 W
Fs	22 Hz
Sensitivity	92 dB
Qts	0.9
Xmax	16 mm
Mms	177 g
VC diameter	99.2 mm

- Designed for oped baffle applications
- Open Yoke Vent (OYV) for ultra low compression and noise
- Large flared and vented pole piece for reduced compression
- Extended copper sleeve for low inductance and intermodulation distortion





ROSSO-8CX250

Impedance (LF/HF)	8 Ω / 8 Ω
Max Power (LF/HF)	500 W / 100 W
Fs	70 Hz
Sensitivity (LF/HF)	94 dB / 102 dB
Frequency Range (LF/HF)	70-9200 Hz / 1100-19400 Hz
Qts	0.32
Xmax	5.4 mm
Mms	20.8 g
VC diameter (LF/HF)	49.5 mm / 44.3 mm

- Integrated high precision machined HF horn
- Cast aluminum chassis and HF rear chamber
- Common HF/LF ferrite magnet motor structure
- Minimum damping fiber glass voice coil former
- Ribbon voice coil wire for high efficiency of HF section





ROSSO-10CX300

Impedance (LF/HF)	8 Ω / 8 Ω
Max Power (LF/HF)	600 W / 100 W
Fs	58 Hz
Sensitivity (LF/HF)	95 dB / 105 dB
Frequency Range (LF/HF)	58-7300 Hz / 1500-20000 Hz
Qts	0.45
Xmax	8.2 mm
Mms	34.9 g
VC diameter (LF/HF)	60.6 mm / 44.3 mm

- Cast aluminum chassis and HF rear chamber
- Integrated high precision machined HF horn
- Common HF/LF ferrite magnet motor structure
- Minimum damping fiber glass voice coil former
- Ribbon voice coil wire for high efficiency of HF section





ROSSO-12CX350

Impedance (LF/HF)	8 Ω / 8 Ω
Max Power (LF/HF)	700 W / 100 W
Fs	49 Hz
Sensitivity (LF/HF)	96 dB / 102 dB
Frequency Range (LF/HF)	49-6300 Hz / 1500-20000 Hz
Qts	0.49
Xmax	8.2 mm
Mms	47.5 g
VC diameter (LF/HF)	60.6 mm / 44.3 mm

- Cast aluminum chassis and HF rear chamber
- Integrated high precision machined HF horn
- Common HF/LF ferrite magnet motor structure
- Minimum damping fiber glass voice coil former
- Ribbon voice coil wire for high efficiency of HF section

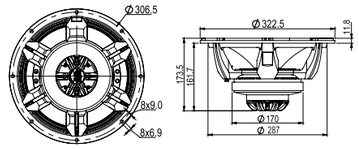



HORN H225

Nominal coverage:	
- Horizontal	90°
- Vertical	70°
Directivity:	
- Directivity factor (Q)	8
- Directivity index (Di)	9 dB
Sensitivity:	
- On driver. 1W@1m, on axis[1]	109 dB
Frequency response @-10dB[2]	600 Hz - 20kHz
Throat diameter	25.4 mm (1 inch)
Minimum recommended crossover[3]	700 Hz
Mechanical connection of driver	Bolt on
Baffle cutout dimensions (front mount):	
- Horizontal	184.5 mm
- Vertical	181 mm

- 1" Throat entry
- 90° x 70°
- Excellent loading down to 600 Hz
- Constant directivity







HORN H250

Nominal coverage:	
- Horizontal	90°
- Vertical	60°
Directivity:	
- Directivity factor (Q)	9
- Directivity index (Di)	9.5 dB
Sensitivity:	
- On driver. 1W@1m, on axis[1]	106 dB
Frequency response @-10dB[2]	600 Hz - 20kHz
Throat diameter	25.4 mm (1.4")
Minimum recommended crossover[3]	700 Hz
Mechanical connection of driver	Bolt on
Baffle cutout dimensions (front mount):	
- Horizontal	215 mm
- Vertical	215 mm

- 1" Throat entry
- 90° x 60°
- Excellent loading down to 600 Hz
- Constant directivity





HORN H280

Nominal coverage:	
- Horizontal	70°
- Vertical	50°
Directivity:	
- Directivity factor (Q)	13
- Directivity index (Di)	11 dB
Sensitivity:	
- On driver. 1W@1m, on axis[1]	108 dB
Frequency response @-10dB[2]	500 Hz - 20kHz
Throat diameter	35.5 mm (1.4")
Minimum recommended crossover[3]	600 Hz
Mechanical connection of driver	Bolt on
Baffle cutout dimensions (front mount):	
- Horizontal	243 mm
- Vertical	239 mm

- 1.4" Throat entry
- 70° x 50°
- Excellent loading down to 500 Hz
- Constant directivity





XHYDE 290

Nominal coverage:	70°
Directivity:	
- Directivity factor (Q)	11
- Directivity index (Di)	10 dB
Sensitivity:	
- On driver. 1W@1m, on axis[1]	112 dB
Frequency response @-10dB[2]	700 Hz - 20kHz
Throat diameter	35.6 mm (1.4")
Minimum recommended crossover[3]	1000 Hz
Mechanical connection of driver	Bolt on
Baffle cutout diameter:	258 mm (10.16 inch)

- Rigid cast aluminum horn
- Extended / flared hyperbolic decline profile
- Smooth response and directivity control
- Excellent transient behaviour
- Removable mounting flange



Distributors

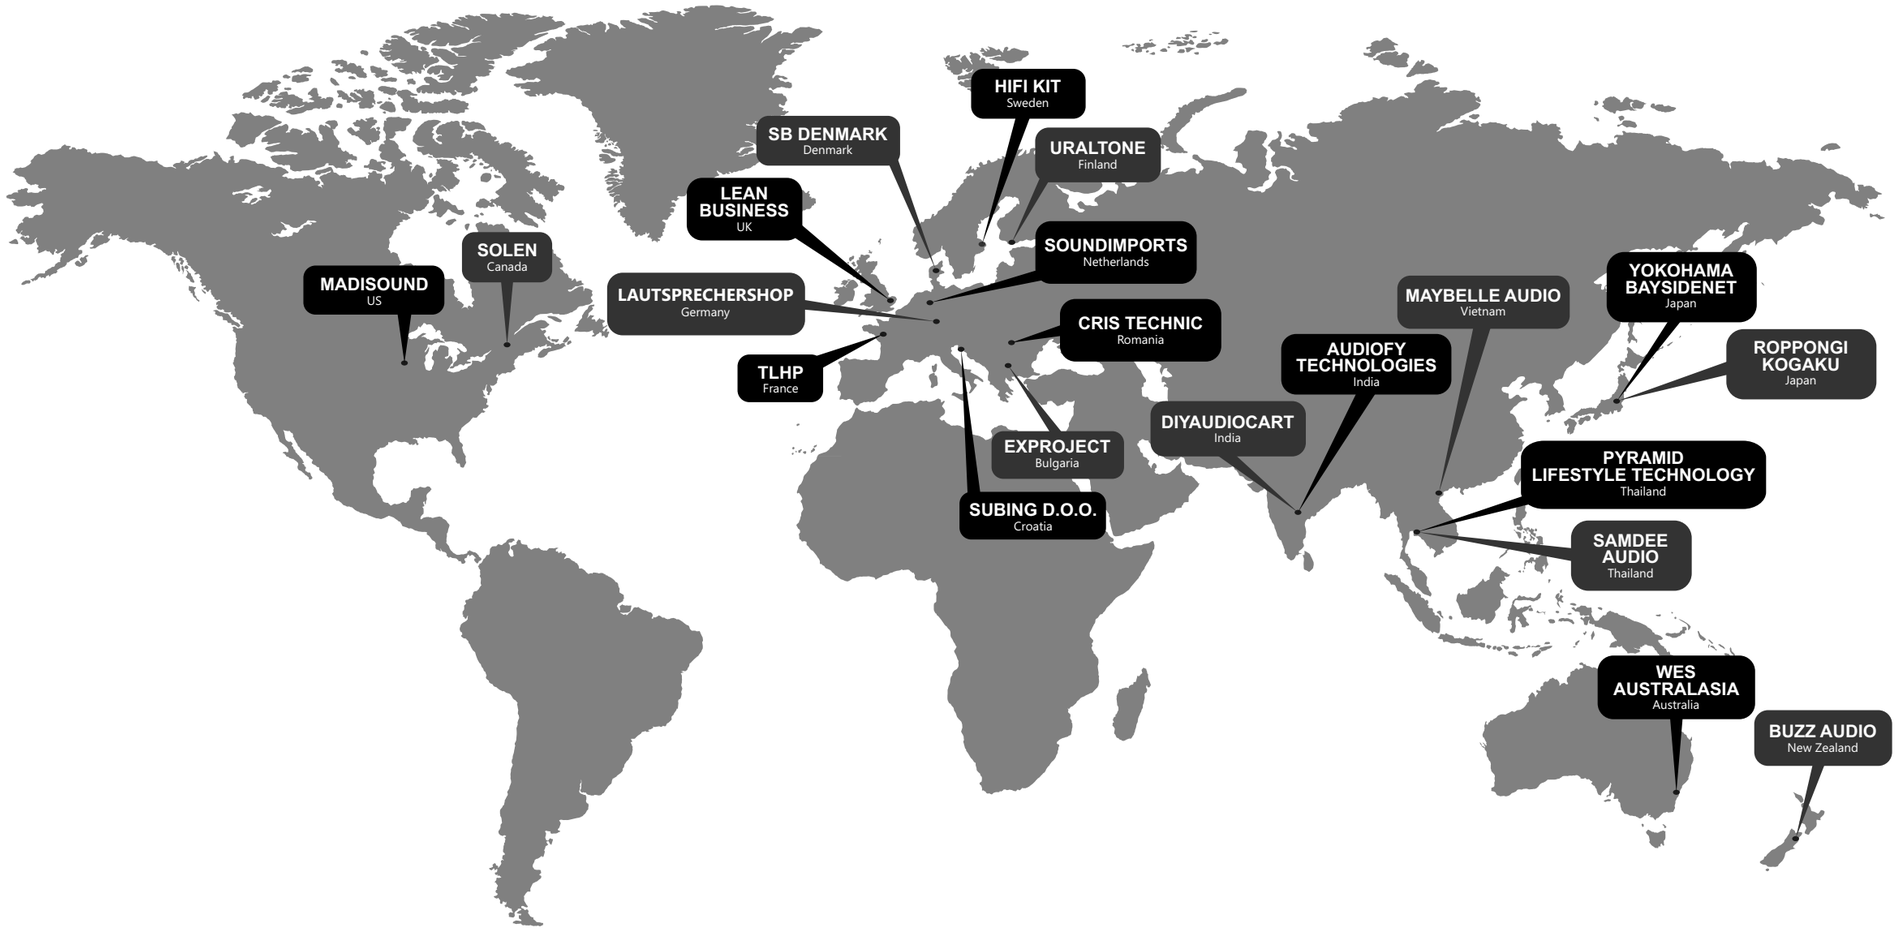

MADISOUND, US - www.madisounspeakerstore.com

SOLEN, Canada - https://solen.ca/en

SB DENMARK, Denmark - https://danesian.dk/

LEAN BUSINESS, United Kingdom - https://www.lean-business.co.uk/eshop/

TLHP, France - https://en.toutlehautparleur.com/

SUBING D.O.O., Croatia - https://subing.hr/

HIFI KIT, Sweden - https://www.hifikit.se/

URALTONE, Finland - https://en.uraltone.com/

SOUNDIMPORTS, Netherlands - https://www.soundimports.eu/

LAUTSPRECHERSHOP, Germany - https://www.lautsprechershop.de

EXPROJECT, Bulgaria - https://www.exproject-bg.com/

CRIS TECHNIC, Romania - www.cristechnic.ro

AUDIOFY TECHNOLOGIES, India - https//www.audiofy.in/

DIYAUDIOCART, India - https://www.diyaudiocart.com/

WES AUSTRALASIA, Australia - https://www.wes.com.au/

BUZZ AUDIO, New Zealand - https://www.buzzaudio.co.nz/

SAMDEE AUDIO, Thailand - https://www.samdee-audio.com/

PYRAMID LIFESTYLE TECHNOLOGY, Thailand - https://www.pltspeaker.com/

MAYBELLE AUDIO, Vietnam - https://www.maybelle.com.vn/

YOKOHAMA BAYSIDENET, Japan - https://www.baysidenet.jp/

ROPPONGI KOGAKU Limited, Japan - https://ritlab.jp/azabu/html/