# Petunjuk Pemakaian



Model: 4" BST-1023 DUAL CONE


**Showroom** 

Surabaya: Jl. Margomulyo No. 5, Tandes - Surabaya.

Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97 RT 06/RW 06 Mangga Besar - Jakarta Barat

Telp.: +62-21 30525443, 6493139, Fax.: +62-21 6493171

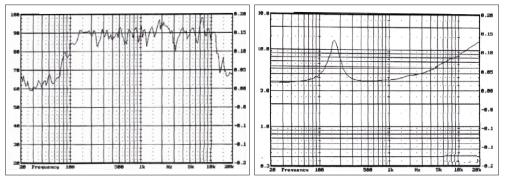

### **Spesifikasi**

Diameter speaker (inch/mm)	4 inch / 101.5 mm	
Daya maksimum (Watt)	50 Watt*	
Lebar daerah frekuensi (Hz)	125 Hz - 13 KHz	
SPL (2.83 V / 1 m) (dB)	88.4dB	
Medan magnet (T)	1.03T	
Berat magnet (Kg/Oz)	0.14 kg / 5.11 Oz	
Voice coil diameter (mm)	20.42 mm	

<sup>\*</sup> IEC 268-5, (in box system, cut.off 20-500 Hz)

#### Parameter "Thiele-Small"

Fs (Hz)	125 Hz
DCR (Ω)	3.6 Ω
Qts	1.27
Qes	1.76
Qms	4.6
Mms (g)	2.3 g
Cms (mm/N)	0.318 mm/N
BL Product (Tm)	2.37 Tm
Vas (liters)	1.25 liters
No (%)	0.43 %
Sd (cm <sup>2</sup> )	53 cm <sup>2</sup>
Xmax (mm)	1.5 mm

## Perhatian!

Sebelum memulai instalasi (pemasangan),harap memperhatikan instalasi dasar. Jika anda belum mempunyai pengalaman dalam pemasangan, kami sarankan anda datang dan berkonsultasi dengan dealer yang terdekat.

# Pemasangan kawat (listrik)



