

LG-1098-2 Legacy | 10 Inch - Subwoofer











Respon Frekuensi

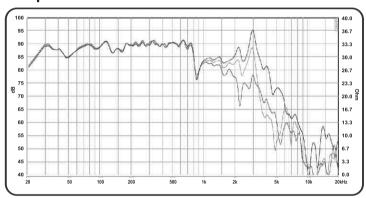

Impedansi

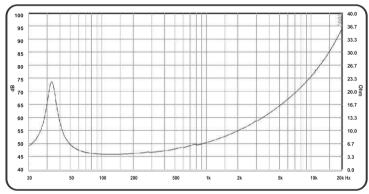

Spesifikasi

Diameter Speaker (inch/mm)		10 inch / 254 mm
Impedansi (Ω)		4 Ω
Nom	inal power handling (Watt)1	150 Watt
Prog	ram power (Watt) ²	300 Watt
Leba	r daerah frekuensi (Hz)	32 Hz - 4200 Hz
SPL (2.83 V / 1 m) (dB)		89 dB
Meda	an magnet (T)	0.85 T
Bera	t magnet (Kg/Oz)	0.81 kg / 28.5 Oz
Voice	e coil diameter (mm)	49.5 mm
Voice	e coil material	ASV


- (¹) AES standard, test mode with continuous pink noise signal (6 dB crest factor; 2 hours) within the Fo to 10Fo power calculated on rated nominal impedance. Loudspeaker in free air
- (²) Power on continous program is defined as 3dB greater than nominal power handling.


Parameter "Thiele-Small"	2Ω	4Ω
Frekuensi Resonansi / Fs (Hz)	32 Hz	32 Hz
DCR (Ω)	1.7 Ω	3.4 Ω
Qts	0.35	0.64
Qes	0.38	0.75
Qms	4.3	4.38
Mms (g)	67 g	61.4 g
Cms (mm/N)	0.36 mm/N	0.39 mm/N
BL Product (Tm)	7.8 Tm	7.6 Tm
Vas (liters)	126.2 liters	134.8 liters
No (%)	1.08 %	0.61 %
Sd (cm²)	498.8 cm ²	498.3 cm ²
Xmax (mm)	7.4 mm	7.4 mm


Instalasi











Rev.1 (12.10.2018)

Perhatian!

Sebelum memulai instalasi (pemasangan), harap memperhatikan instalasi dasar. Jika anda belum mempunyai pengalaman dalam pemasangan, kami sarankan anda datang dan berkonsultasi dengan dealer yang terdekat.