
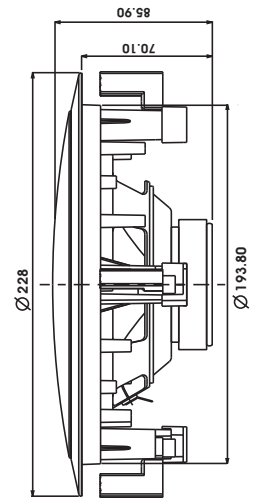
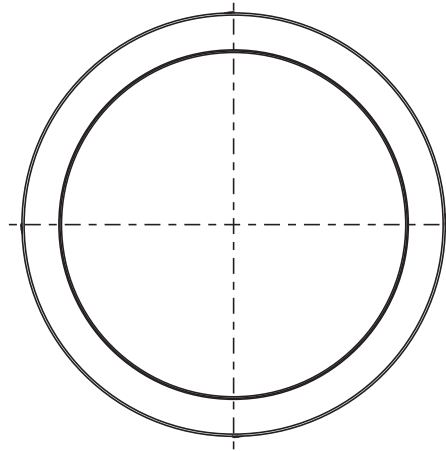


6" 603

Coaxial Ceiling Speaker

ACR®
www.acrspeaker.com

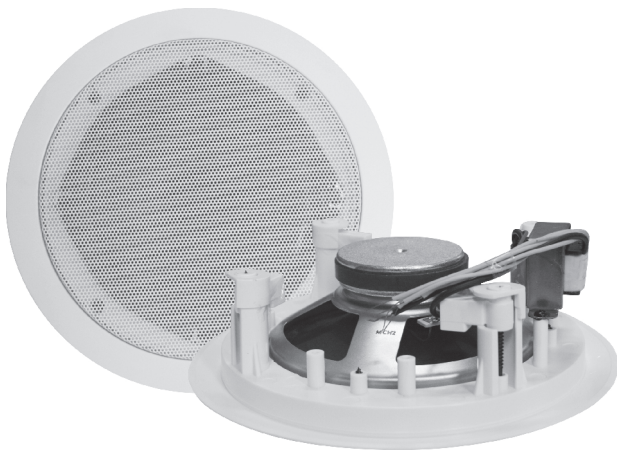

Spec :

| | |
|--------------------|--|
| Model | 603 |
| Type | Flush Ceiling Mount Type |
| Input | 6 W Max. 12 W |
| Rated Impedance | 3.5 K Ω . 7.0 K Ω . 14 K Ω (for 100 V line) 900 Ω . 1.7 K Ω . 3.5 K Ω (for 70 V line) |
| Sensitivity | 91 dB SPL (at 1M . 1W . 1 kHz) |
| Frequency Response | 124 Hz - 20 kHz |
| Line Voltage | 100 V or 70 V line |
| Speaker Component | 6 inch dynamic speaker (rated impedance 8 Ω) |
| Weight | 460 gr |
| Material | ABS |
| Accessory | Screw set, Grill and glue gasket born |

Ket :

* Jika menggunakan arus 100 V, masuk dan keluar power dari amplifier sama dengan perhitungan tabel dibawah ini :

Jika menggunakan Amplifier dengan arus keluar 100 V, hubungkan speaker parallel sehingga jumlah tenaga menjadi :

| | | | |
|---------------------|----------------------------|----------------------------|---------------------------|
| Impedansi input | 3.5 K Ω (Orange) | 7.0 K Ω (Orange) | 14 K Ω (Orange) |
| Sebelum power masuk | 5 W | 2.5 W | 1.25 W |

* Jika menggunakan amplifier dengan arus keluar 70 V, hubungkan speaker parallel, jadi total power sama dengan input amplifier sebagaimana tercantum dalam table berikut ini :

| | | | |
|---------------------|--------------------------|----------------------------|----------------------------|
| Impedansi input | 900 Ω (Orange) | 1.7 K Ω (Orange) | 3.5 K Ω (Orange) |
| Sebelum power masuk | 5 W | 2.5 W | 1.25 W |