
COFFEE CART


REVISED LAYOUT + SERVING LEDGE

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

01 / TOP VIEW

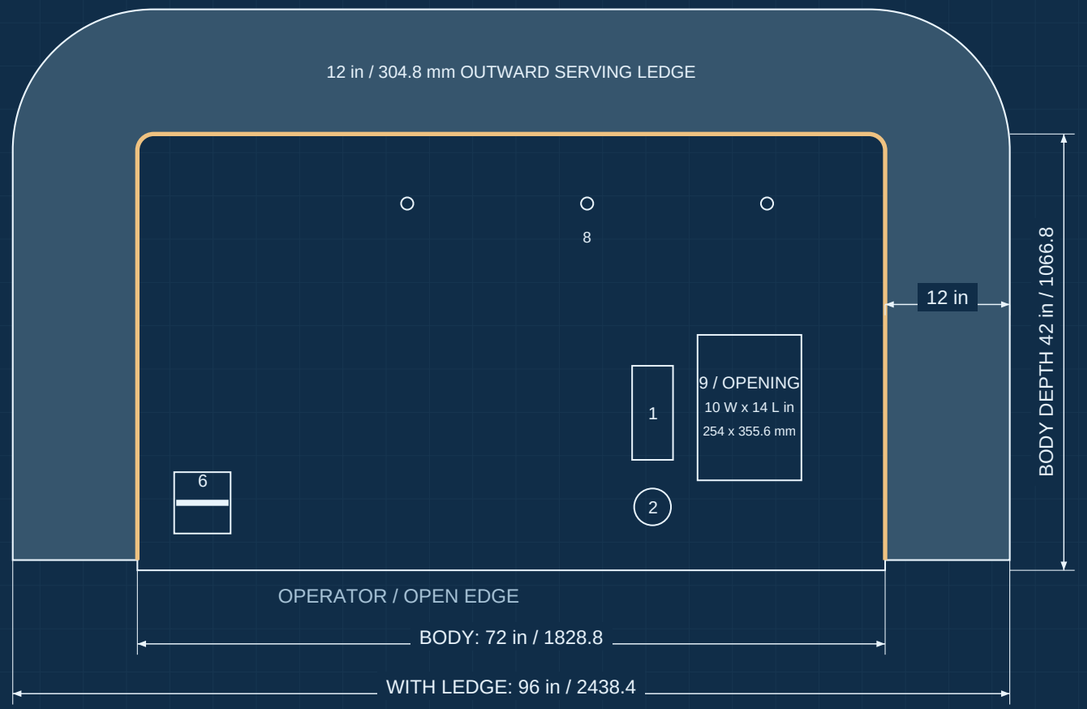

02 / OPERATOR ELEVATION

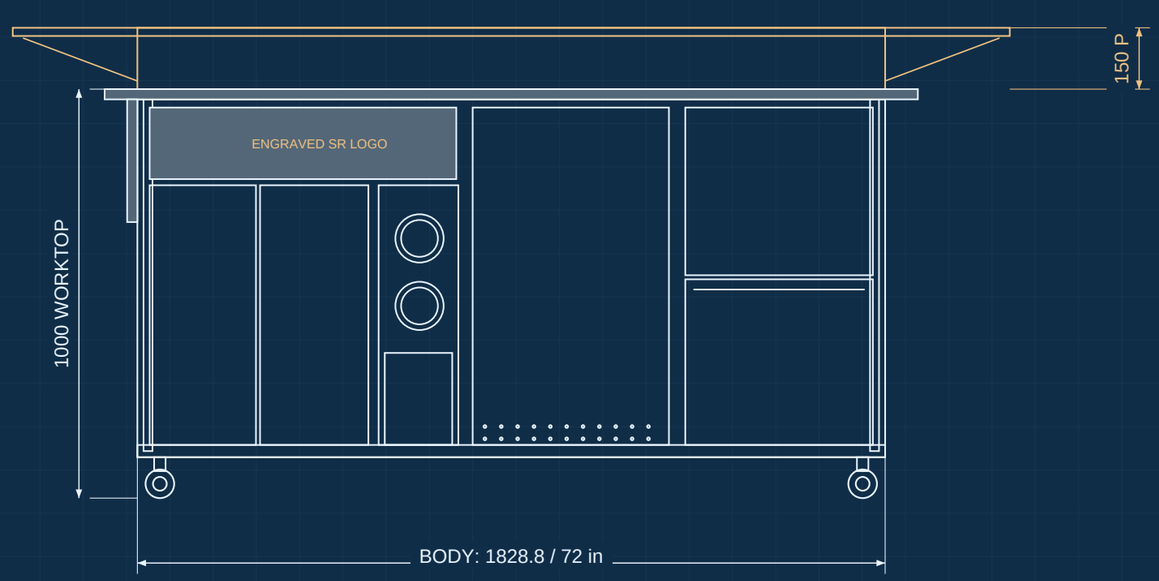

REVISION D / YOUR CHANGES

Features 4 and 5 removed; 3 and 7 stay removed.

Feature 9 is an EMPTY DROP-IN OPENING.

No basin, sink bottom, drain or faucet is supplied.

10 W x 14 L in opening: side-to-side x front-to-back.

New ledge projects 12 in / 304.8 mm OUTWARD along the rear AND both full side guards.

CURRENT TOP FEATURES

1 Rectangular tool well beside the opening.

2 Round tool well beside the opening.

6 Knockbox at operator-front-left corner.
Opening 138 L x 150 W mm, with knock bar.

8 Rear service / parasol holes.

9 Drop-in sink cutout, no installed sink.
10 W x 14 L in / 254 x 355.6 mm.

RETAINED SIZE / PROPOSED HEIGHTS

Body remains 6 ft L x 3.5 ft D / 72 x 42 in.

Exact body: 1828.8 L x 1066.8 D mm.

Worktop height retained: 1000 mm including casters.

Guard height retained P: 150 mm above worktop.

Serving top at guard top P: 1150 mm from floor.

Folding left shelf shown stowed below new ledge.

Updated SR logo: white rear LED + front wood engraving.

Rear LED max 900 W x 700 H; centre height 600 mm P.

Amber + P indicates proposed construction details.

Confirm actual sink template and LED wiring / driver.

COFFEE CART


LEDGE + DROP-IN OPENING DETAILS

CONCEPT BLUEPRINT | 12 in outward serving ledge | Revision D | 27 OCT 2026

03 / CUSTOMER REAR



04 / RIGHT END + OUTWARD LEDGE

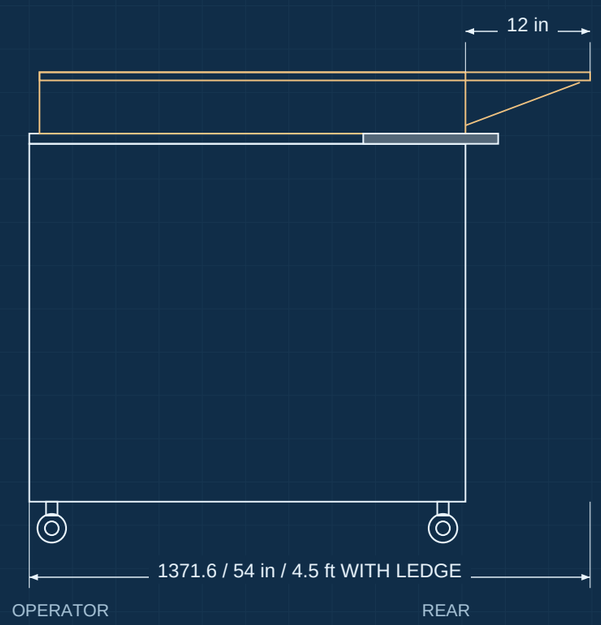

05 / FEATURE 9 - CUTOUT ONLY



X: 254 W / side-to-side; Y: 355.6 L / front-to-back.

Cutout only. Verify actual sink template; no bowl depth.

CUTOUT LOCATIONS / RETAINED

Origin: operator-front-left of MAIN BODY.

X runs right; Y runs toward the customer rear.

Offsets below are proposed. Sizes in mm.

6	Knockbox	90, 90	138 x 150
1	Tool well	1210, 270	100 x 230 P
9	Opening	1370, 220	254 x 355.6

2 Round well center: X=1260, Y=155; diameter 90 P.

8 Hole centers: X=660 / 1100 / 1540; Y=896.8 P.

Feature 9 has no built-in bowl depth or drain.

SERVING LEDGE / THREE SIDES

Horizontal stainless ledge: 12 in / 304.8 deep.

Faces OUTWARD from rear and both end guards.

No serving ledge across the operator edge.

Guard lines moved to body perimeter for full 12 in projection beyond the body; rounded rear corners.

Serving top 1150 high P; folded edge/supports TBD.

Small walnut rail retained below at worktop height.

BODY + NEW OVERALL ENVELOPE

Body: 1828.8 L x 1066.8 D x 1000 H mm.

With serving ledge: 2438.4 L x 1371.6 D mm.

Overall footprint: 8 ft L x 4.5 ft D / 96 x 54 in.

Overall height P: 1150 mm to serving surface.

Updated SR logo: rear LED and engraved front walnut.

FABRICATION DETAILS TO CONFIRM

Source metal options: 201 / 304; 1.2 / 2.0 / 3.0 mm.

Verify your sink cutout template, flange and clearances.

Ledge brackets, welds, load rating, frame and caster stability require fabrication design; not calculated here.