

ST 5000 RL

Infant radiant warmer



The open-bed radiant heater provides the support needed for babies to catch the same temperature in the mother's womb. A baby heater is a baby care unit that is used in the neonatal and infant services of hospitals.

TECHNICAL SPECIFICATIONS

Modes:

- Warm up
- Servo
- Manuel

Display:

- 7" Color Touch Screen
- Large LED display for APGAR timer/ timer setting, X Ray Casette.

Heater Source:

- Imported quartz heater
- Heater power – 600 Watts Max

Alarms:

- Audio Visual Alarms
- High Temperature (+1.0° C of set temperature)
- Low temperature (-1.0° C of set temperature)
- Sensor failure
- Power failure
- Heater failure
- Automatic cut-off

Temperature Settings:

- Servo Skin Mode
- Skin Temperature sensor – Active
- Accuracy $\pm 0.1^{\circ}\text{C}$ (31°C to 37°C)
- Set temperature range : 32°C to 38°C

Electrical Specification:

- 220-240V, 50/60 Hz
- Examination lamp Led

ST 5000 R

Infant radiant warmer



The open-bed radiant heater provides the support needed for babies to catch the same temperature in the mother's womb. A baby heater is a baby care unit that is used in the neonatal and infant services of hospitals.

TECHNICAL SPECIFICATIONS

Modes:

- Skin
- Servo

Display:

- Large Seven segment LED display for patient temperature
- Monochrome LED display for temperature setting
- Large LED display for APGAR timer/ timer setting. X Ray Cassette.

Heater Source:

- Imported quartz heater
- Heater power – 600 Watts Max

Alarms:

- Audio Visual Alarms
- High Temperature (+1.0° C of set temperature)
- Low temperature (-1.0° C of set temperature)
- Sensor failure
- Power failure
- Heater failure
- Automatic cut-off

Temperature Settings:

- Servo Skin Mode
- Skin Temperature sensor – Active
- Accuracy +/- 0.1° C (31°C to 37°C)
- Set temperature range : 32°C to 38°C

Electrical Specification:

- 220-240V, 50/60 Hz
- Examination lamp Led

TM 1500

I.C.U hospital beds with column motors



BATTERY AVAILABLE




GENERAL SPECIFICATIONS

- LEG AND BACK MOVEMENTS, HEIGHT, VASCULAR, KNEE MOVEMENT, CARDIAC, TRENDLENBURG AND REVERSE TRENDLENBURG ARE CONTROLLED BY 2 DC MOTORS AND 2 COLUMN MOTORS
- POSITIONS ARE CONTROLLED BY CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS AND INNER SIDES OF THE FOOT SIDE RAILS
- ELECTRONIC CPR AND LOCKING FUNCTION ARE CONTROLLED ONLY BY THE CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS
- HEAD AND FOOT BOARDS MADE OF PP PLASTIC, EASILY DEMONTABLE AND CLEARABLE.
- 4 PIECES GAS SPRING ASSISTED SIDE RAILS MADE OF PP PLASTIC, EASILY CLEARABLE
- 4 PIECES LAYING SURFACE MADE OF ABS PLASTIC, EASILY CLEARABLE
- X-RAY CONDUCTIVE CASSETTE PLACE, AUTOMATIC BACK SLIDING AND MANUAL CPR FUNCTION
- ABS PLASTIC COVERED CHASSIS, ELECTROSTATIC PAINTED METAL PARTS
- Ø125 mm, 360° SWIVEL WHEELS WITH CENTRAL BREAK SYSTEM AND DIRECTIONAL LOCK
- 4 IV POLE ADAPTORS ON 4 CORNERS OF THE BED, 1 ADJUSTABLE IV POLE AND 2 DRAINAGE ADAPTORS ON BOTH SIDES OF THE BED
- 4 BUMPERS ON THE 4 CORNERS OF THE BED
- TRENDLENBURG AND BACKREST ANGLE INDICATOR
- COLOUR OPTIONS AVAILABLE FOR SIDE RAILS (FOR COLOUR OPTIONS SEE ACCESSORIES PAGE)

TECHNIC

Motor	: 4 Motor / Actuators
Power	: 110 – 220 V 50-60Hz AC
Weight	: 150 kg
Safe Working Load	: 250 kg

AL SPECIFICATIONS

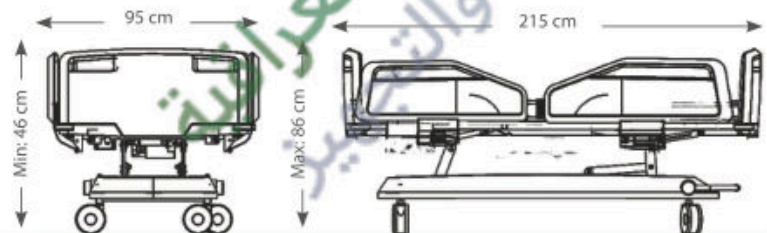

OPERATION ANGLES



BACK MOVEMENT
0°-70°



LEG MOVEMENT
0°-30°



VASCULAR



KNEE MOVEMENT



HEIGHT



TRENDLENBURG
0°-17°



CARDIAC

TM 1400

hospital beds with 4 motors



BATTERY AVAILABLE




GENERAL SPECIFICATIONS

- LEG AND BACK MOVEMENTS, HEIGHT, VASCULAR, KNEE MOVEMENT, CARDIAC, TRENDLENBURG AND REVERSE TRENDLENBURG ARE CONTROLLED BY 4 DC MOTORS
- POSITIONS ARE CONTROLLED BY CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS AND INNER SIDES OF THE FOOT SIDE RAILS
- ELECTRONIC CPR AND LOCKING FUNCTION ARE CONTROLLED ONLY BY THE CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS
- HEAD AND FOOT BOARDS MADE OF PP PLASTIC, EASILY DEMONTABLE AND HYDRAULIC SIDE RAILS MADE OF PP PLASTIC, EASILY CLEARABLE
- 4 PIECES LAYING SURFACE MADE OF ABS PLASTIC, EASILY CLEARABLE
- AUTOMATIC BACK SLIDING FUNCTION
- ABS PLASTIC COVERED CHASIS, ELECTROSTATIC PAINTED METAL PARTS
- Ø125 mm, 360° SWIVEL WHEELS WITH CENTRAL BREAK SYSTEM AND DIRECTIONAL LOCK
- 4 IV POLE ADAPTORS ON 4 CORNERS OF THE BED, 1 ADJUSTABLE IV POLE AND 2 DRAINAGE ADAPTORS ON BOTH SIDES OF THE BED
- 4 BUMPERS ON THE 4 CORNERS OF THE BED
- TRENDLENBURG AND BACKREST ANGLE INDICATOR
- COLOUR OPTIONS AVAILABLE FOR SIDE RAILS (FOR COLOUR OPTIONS SEE ACCESSORIES PAGE)

TECHNICAL SPECIFICATIONS

Motor	: 4 Motor / Actuators
Power	: 110 – 220 V 50-60Hz AC
Weight	: 140 kg
Safe Working Load	: 250 kg

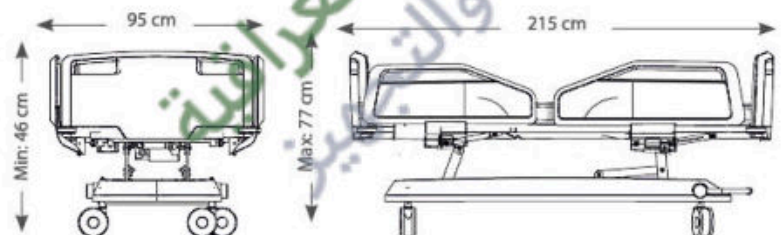

OPERATION ANGLES



BACK MOVEMENT
0°-70°



LEG MOVEMENT
0°-30°



VASCULAR



KNEE MOVEMENT



HEIGHT



TRENDLENBURG
0°-17°



TM 1300

hospital beds with 3 motors



BATTERY AVAILABLE




GENERAL SPECIFICATIONS

- LEG AND BACK MOVEMENTS, HEIGHT, VASCULAR, KNEE MOVEMENT CONTROLLED BY 3 DC MOTORS
- POSITIONS ARE CONTROLLED BY CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS AND INNER SIDES OF THE FOOT SIDE RAILS
- ELECTRONIC CPR AND LOCKING FUNCTION ARE CONTROLLED ONLY BY THE CONTROL PANELS LOCATED ON OUTER SIDES OF THE HEAD SIDE RAILS
- HEAD AND FOOT BOARDS MADE OF PP PLASTIC, EASILY DEMONTABLE AND HYDRAULIC SIDE RAILS MADE OF PP PLASTIC, EASILY CLEARABLE
- 4 PIECES LAYING SURFACE MADE OF ABS PLASTIC, EASILY CLEARABLE
- AUTOMATIC BACK SLIDING FUNCTION
- ABS PLASTIC COVERED CHASSIS, ELECTROSTATIC PAINTED METAL PARTS
- Ø125 mm, 360° SWIVEL WHEELS WITH CROSS BREAK SYSTEM
- 4 IV POLE ADAPTORS ON 4 CORNERS OF THE BED, 1 ADJUSTABLE IV POLE AND 2 DRAINAGE ADAPTORS ON BOTH SIDES OF THE BED
- 4 BUMPERS ON THE 4 CORNERS OF THE BED
- TRENDLENBURG AND BACKREST ANGLE INDICATOR
- COLOUR OPTIONS AVAILABLE FOR SIDE RAILS (FOR COLOUR OPTIONS SEE ACCESSORIES PAGE)

TECHNICAL SPECIFICATIONS

Motor	: 3 Motor / Actuators
Power	: 110 – 220 V 50-60Hz AC
Weight	: 140 kg
Safe Working Load	: 250 kg

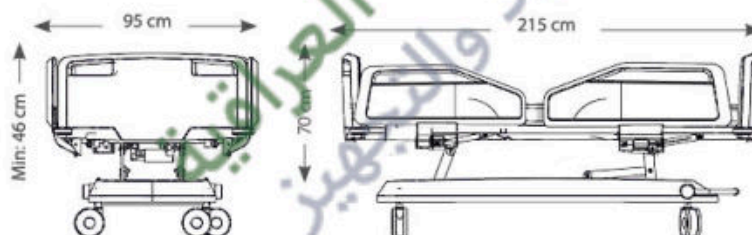

OPERATION ANGLES



BACK MOVEMENT
0°-70°



LEG MOVEMENT
0°-30°



VASCULAR



KNEE MOVEMENT



HEIGHT

TM 1200

hospital beds with 2 motors



BATTERY AVAILABLE




GENERAL SPECIFICATIONS

- LEG AND BACK MOVEMENTS, HEIGHT, VASCULAR, KNEE MOVEMENT CONTROLLED BY 3 DC MOTORS
- POSITIONS ARE CONTROLLED BY HAND REMOTE CONTROL
- HEAD AND FOOT BOARDS MADE OF PP PLASTIC, EASILY DEMONTABLE AND HYDRAULIC SIDE RAILS MADE OF PP PLASTIC, EASILY CLEARABLE
- 4 PIECES LAYING SURFACE MADE OF ABS PLASTIC, EASILY CLEARABLE
- AUTOMATIC BACK SLIDING FUNCTION
- ABS PLASTIC COVERED CHASIS, ELECTROSTATIC PAINTED METAL PARTS
- Ø125 mm, 360° SWIVEL WHEELS WITH CROSS BREAK SYSTEM
- 4 IV POLE ADAPTORS ON 4 CORNERS OF THE BED, 1 ADJUSTABLE IV POLE AND 2 DRAINAGE ADAPTORS ON BOTH SIDES OF THE BED
- 4 BUMPERS ON THE 4 CORNERS OF THE BED
- TRENDLENBURG AND BACKREST ANGLE INDICATOR
- COLOUR OPTIONS AVAILABLE FOR SIDE RAILS (FOR COLOUR OPTIONS SEE ACCESSORIES PAGE)

TECHNICAL SPECIFICATIONS

Motor	: 4 Motor / Actuators
Power	: 110 – 220 V 50-60Hz AC
Weight	: 130 kg
Safe Working Load	: 250 kg

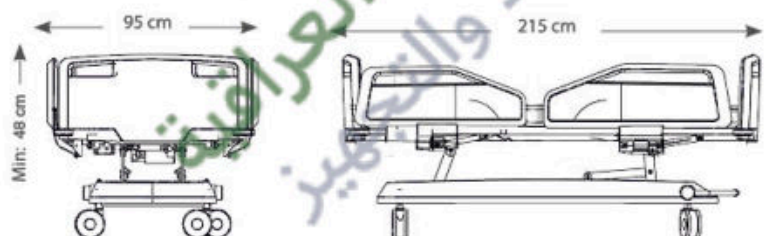

OPERATION ANGLES



BACK MOVEMENT
0° - 70°



TRENDELENBURG
0° - 17°



LEG MOVEMENT
0° - 30°



VASCULAR



KNEE MOVEMENT

TM 5400N

wooden speacial care beds



Min. height: 37,5 cm
(Lower o avg. knee length)

GENERAL SPECIFICATIONS

- LEG AND BACK MOVEMENTS, HEIGHT, VASCULAR, KNEE MOVEMENT, CARDIAC, TRENDLENBURG AND REVERSE TRENDLENBURG POSITION ARE CONTROLLED BY 4 DC MOTORS
- POSITIONS ARE CONTROLLED BY HAND REMOTE CONTROL AND NURSE REMOTE CONTROL
- ELECTRONIC CPR AND LOCKING FUNCTION ARE CONTROLLED ONLY BY THE NURSE REMOTE CONTROL
- HEAD BOARD, FOOT BOARD AND SIDE RAILS MADE OF WOODEN.
- 4 PIECES LAYING SURFACE MADE OF ABS PLASTIC, EASILY CLEARTABLE
- OPEN CHASIS, ELECTROSTATIC PAINTED MEAL PARTS
- ABS PLASTIC COVERED CHASIS, ELECROSAIC PAINED MEAL PARTS
- Ø125 mm, 360° SWIVEL WHEELS WITH CENRAL BREAK SYSTEM AND DIRECIONAL LOCK
- 4 IV POLE ADAPORS ON 4 CORNERS OF THE BED,1 ADJUSTABLE IV POLE

TECHNIC

Moor	: 4 Moor / Acuaors
Power	: 110 – 220 V 50-60Hz AC
Weight	: 140 kg
Safe Working Load	: 250 kg

AL SPECIFICAIONS



OPERATION ANGLES

 BACK MOVEMENT 0°-70°	 LEG MOVEMENT 0°-30°	 VASCULAR	 KNEE MOVEMENT
 HEIGHT	 TRENDLENBURG 0°-17°	 CARDIAC	

TM 501

Aluminium hospital beds with column motors



Dimensions and Adjustment Ranges

External Dimensions	: 224 cm x 102 cm
Mattress Dimensions	: 90 x 200 cm
Mattress Base Heights	: 44 - 84 cm
Trendelenburg Position	: 0° - 17°
Reverse Trendelenburg	: 0° - 17°
Backrest Angle	: 70°
Thigh Rest Angle	: 34°
Raised Straight Leg Position	: 16°
Castor	: ø 150 mm
Total Weight	: 155 kg
Safe Working Load	: 260 kg
Max Patient Weight	: 220-230 kg



STANDARD SPECIFICATION

- Headrest, legrest, height and trendelenburg adjustment with electronic motors
- Hand control unit
- Nurse control panel
- With the help of nurse control panel, lockable back and foot side motors
- Mechanical CPR (flat position of bed backrest for emergency)
- Electronic CPR
- Fowler and Vascular positions
- Knee moves adjustment with gradual mechanism
- Laminate material
- 360 movable castors with central locking
- Plastic protection bumpers
- Urine bag holder
- Belt hook
- Accessory slots
- Battery
- Height adjustable IV Pole
- Electrostatic powder coating
- X-Ray
- Bed extension - 18cm (optional)
- 32 density mattress



TM 504

4 motors hospital bed



TECHNICAL SPECIFICATIONS

- HEADRES, LEGRES, HEIGHT AND TRENDLENBURG ADJUSTMENT WITH ELECTRONIC MOTORS.
- HAND CONTROL UNIT
- NURSE CONTROL PANEL
- WITH THE HELP OF NURSE CONTROL PANEL, LOCKABLE BACK AND FOOT SIDE MOTORS
- ELECTRONIC CPR
- FOWLER AND VASCULAR POSITIONS
- KNEE MOVES ADJUSTMENT WITH GRADUAL MECHANISM
- EASILY REMOVABLE FIXED HEAD AND FOOT BOARDS MADE FROM ALUMINIUM AND COMPACT LAMINATE MATERIAL
- 360° MOVABLE CASTORS WITH CENTRAL LOCKING (125 MM) PLASTIC PROTECTION BUMPERS
- URINE BAG HOLDER
- HEIGHT ADJUSTABLE IV POLE
- ELECTROSTATIC POWDER COATING
- 32 DENSITY MATTRESS



OPERATION ANGLES

OPERATION ANGLES			
 BA 0°-70°	 LEG MOVEMENT 0°-30°	 BACK-LEG MOVEMENT	 KNEE MOVEMENT
 HEIGHT	 TRENDLENBURG 0°-17°	 CARDIAC	 VOUPOSITION

TM 503

3 motors hospital bed



TECHNICAL SPECIFICATIONS

- HEADREST, LEGREST, HEIGHT AND TRENDLENBURG ADJUSTMENT WITH ELECTRONIC MOTORS.
- HAND CONTROL UNIT
- ELECTRONIC CPR
- FOWLER AND VASCULAR POSITIONS
- KNEE MOVES ADJUSTMENT WITH GRADUAL MECHANISM
- EASILY REMOVABLE FIXED HEAD AND FOOT BOARDS MADE FROM ALUMINIUM AND COMPACT LAMINATE MATERIAL
- 360° MOVABLE CASTORS (125 MM) PLASTIC PROTECTION BUMPERS
- URINE BAG HOLDER
- BELT HOOK
- ACCESSORY SLOTS
- HEIGHT ADJUSTABLE IV POLE
- ELECTROSTATIC POWDER COATING
- 32 DENSITY MATTRESS



OPERATION ANGLES

BA 0°-70°	LEG MOVEMENT 0°-30°	BACK-LEG MOVEMENT	KNEE MOVEMENT
HEIGHT	TRENDLENBURG 0°-17°	CARDIAC	TV OUT POSITION

TM 502

2 motors hospital bed



BATTERY AVAILABLE

TECHNICAL SPECIFICATIONS

- HEADREST, LEGREST, HEIGHT AND TRENDELBURG ADJUSTMENT WITH ELECTRONIC MOTORS.
- HAND CONTROL UNIT
- FOWLER AND VASCULAR POSITIONS
- KNEE MOVES ADJUSTMENT WITH GRADUAL MECHANISM
- EASILY REMOVABLE FIXED HEAD AND FOOT BOARDS MADE FROM ALUMINIUM AND COMPACT LAMINATE MATERIAL
- 360° MOVABLE CASTORS (125 MM) PLASTIC PROTECTION BUMPERS
- URINE BAG HOLDER
- BELT HOOK
- ACCESSORY SLOTS
- HEIGHT ADJUSTABLE IV POLE
- ELECTROSTATIC POWDER COATING
- 32 DENSITY MATTRESS



OPERATION ANGLES

CE MOVEMENT



BA

0°-70°



LEG MOVEMENT

0°-30°



BACK-LEG MOVEMENT



KNEE MOVEMENT



HEIGHT



TRENDELBURG

0°-17°



CARDIAC



TV OUT POSITION

PB 01

Pediatric hospital bed



PBC 01

Pediatric Baby Crib



TM 718

Blood Donor Chair



GENERAL SPECIFICATIONS

- SYNCHRONOUS ADJUSTABLE BACK SIDE AND FOOT WITH HYDRAULIC SYSTEM
- BLOOD DONOR ARMLET ON BOTH SIDES
- IT BECOMES STRETCHER IN EMERGENCY
- DIMENSION: 50 x 80 x 120h

TM 100S

Mattress



GENERAL SPECIFICATIONS

Zippered water proof mattress adaptable to the movements of the bed
Dimension: Width 90x190 cm, height 11 cm

TM 100VS

Mattress



GENERAL SPECIFICATIONS

Visco elastic, zippered proof mattress adaptable to the movements of the bed
Dimension: Width 90x190 cm, height 11 cm

BSC 100

Bed side cabinet with abs




BSC 100R

Bed side cabinet with mini bar



BSC 100C

Bed side cabinet - compact

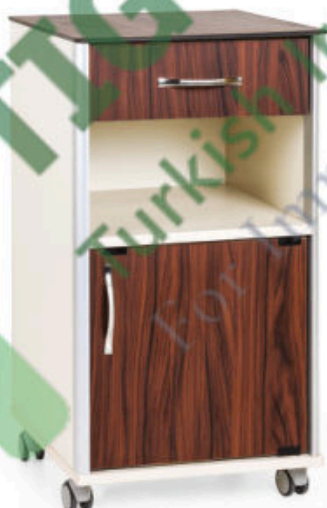

BSC 100F

Bed side cabinet with over bed table



BSC 101

Bed side cabinet



OBT 101

Over bed table



OBT 101

Over bed table with MDF top

GENERAL SPECIFICATIONS

- METAL BODY
- WOODEN TOP
- HEIGHT ADJUSTABLE WITH HYDRAULIC
- 360 DEGREES SWIVEL CASTERS



OBT 102CT

Over bed table with compact (tilt mechanism)

GENERAL SPECIFICATIONS

- METAL BODY
- HDL COMPACT TOP
- TILT MECHANISM
- GAS-SPRING HEIGHT ADJUSTMENT
- 360 DEGREES SWIVEL WHEELS



OBT 100P

Over bed table with abs top

GENERAL SPECIFICATIONS

- WHOLE ABS BODY
- ABS TOP
- HEIGHT ADJUSTABLE WITH HYDRAULIC
- SWIVEL 360 DEGREES CASTERS



OBT 100PT

Over bed table with abs top (tilt mechanism)

GENERAL SPECIFICATIONS

- METAL BODY
- ABS TOP WITH TILT MECHANISM
- HEIGHT ADJUSTABLE WITH HYDRAULIC
- 360 DEGREES SWIVEL CASTERS



TM 100

Emergency stretcher



PATIENT MANAGEMENT SOLUTIONS

EMERGENCY STRETCHER FOR TRAUMA, TRANSFER AND EXAMINATION CASES.
ADVANCED MOBILITY, SAFETY AND EFFICIENCY.



HEIGHT ADJUSTMENT

- Dual sided foot pedals for hi-lo and trendelenburg / reverse trendelenburg
- Safe working load 300 kg



X-RAY FEATURE

- Full length x-ray compatible
- Upper part x-ray compatible



BUMPERS

- Bumpers on 4 corners of the stretcher.



MULTI FUNCTIONAL CHASSIS

- Storage for patient's belongings and oxygen bottle holder



SIDE RAILS

- Full length, polyurethane side rails are robust and easy to use.



PATIENT MANAGEMENT SOLUTIONS



ADVANCED MOBILITY

- Easytrack by 5th castor.
- 360° swivel wheels with central brake system.



TRENDELBURG

- Trendelenburg and reverse trendelenburg functions by a lever under the head part.



BACK MOVEMENT


- Backrest adjustment by gas spring.
- Easily adjusted up to 75 degrees.



IV POLES

- Chrome plated IV poles on both sides of the stretcher.
- Each IV pole has 2 hooks

TECHNICAL INFORMATION

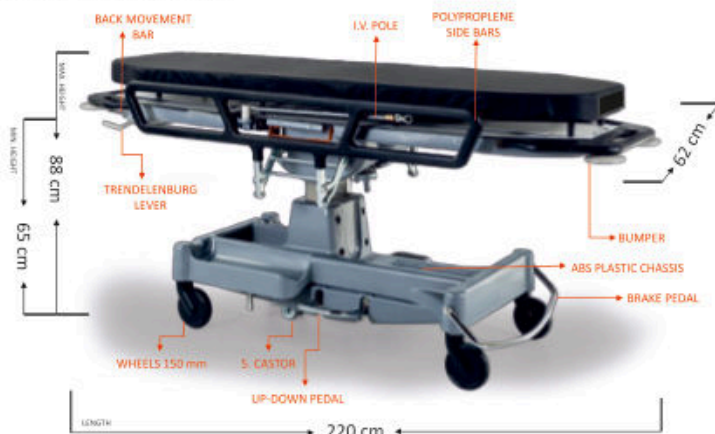

TM 100H

Hydraulic stretcher



GENERAL SPECIFICATIONS

- BACK SIDE ADJUSTMENT BY GAS SPRING
- UPPER CHASSIS ON WHEEL CRADLE
- DOUBLE LOWER TROLLEYS CAN BE CONNECTED
- POLYURETHANE SIDE RAILS
- 1PIECES IV POLE
- 4 BUMPERS ON THE 4 CORNERS OF THE STRETCHER
- Ø150 mm, 360° SWIVEL WHEELS WITH CENTRAL BREAK SYSTEM AND DIRECTIONAL LOCK
- ABS PLASTIC COVERED CHASIS, ELECTROSTATIC PAINTED METAL PARTS




TECHNIC

Manual : 3 Movement

Weight : 100 kg

Safe Working Load : 170 kg

AL SPECIFICATIONS

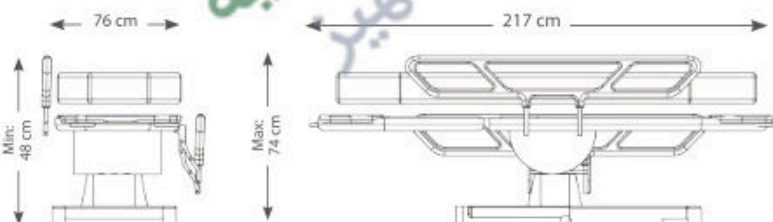

OPERATION ANGLES



BACK MOVEMENT
0°-70°



HEIGHT



TRENDELENBURG
0°-12°

THERAPY TABLE

2 section

TMU2H - Hydraulic height elevation

TMU2E - Electric height elevation



STANDARD SPECIFICATION

- Safe working load and lifting capacity of 250kg (39 stone)
- Choice of 2 models - hydraulic or electric height elevation
- Excellent height range from 48cm (19") to 97cm (38")
- 50mm high density flame-retardant foam
- Antimicrobial contoured upholstery
- Fully compliant and CE marked
- The power assisted head section incorporates anti-trap design
- Hand switch fitted as standard on electric models
- Hoist clearance along entire length of couch
- Purpose made precision bearings on all pivot points
- Gas spring assisted back rest from -30 to +75 degrees

OPTIONAL ACCESSORIES


- Single foot switch operation for electric models
- Double foot switch operation for electric models
- Paper towel holder
- Phlebotomy arm
- Cot sides (powder coated, chrome plated or padded)

DIMENSIONS

Length: 192cm (head 69cm, seat 122cm)
Width: 66cm
Safe Load: 250kg
Height range: 48cm - 97cm

WARRANTY

- 3 year warranty on moving components
- Lifetime warranty on frame

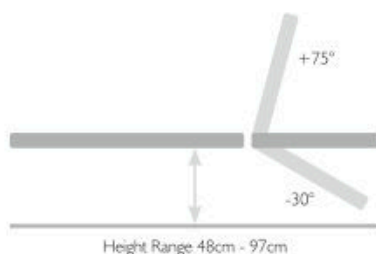

Safe working
load and lifting
capacity of 250kg
(39 stone)



THERAPY TABLE

3 section

TMU3H - Hydraulic height elevation

TMU3E - Electric height elevation




STANDARD SPECIFICATION

- ☐ Safe working load and lifting capacity of 250kg (39 stone)
- ☐ Choice of 2 models - hydraulic or electric height elevation
- ☐ Gas spring assisted back rest from -30 to +75 degrees
- ☐ The power assisted head section incorporates anti-trap design
- ☐ Excellent height range from 48cm (19") to 97cm (38")
- ☐ Purpose made precision bearings on all pivot points
- ☐ Hoist clearance along entire length of couch
- ☐ Hand switch fitted as standard on electric models
- ☐ 50mm high density flame-retardant foam
- ☐ Antimicrobial contoured upholstery
- ☐ Fully compliant and CE marked

OPTIONAL ACCESSORIES

- ☐ Single foot switch operation for electric models
- ☐ Double foot switch operation for electric models
- ☐ Paper towel holder
- ☐ Phlebotomy arm
- ☐ Cot sides (powder coated, chrome plated or padded)

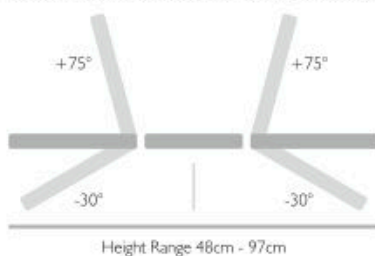

DIMENSIONS

Length: 192cm (head 69cm, seat 50cm, foot 68cm)
 Width: 66cm
 Safe Load: 250kg
 Height range: 48cm - 97cm

WARRANTY

- ☐ 3 year warranty on moving components
- ☐ Lifetime warranty on frame

Safe working
load and lifting
capacity of 250kg
(39 stone)



TREATMENT TABLE 2&3 SECTION

2 Section: TMP2H - Hydraulic height elevation **TMP2E** - Electric height elevation

3 Section: TMP3H - Hydraulic height elevation **TMP3E** - Electric height elevation



STANDARD SPECIFICATION

- ☒ Safe working load and lifting capacity of 170kg (26 stone)
- ☒ Hoist clearance along entire length of couch
- ☒ 125mm diameter individually locking castors
- ☒ Excellent height range from 50cm (20") to 95cm (37")
- ☒ 50mm high density flame-retardant foam
- ☒ Antimicrobial upholstery
- ☒ Fully compliant and CE marked
- ☒ Hand switch fitted as standard on electric models
- ☒ Gas spring assisted back rest from -30 to +90 degrees with anti-trap design

OPTIONAL ACCESSORIES

- ☒ Cot sides (powder coated, chrome plated or padded)
- ☒ Single foot switch operation for electric models
- ☒ Paper towel holder
- ☒ Phlebotomy arm
- ☒ Breathing hole

WARRANTY

- ☒ 1 year warranty on moving components
- ☒ 3 year warranty on frame


Safe working
load and lifting
capacity of 170kg
(26 stone)



2 Section:



3 Section:

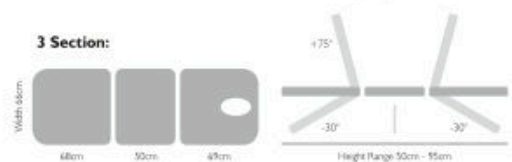

TT 01

Tilt table



TECHNICAL SPECIFICATIONS

- THE TABLE HAS BEEN DESIGNED TO GIVEN VERTICAL POSITION FROM THE HORIZONTAL POSITION OF THE PATIENT.
- IT IS MONOLITHIC AND HAS A 90° INCLINABLE PART FOR PATIENT FEET COMFORT.
- IT IS OPERATED BY CONSUMING 220 VOLT TO ADJUSTING THE TABLE BETWEEN 0-90 DEGREE INCLINING POSITIONS.
- IT HAS A REMOVE CONTROL TO GIVE THE MATCH POSITION TO THE PATIENT.
- LYING SURFACE IS MADE OF MDF, HAS A SPONGE LAYER AT THE TOP AND COVERED BY ARTIFICIAL LEATHER.
- IT HAS WHEELS TO COMFORT OF THE PATIENT TRANSFER.
- IT HAS TWO ARM-RESTS.
- CARRIAGE CAPACITY IS MAXIMUM: 230 KG.
- IT CAN BE PRODUCED INCLUDED ONE ADDITIONAL MOTOR TO MOVE UP-DOWN IF DEMANDED.

DIMENSIONS:

- 200x90 CM.
- MATTRESS HIGHNESS IS 8 CM.

ACESSORIES:

- BACK SIDE FIXING STRIP,
- KNEE SIDE FIXING STRIP,
- ARM SUPPORTIVE AND FIXING STICKS,
- CLAMPS FOR FIXING BELTS

BB 01

Bobath Bed



GENERAL SPECIFICATIONS

- Designed for physical exercise on the bed.
- Maximum height 5-10 cm adjustable with electric motor system.
- Easily movable to the needed point through its lightness.
- Platform dimensions: 120x200 cm.
- Remote height adjust control.
- Remote height adjust control.
- Locked wheel system.
- Max lifting capacity : 175 kg.

ART 01

Stainless steel transfer chair



TECHNICAL SPECIFICATIONS

Weight : 50 kg

Safe Working Load : 170 kg



TC 100

Patient transfer chair



TECHNICAL SPECIFICATIONS

Weight : 50 kg

Safe Working Load : 170 kg



MT 101

Wooden examination couch



MT 102

Wooden examination couch
With Drawers




EX 01M

PATIENT MOTORIZED EXAMINATION COUCH

GENERAL SPECIFICATIONS

- Height adjustment with electronic motor.
- Movable headrest with the help of damper mechanism
- Easily movable to the needed point through its lightness
- More hygienical examination through the paper towel kit
- Practical use

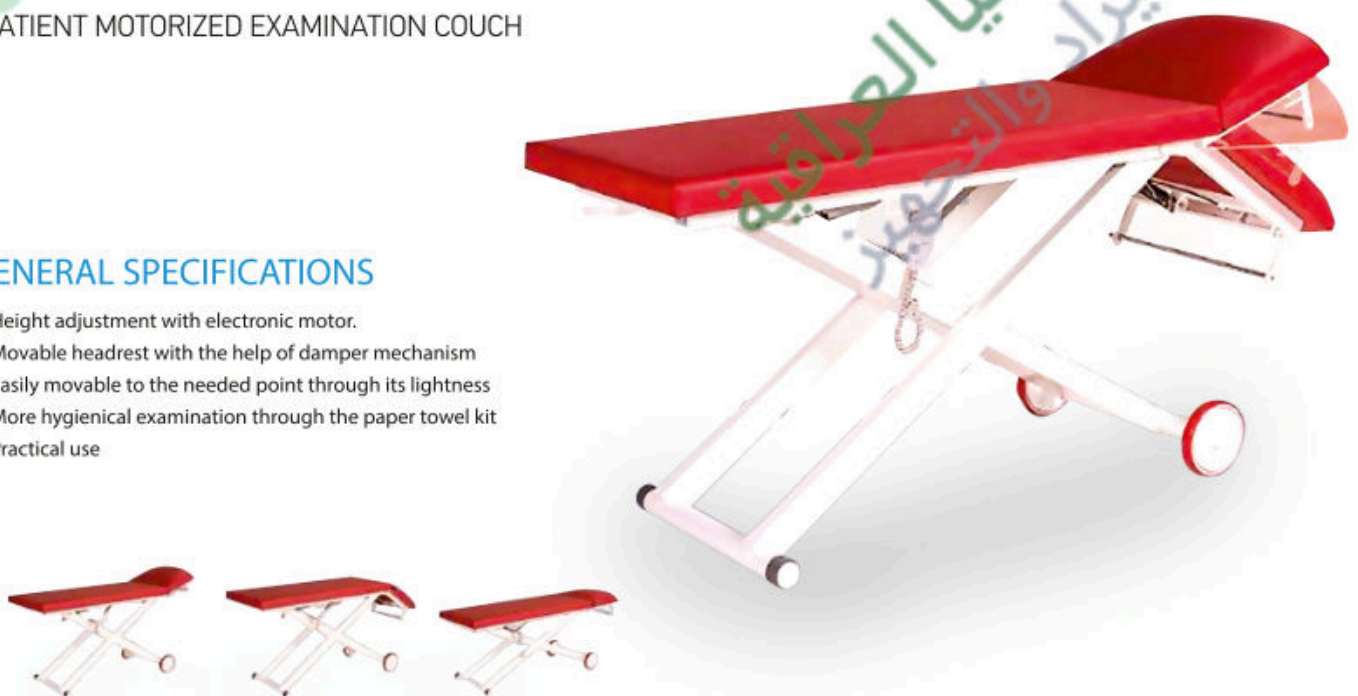

EX 02W

Wooden examination couch

GENERAL SPECIFICATIONS

- ADJUSTABLE BACK SIDE
- WOODEN BODY
- MASSIVE HORNBEAM STRUCTURE
- UPHOLSTERED LEATHER LAYING SURFACE



TECHNICAL SPECIFICATIONS

- Weight : 50 kg
- Safe Working Load : 170 kg

SC 01M

Metal screen

GENERAL SPECIFICATIONS

- METAL STRUCTURE
- FABRIC SCREEN
- 3 WINGS
- 2 WING WITH CASTORS



SC 01W

Wooden screen

GENERAL SPECIFICATIONS

- MADE FROM 1ST CLASS HEATED HORNBEAM WOOD
- MASSIVE STRUCTURE
- FABRIC SCREEN
- 2 WING WITH CASTORS
- FABRIC CURTAINS
- 3 WINGS



EX 03M

Metal examination couch

TECHNICAL SPECIFICATIONS

- Weight : 40 kg
- Safe Working Load : 170 kg



GENERAL SPECIFICATIONS

- ADJUSTABLE BACK SIDE
- FIXED METAL BODY
- ELECTROSTATIC PAINTED
- FOLDING FEET
- UPHOLSTERED LEATHER LAYING SURFACE



EX 03MF

Folding examination couch

TECHNICAL SPECIFICATIONS

- Weight : 40 kg
- Safe Working Load : 170 kg



GENERAL SPECIFICATIONS

- ADJUSTABLE BACK SIDE
- FIXED METAL BODY
- ELECTROSTATIC PAINTED
- FOLDING FEET
- UPHOLSTERED LEATHER LAYING SURFACE



TM723

Delivery chair with motor



GENERAL SPECIFICATIONS

LEG AND BACK MOVEMENTS ARE CONTROLLED BY 2 DC MOTORS.
HEIGHT ADJUSTMENT IS CONTROLLED BY 1 COLUMN MOTOR.
POSITIONS ARE CONTROLLED BY HAND REMOTE CONTROL.
2 BUMPERS ON THE 2 CORNERS OF THE BED.
HYDRAULIC SIDE RAILS MADE OF PP PLASTIC, EASILY CLEARABLE.
HEAD BOARD MADE OF PP PLASTIC, EASILY DEMONTABLE AND CLEARABLE.
2 IV POLE ADAPTORS ON BOTH SIDES OF THE BED.
Ø150 mm, 360° SWIVEL WHEELS WITH CENTRAL BREAK SYSTEM AND DIRECTIONAL LOCK
COLOUR OPTIONS AVAILABLE FOR SIDE RAILS.
(FOR COLOUR OPTIONS SEE ACCESSORIES PAGE)

TECHNICAL SPECIFICATIONS

Weight : 80 kg
Safe Working Load : 170 kg



TM 2087-3

GYNECOLOGICAL TABLE

- Modern Gynecological and Urological Tables, designed and manufactured in accordance with the inspection and intervention.
- Ergonomic structure and various accessories provide ease of use from inspection to birth.
- Easy to move the table with the foot control.
- Hand control is also available on request.
- Quiet and vibration-free motors give different positions to the table.
- Easily disassembled and adjustable accessory attachments

Motorized Gynecological and Urological Table

The up-and-down, back and sitting section movements of the table work with the electromechanical motor system. The engine control operates with foot pedal or hand control. The table is also produced as both foot and hand control. On the table; There are seating, back and slack parts.

Standard Accessories

Arm Support (Polyurethane)	2 pieces
Leg Support (Polyurethane)	2 pieces
Handgrip (Special)	2 pieces
Waste Collection Bathtub (Stainless)	1 pieces
Iv Holder (Stainless)	1 pieces
Waterproof and Bloodproof cushions	3 pieces
Table Brake (Fixing) System	2 pieces
Hand Control (Optional)	
Battery System (Optional)	

Technical Specifications

Horizontal Position Measurement	62x175 cm
Height Min-Max	70x95 cm
Operating Voltage	220V, 50 Hz
Net Table Weight	145 Kg
Patient Carrying Capacity	200 Kg
Stainless steel body and sub chassis which prevents liquid entry from outside	
Brake system that allows the table to be fixed at the desired place	



TM 2087-4

GYNECOLOGICAL TABLE

with 4 Motors Electrically adjustable height - backrest - trendelenburg - Legres

TECHNICAL DETAILS

• Seat Height	: 600 mm - 940 mm
• Table Length	: 2010mm (with foot extension)
• Table Width	: 640 mm
• Seat Section	: 640mm x 360 mm
• Back Section	: 640mm x 1000 mm
• Foot Extension	: 640mm x 600mm
• Rocker support section	: 850 mm (closed interval)
• Lifting Capacity	: 200 Kg
• Motor	: 4 pieces
• Command Module	: Foot switch

FUNCTIONAL DETAILS

- Back Section : 0° ~ +70°
- Trendelenburg / Reverse trendelenburg : -5° ~ +25°
- Foot Extension : Detachable
- Curved Legrest : Electrically adjustable upwards- downwards & left- right and detachable
- Knee crutches : Electrically adjustable upwards- downwards and detachable

Standart acessories

Foot Extension (1 pc), Curved Legrest (2 pcs), Knee crutches (2 pcs), Table covering (1 pc), Waste tray (1 pc), Paper roll holder (1 pc)

Packing Info

Net weight	: 150 Kg
Gross weight	: 175 Kg
Packing Dimensions	: 152x77x99cm



DIA

DIALYSIS CHAIR

with 4 Motors Electrically adjustable height – backrest – trendelenburg – legrest

TECHNICAL DETAILS

- Seat height : 550mm - 850mm
- Chair Length : 2130mm
- Chair Width : 700mm, (with Armrests: 1060mm)
- Headrest : 700mm x 300mm
- Seat Section : 700mm x 540mm
- Back Section : 700mm x 600mm
- Leg Section : 700mm x 620mm
- Foot support : 200mm x 650mm
- Command Module : Hand switch
- Motor : 4 pieces

FUNCTIONAL DETAILS

- Back Section : 0° ~ 70°
- Leg Section : 0° ~ 30°
- Trendelenburg / Reverse trendelenburg : -5° ~ 15°
- Headrest: Adjustable upwards- downwards 100mm
- Armrest : Adjustable upwards- downwards.
- Serum hanger: Can be use both left and right side
- Foot support: Adjustable upwards- downwards 250mm
- Foot support : 200mm x 650mm

Standart accessories

Serum hanger, Movable head cushion.

Packing Info

Net weight : 150 Kg
Gross weight : 175 Kg
Packing Dimensions : 152x77x99cm

Packing Details:

Net weight : 115 Kg
Gross weight: 145 Kg
Packing Dimensions : 209x73x80cm



EYE

EYE OPERATION TABLE

with 2 Motors Electrically adjustable height and trendelenburg

TECHNICAL DETAILS

- Seat Height : 600 mm - 900 mm
- Table Length : 2200mm
- Table Width : 550mm
- Table Base : 500mm x 980mm
- Head Section : 215mm x 235mm
- Shoulder Section : 480mm x 330mm
- Table base : 1000 mm x 650 mm
- Bed Section : 550mm x 1500 mm
- Lifting Capacity : 150 kg
- Motor : 2 Pieces
- Command Module : Foot switch

FUNCTIONAL DETAILS

- Back Section : Upwards : +20°, Flexible headpads bends all directions.
- Leg Section : 0° ~ 35°
- Trendelenburg : 0° ~ +25°
- Headrest : Adjustable upwards- downwards 100mm
- Armrest : Adjustable upwards- downwards.
- Serum hanger : Can be use both left and right side
- Foot support : Adjustable upwards- downwards 250mm
- Foot support : 200mm x 650mm

Standart Accessories:

Headrest frame (stainless steel), Anaesthetize frame (stainless steel), Rails & Armrests (2pcs)

Packing Details:

Net weight : 122 Kg
Gross weight: 147 Kg
Packing Dimensions : 209x73x80cm



OPT

UNIVERSAL EH-4F OPERATING TABLE



TECHNICAL DETAILS

• Min. high	: 710 mm x 1010 mm	• Leg section(left, piston)	: 255 mm x 710 mm
• Max. high	: 760 mm x 1060 mm	• Power	: 230V 50 Hz
• Table width	: 600 mm x 2150 mm	• Power charge voltage	: 24 V DC
• Head section	: 225 mm x 355 mm	• Remote control voltage	: 5V DC
• Seat Section	: 700mm x 540 mm	• Battery voltage	: 220V AC, 24V DC 10A
• Back Section	: 530 mm x 625 mm	• Battery capacity	: 7Ah, 12 V DC - 45 minute.
• Seat Section	: 530 mm x 530 mm	• Lifting capacity	: 300 kg
• Leg section (right, piston)	: 255 mm x 710 mm		



Reverse Trendelenburg 250



Leg Rest 900



Sled 300 mm



Height
760 mm - 1060 mm



Lifiable foot system



Nephron surgery position 125°



Left foot (side) 90°



Lateral +250/-250

CH 01

Small single companion chair



GONDOL



G 805



G 805

ANTARES



4060



4062



4064

MDC-01

GENERAL SPECIFICATIONS

- DRUG PREPARATION TRAY
- DUSTBIN
- WASTE CONTAINER
- DRAWERS WITH CENTRAL LOCK
- DIMENSION: 68 x 52 x 96h



MCC-01

GENERAL SPECIFICATIONS

- CPR BOARD
- DEFIBRILLATOR STAND
- OXYGEN TUBE PLACE
- ABS TOP AND BOTTOM SURFACE
- CROSS BRAKE WHEELS
- WASTE CONTAINER
- SERUM IV
- DRAWERS WITH CENTRAL LOCK
- DIMENSION: 68 x 52 x 96h




CC 01

Emergency Trolley / Crash Cart

GENERAL SPECIFICATIONS

- Serum Hanger
- Defibrillator and Monitor Stand
- Mechanical Breaking Lock
- Nurse Writing Table
- Drawers
- Rack
- Protective Bumper
- Casters



AT 01

Therapy, Medication & Anesthesia Trolley

GENERAL SPECIFICATIONS

- Serum Hanger
- Tilting Box Cover
- Key With Lock Mechanism
- Nurse Writing Table
- Drawers
- Waste Bin
- Protective Bumper



DC 01

Dressing Cart

GENERAL SPECIFICATIONS

- Mechanical Breaking Lock
- Nurse Writing Table
- Drawers
- Rack
- Chemical Waste Section



DDT 01

Drug Dispensing Trolley

GENERAL SPECIFICATIONS

- Nurse Writing Table
- Key with Lock Mechanism
- Group of a 12-Block Drawer
- Group of a 8-Block Drawer
- Drawers
- Protective Bumper



T2103

Laundry Trolley



3917

Laundry Trolley



07104

Cleaning Trolley



INTENSIVE CARE UNIT



MATERIAL

- Aluminium Chanel
- Color options from RAL Catalog
- Single Intensive Care Unit; 10x44,5x180 cm

BED HEAD UNIT



MATERIAL

- Aluminium Chanel
- Color options from RAL Catalog
- Single Bedhead Unit; 11x25,5x150 cm
- Double Bed Head Unit; 11x25,5x3,20 cm



WS 01

Knee Operated Hand Washing Sink

Dimensions (LxWxH mm)

500x 390 x 230 - w/Facet, w/Single Inlet

500 x 390 x 230 - w/Faucet, Hot-Cold

500 x 390 x 230 Musluksuz / w/o Faucet



WS 02

Knee Operated Hand Washing Sink-Wall

Dimensions (LxWxH mm)

400 x 330 x 230 - w/Faucet, w/Single Inlet

400 x 330 x 230 - w/Faucet, Hot-Cold

400 x 330 x 230 - w/Faucet



WS 03

Basin Set - Auto. Water & Soap Flow

Dimensions (LxWxH mm)

700 x 600 x 850 Single

1400 x 600 x 850 Double

1900 x 700 x 850 Triple



WS 04

Plated Tool Washing Basin

Dimensions (LxWxH mm)

1400 x 600 x 840/1080



WS 05

Sink Unit With Single Drainer

Sink Unit With Single Drainer

1400 x 600 x 850



2170

Mayo Table - Hydraulic, w/Tray

Dimensions (LxWxH mm)

510 x 520 x 800/1190



Instrument Washink Sinks

Dimensions (LxWxH mm)

2400 x 800 x 850

WS 06



2170-M

Mayo Table - Mechanic, w/Tray

Dimensions (LxWxH mm)

400 x 600 x 780/1200




WS 07

Instrument Washink Sinks

Dimensions (LxWxH mm)

2400 x 800 x 850

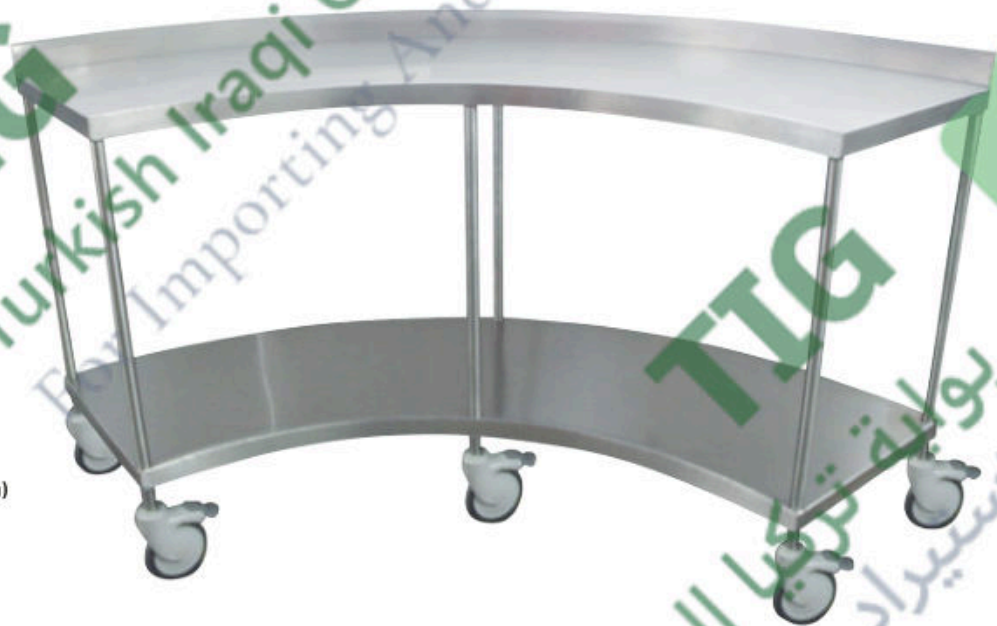

FT 01

Falcate Table

Dimensions (LxWxH mm)

1700 x 450 x 900



FT 02

Linen Folding Table with Light

Dimensions (LxWxH mm)

1400 x 600 x 850



WT

Working Table w/Bottom Shelf Backing

Dimensions (LxWxH mm)

1200 x 600 x 850

1200 x 700 x 850 Mobil / Mobile



PT 01

Packing Table

Dimensions (LxWxH mm)

1800 x 700 x 850



WB 01
Working Bench - Backed, w/Drawers

Dimensions (LxWxHmm)
1200 x 650 x 850



ST 01
Slipper Trolley

Dimensions (LxWxH mm)
1000 x 500 x 1800



DPT 01
Drug Preparation Trolley

Ref **Dimensions (LxWxH mm)**
MXP 02 018 40 x 50 x 95



T 01
Trolley w/Drawer

Ref **Dimensions (LxWxH mm)**
MXP 03 001 750 x 550 x 900



BS 01
Double Bowl Stand

Dimensions (LxWxH mm)
610 x 550 x 780/1110



T 02
Surgical Instruments Trolley

Dimensions (LxWxH mm)
400 x 900 x 900



SD 02
Sterilized Product Trolley

Dimensions (LxWxHmm)
800 x 600 x 850



T 03
Instrument Trolley

Ref **Dimensions (LxWxH mm)**
MXP 03 003 550 x 800 x 850 İki Katlı / Two Tier



T 04
Trolley w/Drawer

Ref **Dimensions (LxWxH mm)**
MXP 03 002 400 x 600 x 850



T 05
Drug / Anaesthesia Trolley

Ref **Dimensions (LxWxH mm)**
MXP 03 005 500 x 700 x 1000



P 01
Pharmacy / Instrument Cabinet

Ref **Dimensions (LxWxH mm)**
MXP 04 001 900 x 400 x 850/1800



PC 02
Pharmacy Cabinet

Dimensions (LxWxH mm)
900 x 420 x 1800



EC 01
Endoscopy Cabinet

Dimensions (LxWxH mm)
700 x 400 x 2100



CB 01 W
Cap / Bonnet / Mask Cupboard - Wall

Dimensions (LxWxH mm)
250 x 500 x 800



CB 02
Cap / Bonnet / Mask Cupboard

Dimensions (LxWxH mm)
600 x 250 x 1200



STSH 01
Storage Shelves w/Wire Grid

Dimensions (LxWxH mm)
460 x 1220 x 1830
460 x 1520 x 1830



STSH 02
Storage Shelves w/Wire Grid

Dimensions (LxWxH mm)
460 x 1220 x 1830
460 x 1520 x 1830



LT 01
Laundry Trolley - Double

Dimensions (LxWxH mm)
900 x 450 x 1100



MBS 01
Operating Room Mobile Bucket Stand

Dimensions (LxWxHmm)

40 Lt

32 Lt



MBS 02
Operating Room Mobile Waste Bin

Dimensions (LxWxHmm)

20 Lt

36 Lt



S 01 SS
One Step Stool - Stainless Steel

Dimensions (LxWxHmm)

600 x 300 x 200



S 02 SS
Double Step Stool - Stainless Steel

Dimensions (LxWxHmm)

410 x 640 x 435



S 04 AL
One Step Stool - Aluminum

Dimensions (LxWxHmm)

600 x 300 x 200



S 03 AL
Double Step Stool - Aluminum

Dimensions (LxWxHmm)

410 x 640 x 435



SS-IV
I.V Pole



AL-CT
Mobile device trolley



AL-CT2
Mobile device trolley