


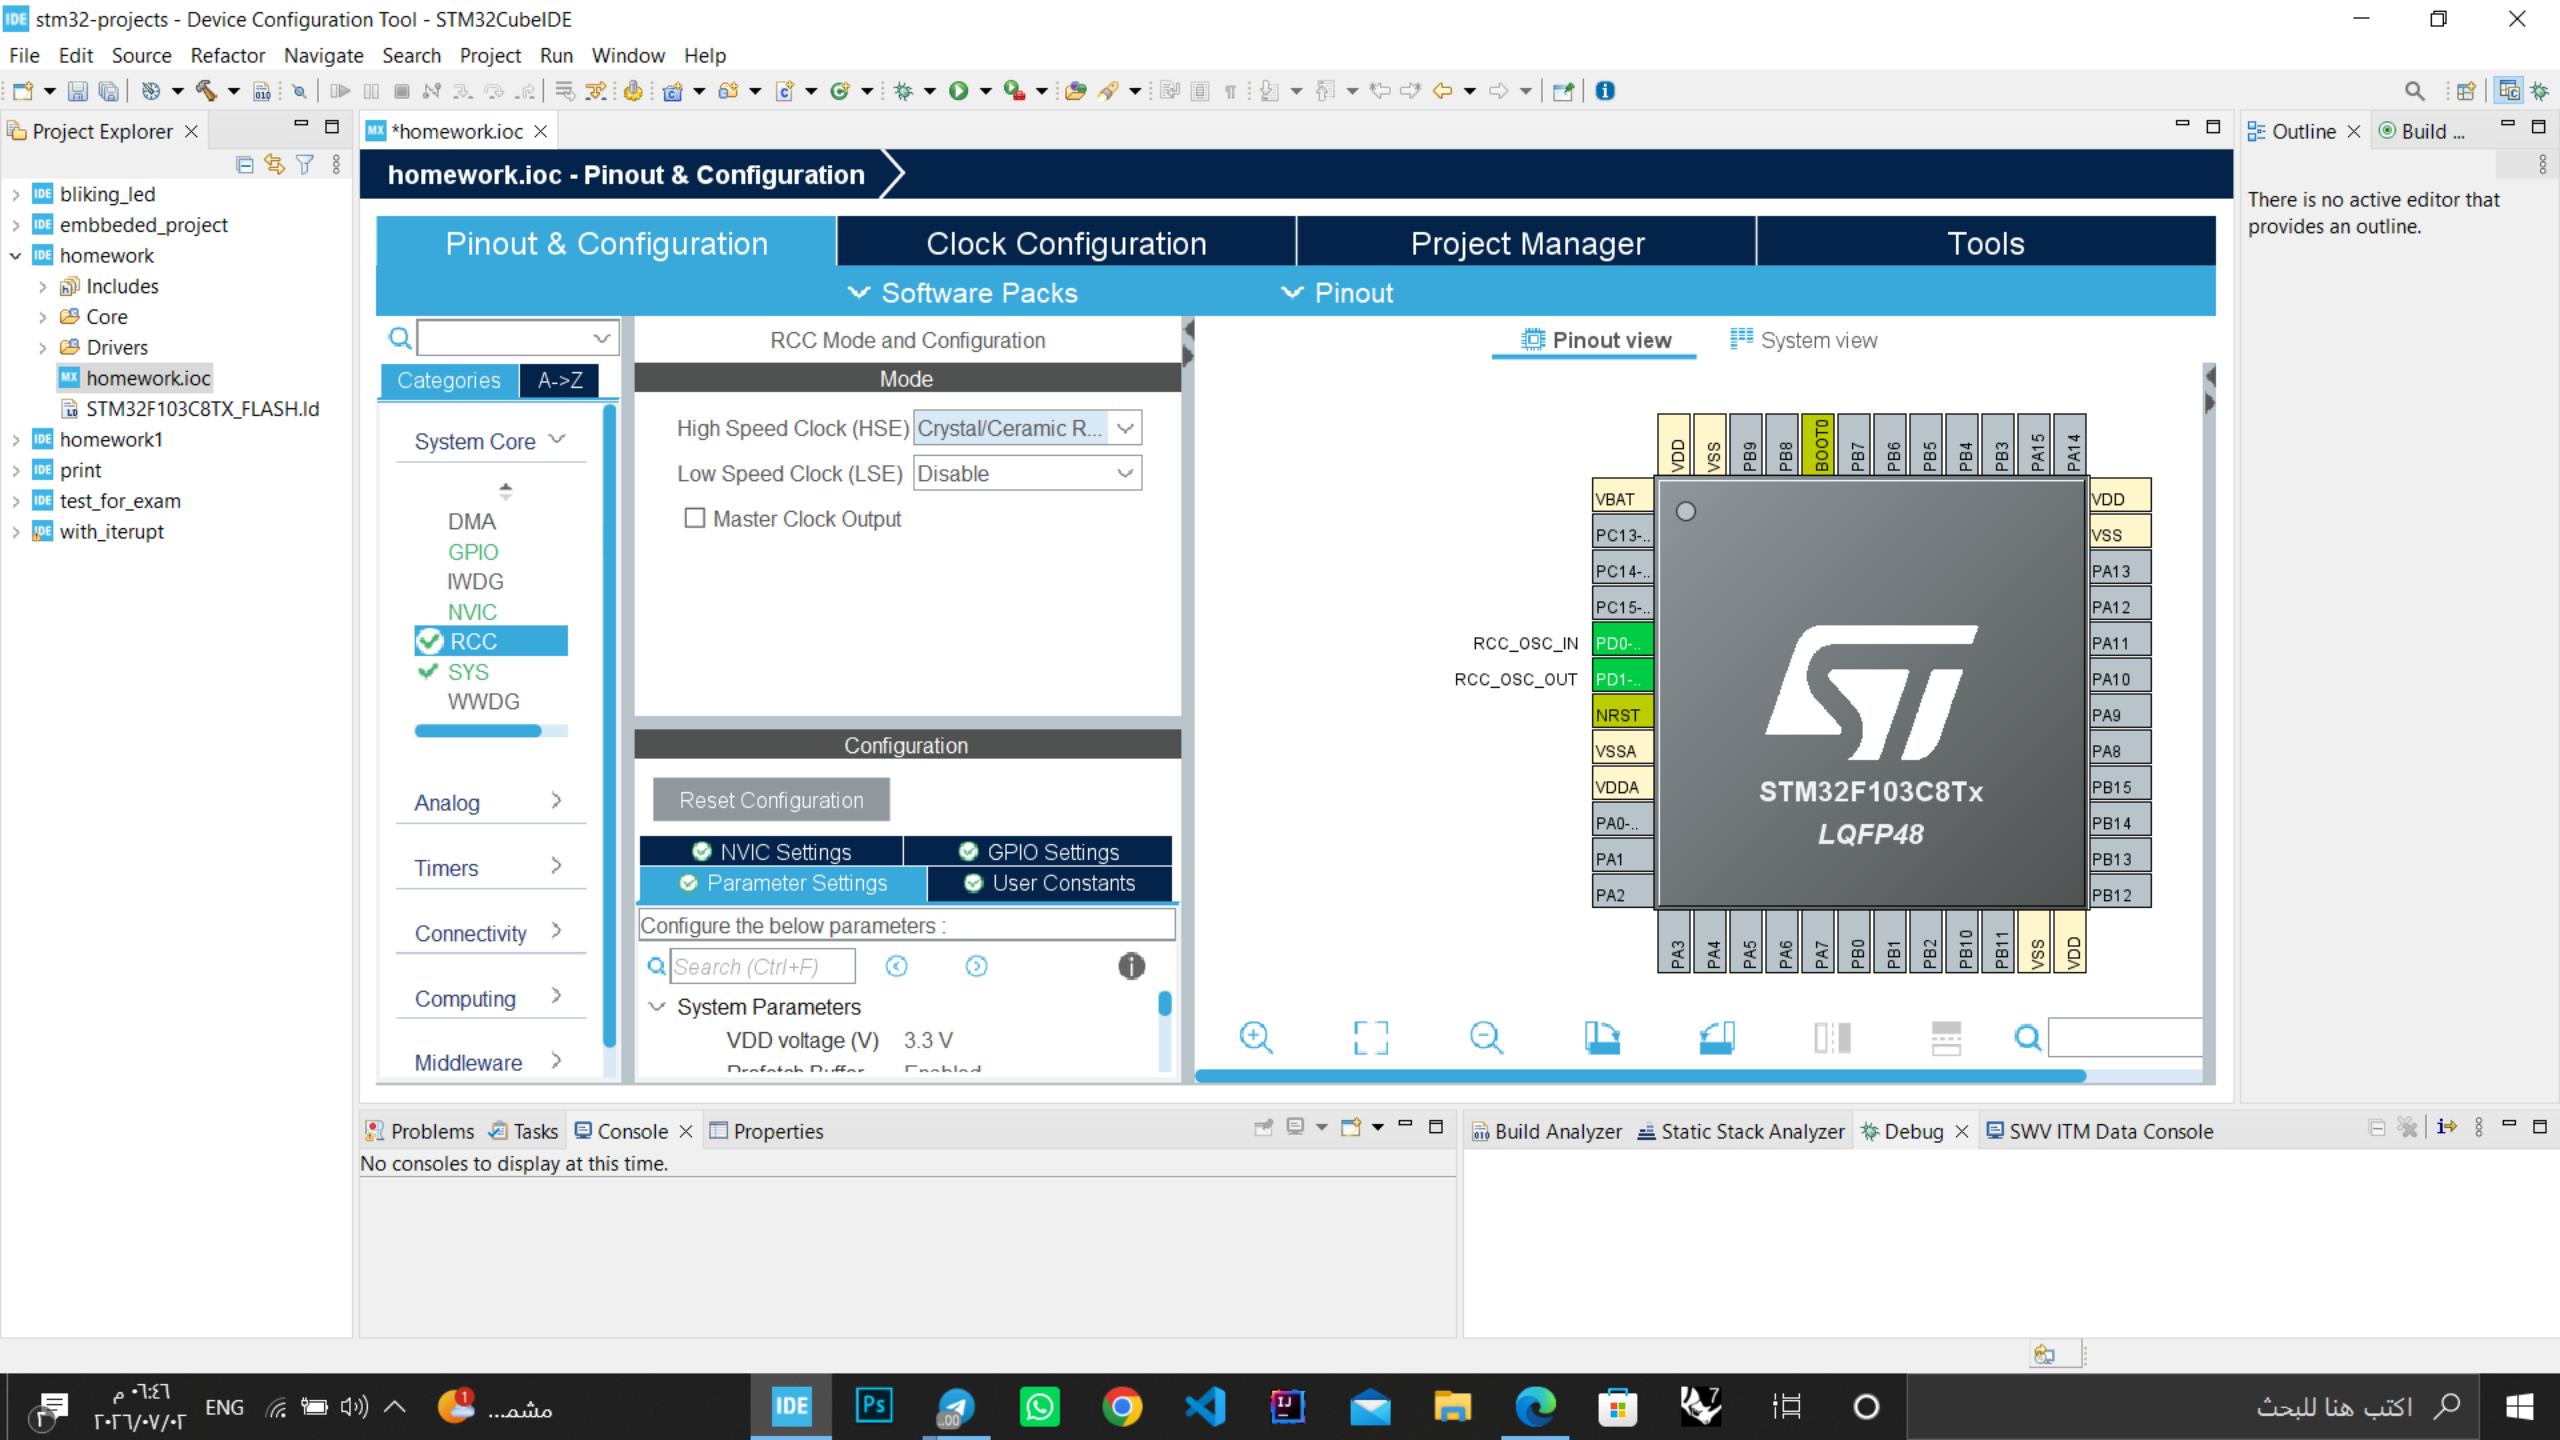

stm32-projects - Device Configuration Tool - STM32CubeIDE

File Edit Source Refactor Navigate Search Project Run Window Help

Project Explorer

blinking_led

embedded_project

homework

- Includes
- Core
- Drivers
 - homework.ioc
 - STM32F103C8TX_FLASH.Id

homework1

print

test_for_exam

with_interrupt

homework.ioc - Clock Configuration


Pinout & Configuration

Clock Configuration

Project Manager

Tools

Resolve Clock Issues

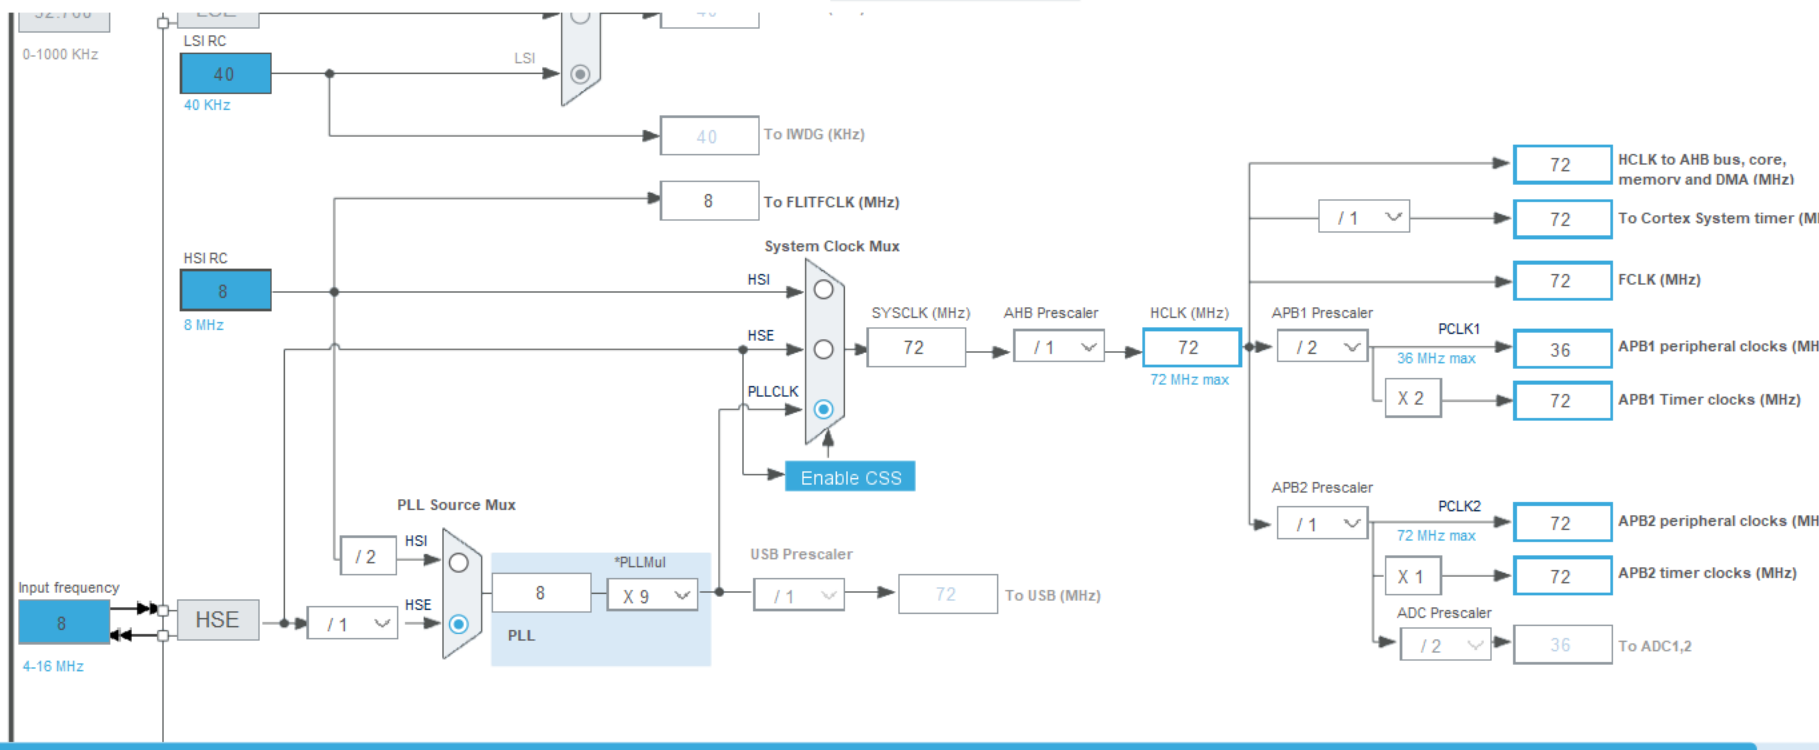

The diagram illustrates the clock configuration for the STM32F103C8TX. It shows the flow from input frequencies (LSI RC at 40 KHz, HSI RC at 8 MHz, and an external HSE at 4-16 MHz) through various dividers and multiplexers to the final system and peripheral clocks. Key components include the System Clock Mux, PLL Source Mux, and PLL (PLL_MUL). The final outputs are HCLK (72 MHz), APB1 and APB2 peripheral clocks (36 MHz and 72 MHz), and USB (72 MHz). A button labeled 'Enable CSS' is also present.

Outline

Build ...

There is no active editor that provides an outline.

Problems Tasks Console Properties

No consoles to display at this time.

Build Analyzer Static Stack Analyzer Debug SWV ITM Data Console

IDE Ps

مشتم...

اكتب هنا للبحث

stm32-projects - Device Configuration Tool - STM32CubeIDE

File Edit Source Refactor Navigate Search Project Run Window Help

Project Explorer ×

- blinking_led
- embedded_project
- homework
 - Includes
 - Core
 - Drivers
 - homework.ioc
 - STM32F103C8TX_FLASH.Id
- homework1
- print
- test_for_exam
- with_iterupt

*homework.ioc ×

homework.ioc - Pinout & Configuration

Pinout & Configuration

Categories A->Z

- System Core >
- Analog >
- Timers
 - RTC
 - TIM1
 - TIM2**
 - TIM3
 - TIM4
- Connectivity >
- Computing >
- Middleware >

TIM2 Mode and Configuration

Mode

Slave Mode

Trigger Source

Clock Source

Channel1

Channel2

Channel3

Configuration

Reset Configuration

☒ DMA Settings ☒ GPIO Settings

☒ User Constants ☒ NVIC Settings

☒ Parameter Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC) ... 71

Counter Mode Up

Counter Period (...) 999

Internal Clock Divi... No Division

auto_reload_presc Disable

Pinout view

Pinout

STM32F103C8Tx LQFP48

Pinout view showing the package pins and their connections. The package is a 48-pin LQFP48. The pins are labeled as follows:

- Top row: VDD, VSS, PB9, PB8, **BOOT0**, PB7, PB6, PB5, PB4, PB3, PA15, PA14
- Left side: VBAT, PC13-..., PC14-..., PC15-..., RCC_OSC_IN (PD0-...), RCC_OSC_OUT (PD1-...), NRST, VSSA, VDDA, TIM2_CH1 (PA0-...), PA1, PA2
- Bottom row: PA3, PA4, PA5, PA6, PA7, PB0, PB1, PB2, PB10, PB11, VSS, VDD
- Right side: VDD, VSS, PA13, PA12, PA11, PA10, PA9, PA8, PB15, PB14, PB13, PB12

homework.ioc - Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

▼ Pinout

GPIO Mode and Configuration

Categories A->Z

System Core

DMA

GPIO

IWDG

NVIC

✓ RCC

✓ SYS

WWDG

Analog >

Timers >

Connectivity >

Computing >

Middleware >

Configuration

Group By Peripherals

 GPIO
  I2C
  RCC
  TIM

Search Signals

Search (Ctrl+F)

☐ Show only Modified Pins

Pin ...	Signal o...	GPIO ou...	GPIO m...	GPIO Pu...	Maximu...	User La...	Modified
PA3	n/a	n/a	Input mo...	Pull-up	n/a		✓
PA4	n/a	n/a	Input mo...	Pull-up	n/a		✓
PA5	n/a	n/a	Input mo...	Pull-up	n/a		✓

PA5 Configuration :


GPIO mode Input mode

GPIO Pull-up/Pull-down Pull-up

User Label

 Pinout view

 System view

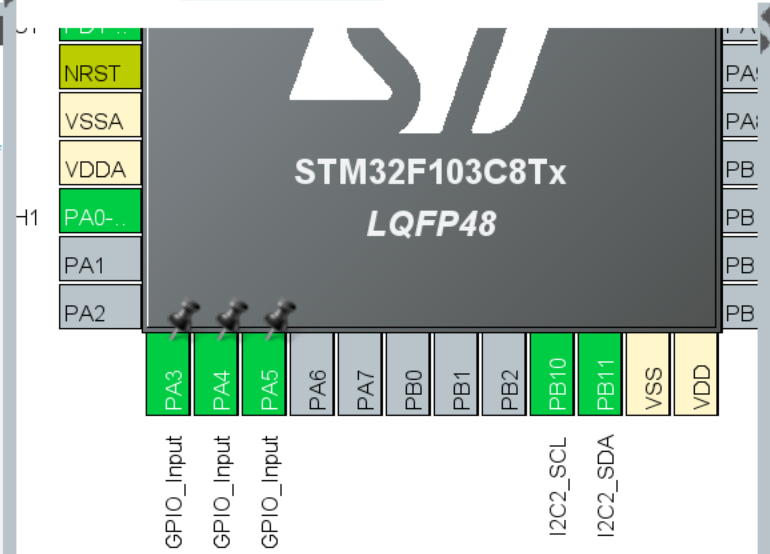


There is no active editor that provides an outline.

Problems Tasks Console × Properties

No consoles to display at this time.

Build Analyzer Static Stack Analyzer Debug × SWV ITM Data Console

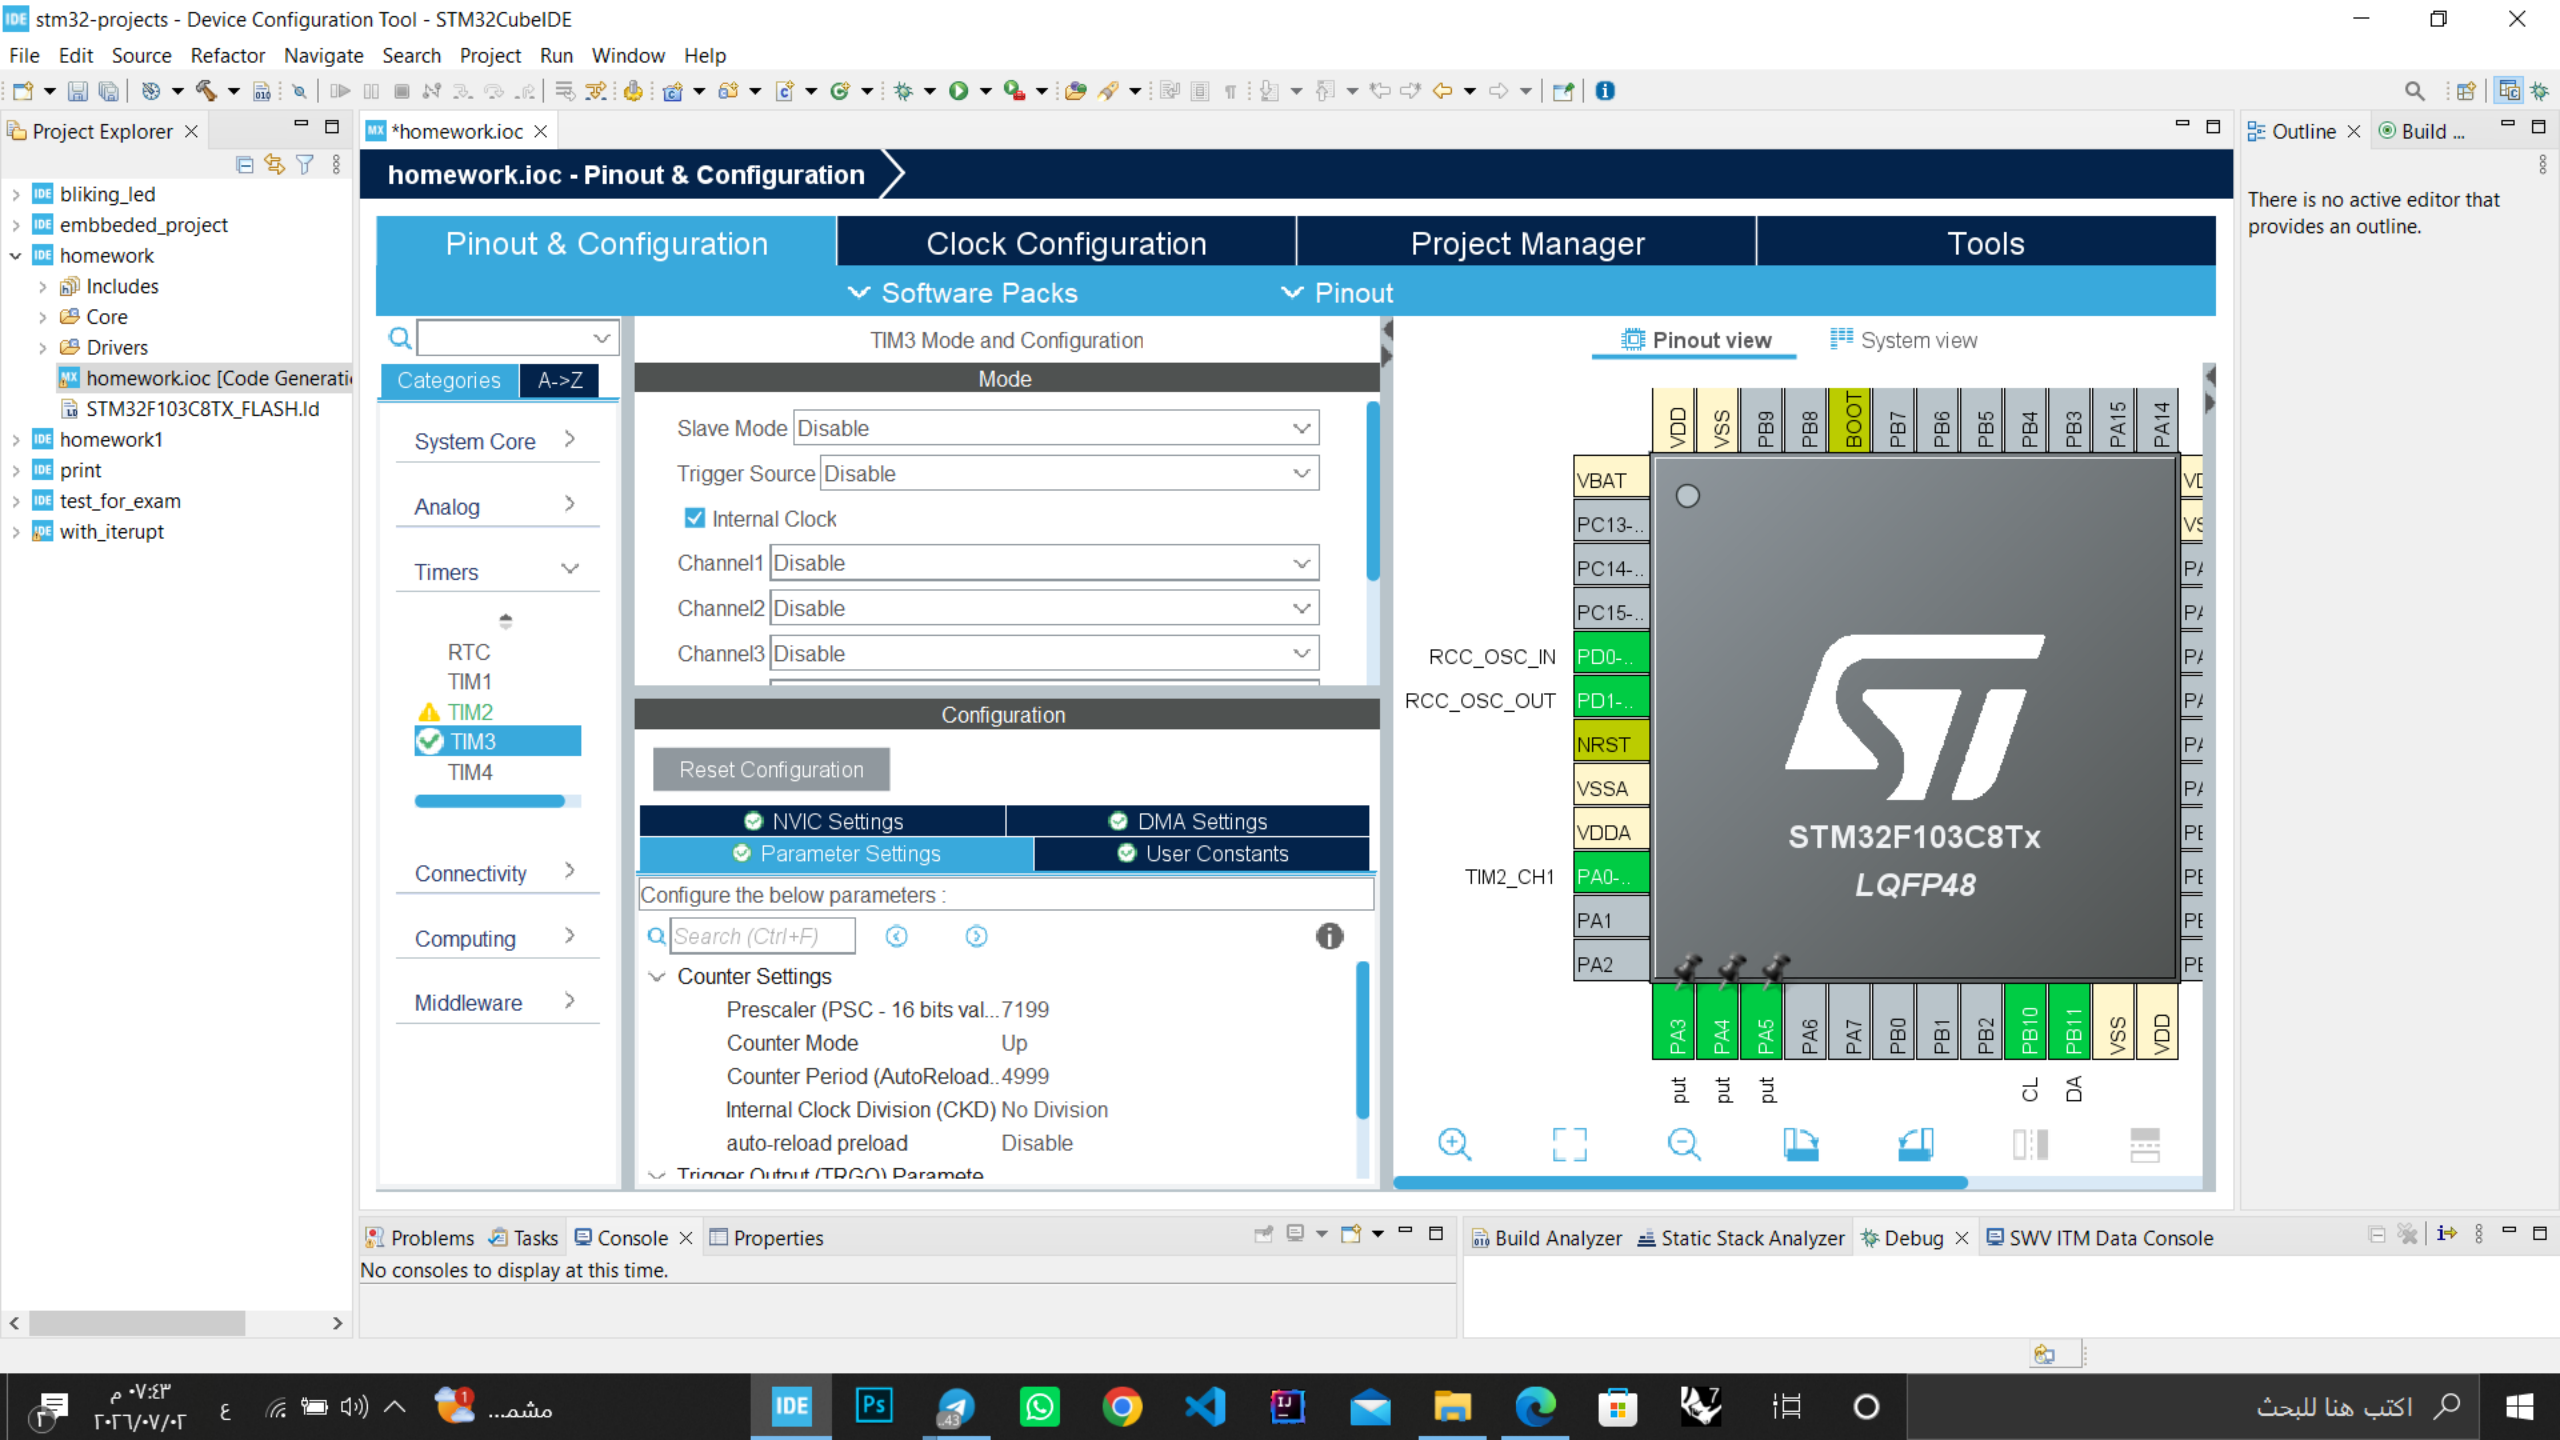

stm32-projects - Device Configuration Tool - STM32CubeIDE

File Edit Source Refactor Navigate Search Project Run Window Help

Project Explorer

blinking_led

embedded_project

homework

- Includes
- Core
- Drivers
- homework.ioc [Code Generation]
- STM32F103C8TX_FLASH.Id

homework1

print

test_for_exam

with_interrupt

homework.ioc - Pinout & Configuration

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search

Categories

A->Z

System Core

- DMA
- GPIO
- IWDG
- NVIC
- RCC
- SYS
- WWDG

Analog

Timers

Connectivity

Computing

Middleware

NVIC Mode and Configuration

Configuration

NVIC

- Code generation

Priority Group 4 bit...

Sort by Preemption Priority and Sub Priority

Search

Show available interrupts

NVIC Interrupt Table		Enabled	Pr
Non maskable interrupt		☒	0
Hard fault interrupt		☒	0
Memory management fault		☒	0
Prefetch fault, memory access fault		☒	0
Undefined instruction or illegal state		☒	0
System service call via SWI instruction		☒	0
Debug monitor		☒	0
Pendable request for system service		☒	0
Time base: System tick timer		☒	15
PVD interrupt through EXTI line 16		☐	0
Flash global interrupt		☐	0
RCC global interrupt		☐	0
TIM2 global interrupt		☐	0
TIM3 global interrupt		☒	0
I2C2 event interrupt		☐	0
I2C2 error interrupt		☐	0

Pinout view

System view

RCC_OSC_IN

RCC_OSC_OUT

TIM2_CH1

put

put

put

CL

DA

STM32F103C8Tx

LQFP48

Outline

Build ...

There is no active editor that provides an outline.

Problems

Tasks

Console

Properties

No consoles to display at this time.

Build Analyzer

Static Stack Analyzer

Debug

SWV ITM Data Console

اكتب هنا للبحث