

Oyster (Retail)

PRODUCT CODE
OYSTA30N59AGR



Description

Waterproof surface profile with opal diffuser, especially anti-glare, with UV protection.

Quick connection system and click anchoring for easy installation without opening.




IP65
EXT




IP20
INT



Product features

Socket:	LED	Lumen Flux:	3.500 lm
Output:	≈ 30W / >3000lm	E. Consumption:	31W
Control:	No Dimmable	Efficiency:	113 lm/W
Colour	5000K	Current:	350 mA
Temperature:		Voltage:	230V
Beam Angle:	>90°	Life time:	No Data
Complements:	Ice Diffuser	McAdam CDM:	C3
Finish:		CRI:	>80
		UGR:	<25
		Driver:	Included

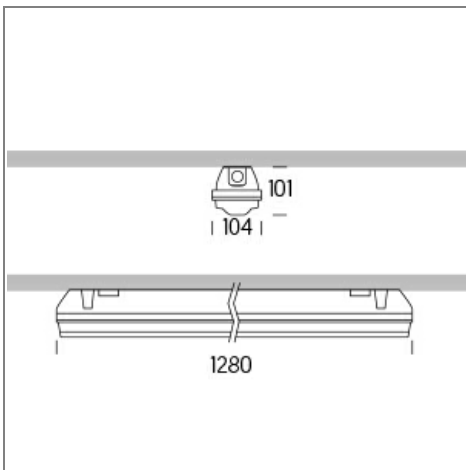

Photometric Data

□



+34 96 225 90 20
onoklighting.com



Onok Luz Técnica S.L. reserves its right to change technical specifications of its products. These changes will allow the continuous product improvement and will also ensure compliance with the legislation at all times.

Product manufactured in
compliance with:

EN 60598 EN 62471 EN 55015

EN 62031 EN 62493 EN 61000

Date: 03/12/2021