




Pipe ASME B36.10M BE S2 -46C S-30 ASTM A 671 GR. CC 65 CLASS 22 LOW TEMP. E.F.W. ELbow 90 D LR ASME B16.9 BW S-30 ASTM A 20 20 420 GR. WPL6 Wrought W

ITEM CODE QTY 57.4M 35550

1246

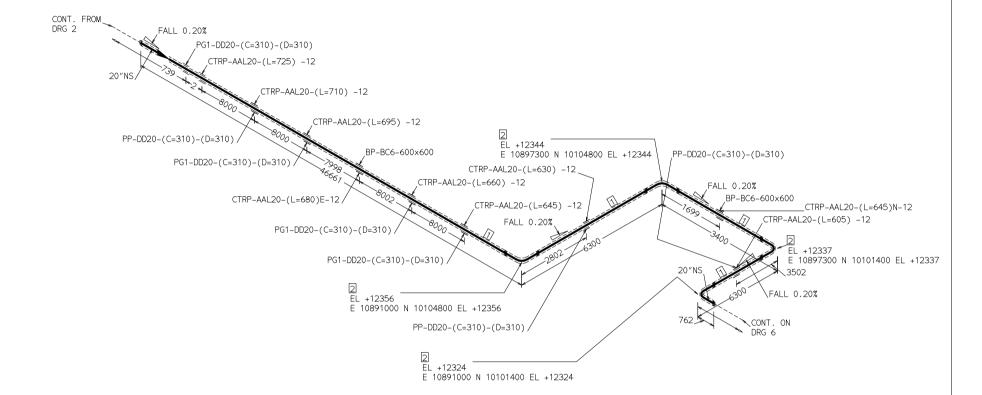

PHASE 14 CONSORTIUM **APPROVED FOR** CONSTRUCTION

ALL CONTROL VALVES, SAFETY VALVES, STRAINERS, SPECIAL PARTS, INSTRUMENT ITEMS SHOULD BE CHECKED WITH LAST REVISION OF VENDOR DRAWING (ACTUAL DIMENSION) BEFORE ANY SPOOL FABRICATION ACTIVITIES.

NOTE	CONDITION		DESIGN		OPERATING								
2- ISOMETRIC DRAWINGS FOR 1 1/2" AND SMALLER PIPINGS ARE JUST FOR INFORMATION. PIPING ROUTING, DIMENSIONS AND ELEVATIONS TO BE CHECKED BY CONSTRUCTION CONTRACTOR BEFORE INSTALLATION. 3- FOR 1 1/2" AND SMALLER, SUPPORTS TO BE SELECTED BY CONSTRUCTION CONTRACTOR EXCEPT AS NOTED. 4- BEFORE PRE-FABRICATION CHECK ACTUAL SIZE OF SPECIAL ITEMS.	PRESS. (barg)		47.4		21.3								
	TEMP.(°C)		55		-								
	TEST FLUID: H		PRESS. TEST(barg): 71.1			D4	26.Jun.19	APPROVED FOR CONSTRUCTION	IPMI	A.KH.	H.L.	A.D.	P.T.B.
	INSULATION TYPE:C		INSULATION T		тк.: 70	D3	19.11.18	APPROVED FOR CONSTRUCTION	IPMI	T.R.	H.L.	A.D.	P.T.B.
	PAINT CODE: 3		HEAT TRANSFE		ER CEMENT:-	D2	04.10.14	APPROVED FOR CONSTRUCTION	IPMI	F.Y.	S.M	M.F	P.T.B.
	STRESS ANALYSIS: 3			DENSITY(kg/	m³):587.9	D1	14.12.11	APPROVE FOR CONSTRUCTION	IPMI	Z.Z	A.D	M.F	Р.Т.В
	TRACING	STEAM TRACING	QTY. TRACIN	S SIZE NDT:10%RT		DO	20.10.11	ISSUED FOR APPROVAL	IPMI	Z.Z	A.D	M.F	Р.Т.В
		_	-	PWHT:	REV		. DATE	DESCRIPTION	ORIG.	PREP.	CHKD.	APPD.	CONT.
		ELEC. TRACING	YES 📗 1	O PHASE	: L	REF.P&ID DWG.No.:14-147-0030-0102							

SOUTH PARS GAS FIELD DEVELOPMENT

ORIGINATOR

20"-L.147.10012-D21-C

DWG-14-147-1330-2001-I

DOCUMENT No.:









ISO DRAWING No.:



PHASE 14 **TOMBAK ONSHORE FACILITIES DETAIL DESIGN**



PROJECT No.: POGC-653-89-35

LINE CLASS: D21 147 ORG. ID.: REV.: SHT. No.: 3 L.147.10012 D4 5 /10