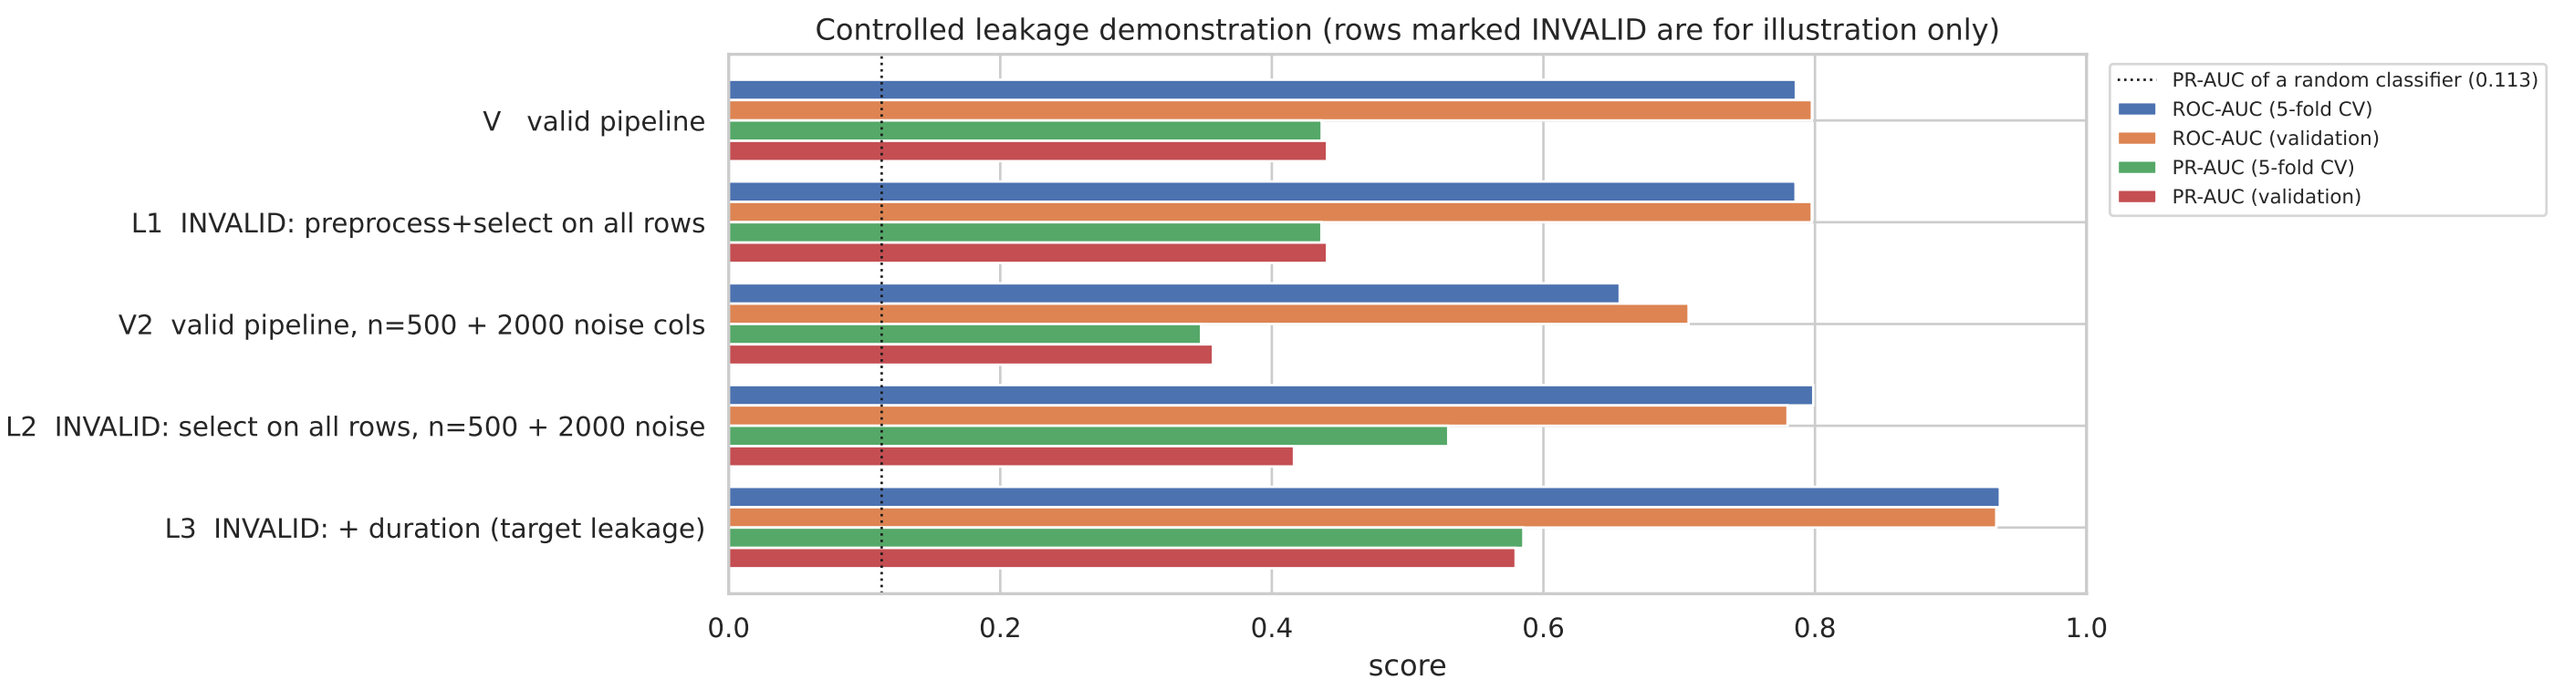
Controlled leakage demonstration (rows marked INVALID are for illustration only)
V valid pipeline
L1 INVALID: preprocess+select on all rows
V2 valid pipeline, n=500 + 2000 noise cols
L2 INVALID: select on all rows, n=500 + 2000 noise
L3 INVALID: + duration (target leakage)
PR-AUC of a random classifier (0.113)
ROC-AUC (5-fold CV)
ROC-AUC (validation)
PR-AUC (5-fold CV)
PR-AUC (validation)
0.0
0.2
0.4
0.6
0.8
1.0
score