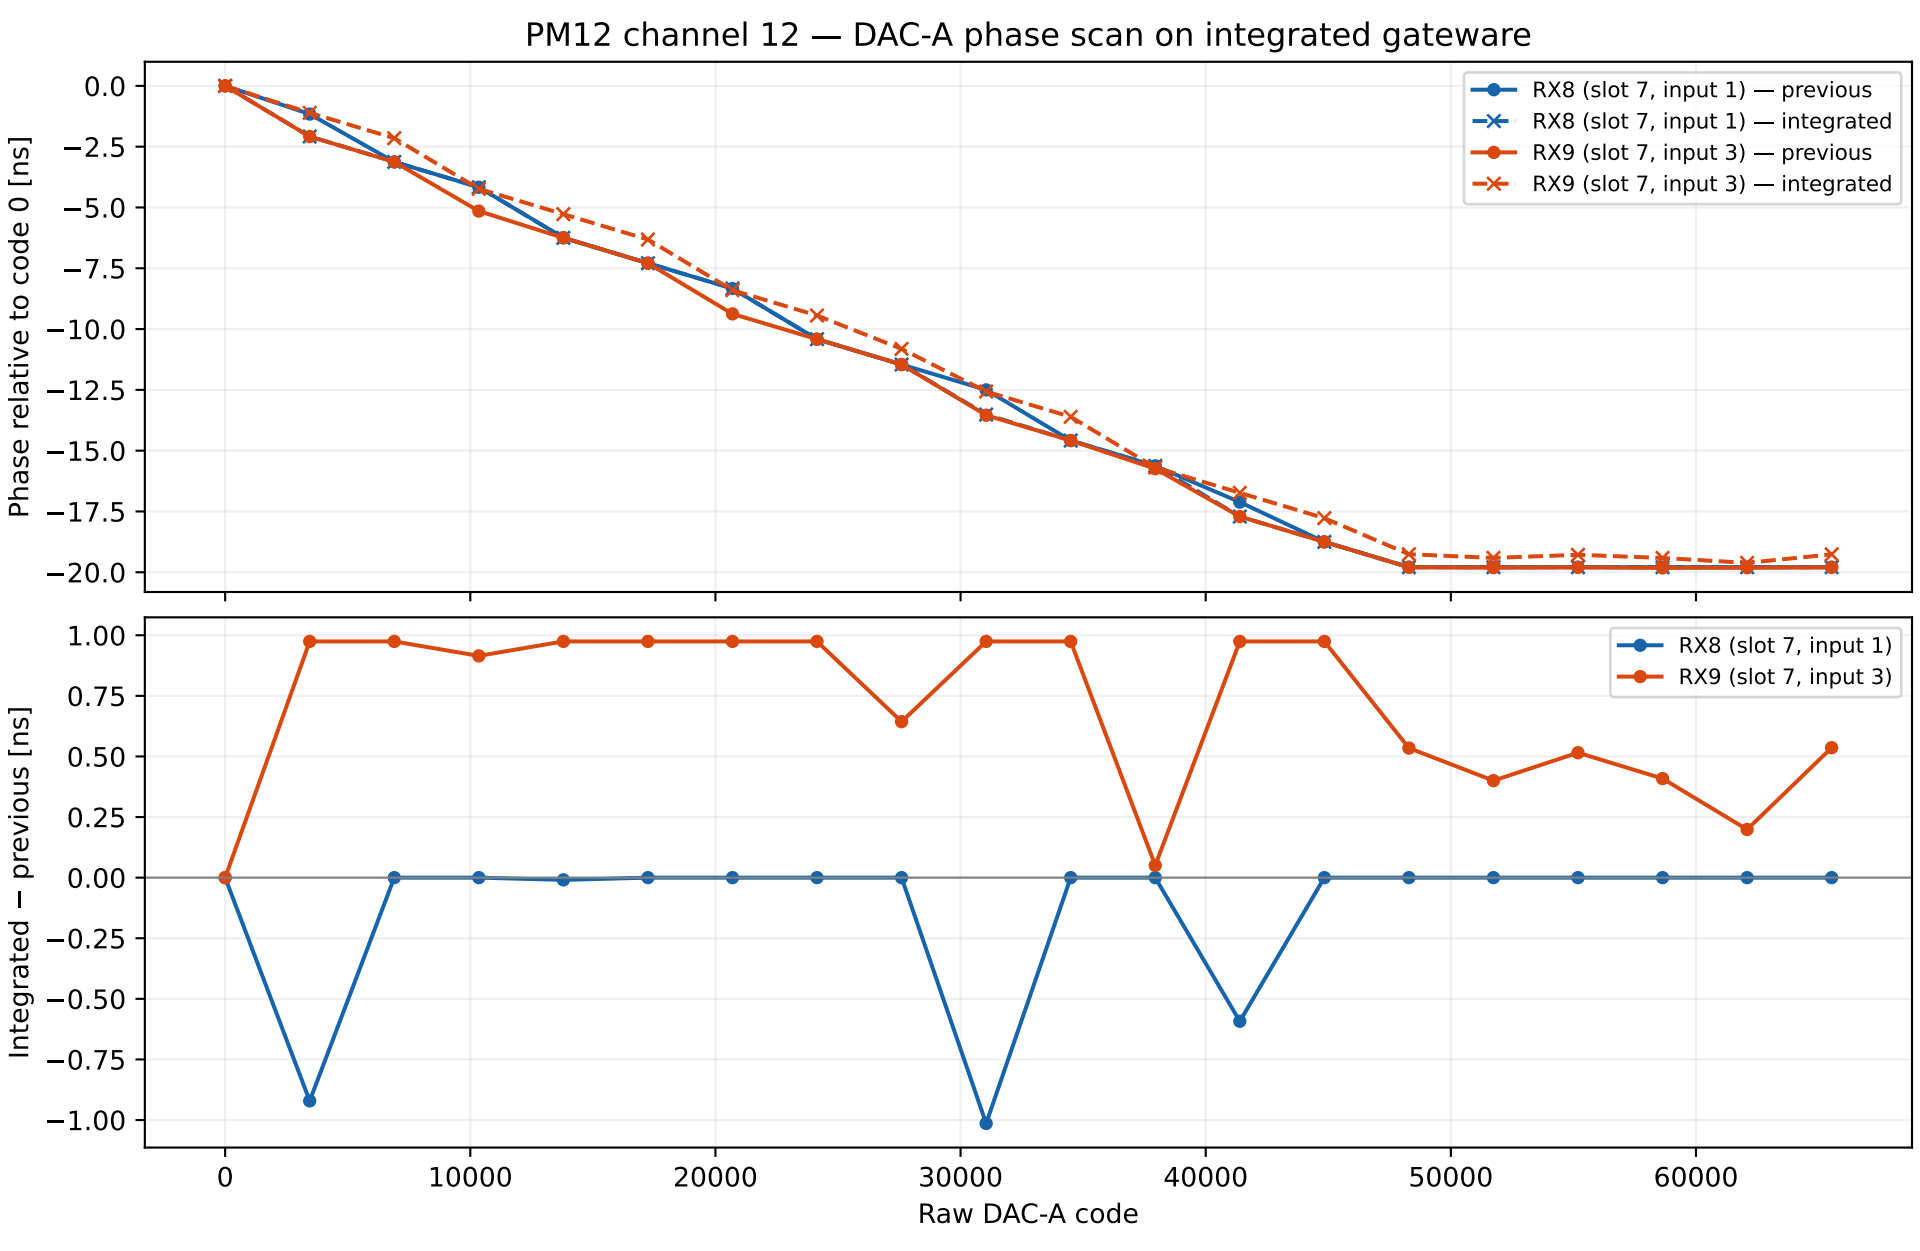

20 MHz complementary gate outputs; 20 DAC settings; 4095 x8 words per input and point.
Nominal 960 MS/s time scale, sampled centroid; no calibrated absolute phase or delay accuracy.