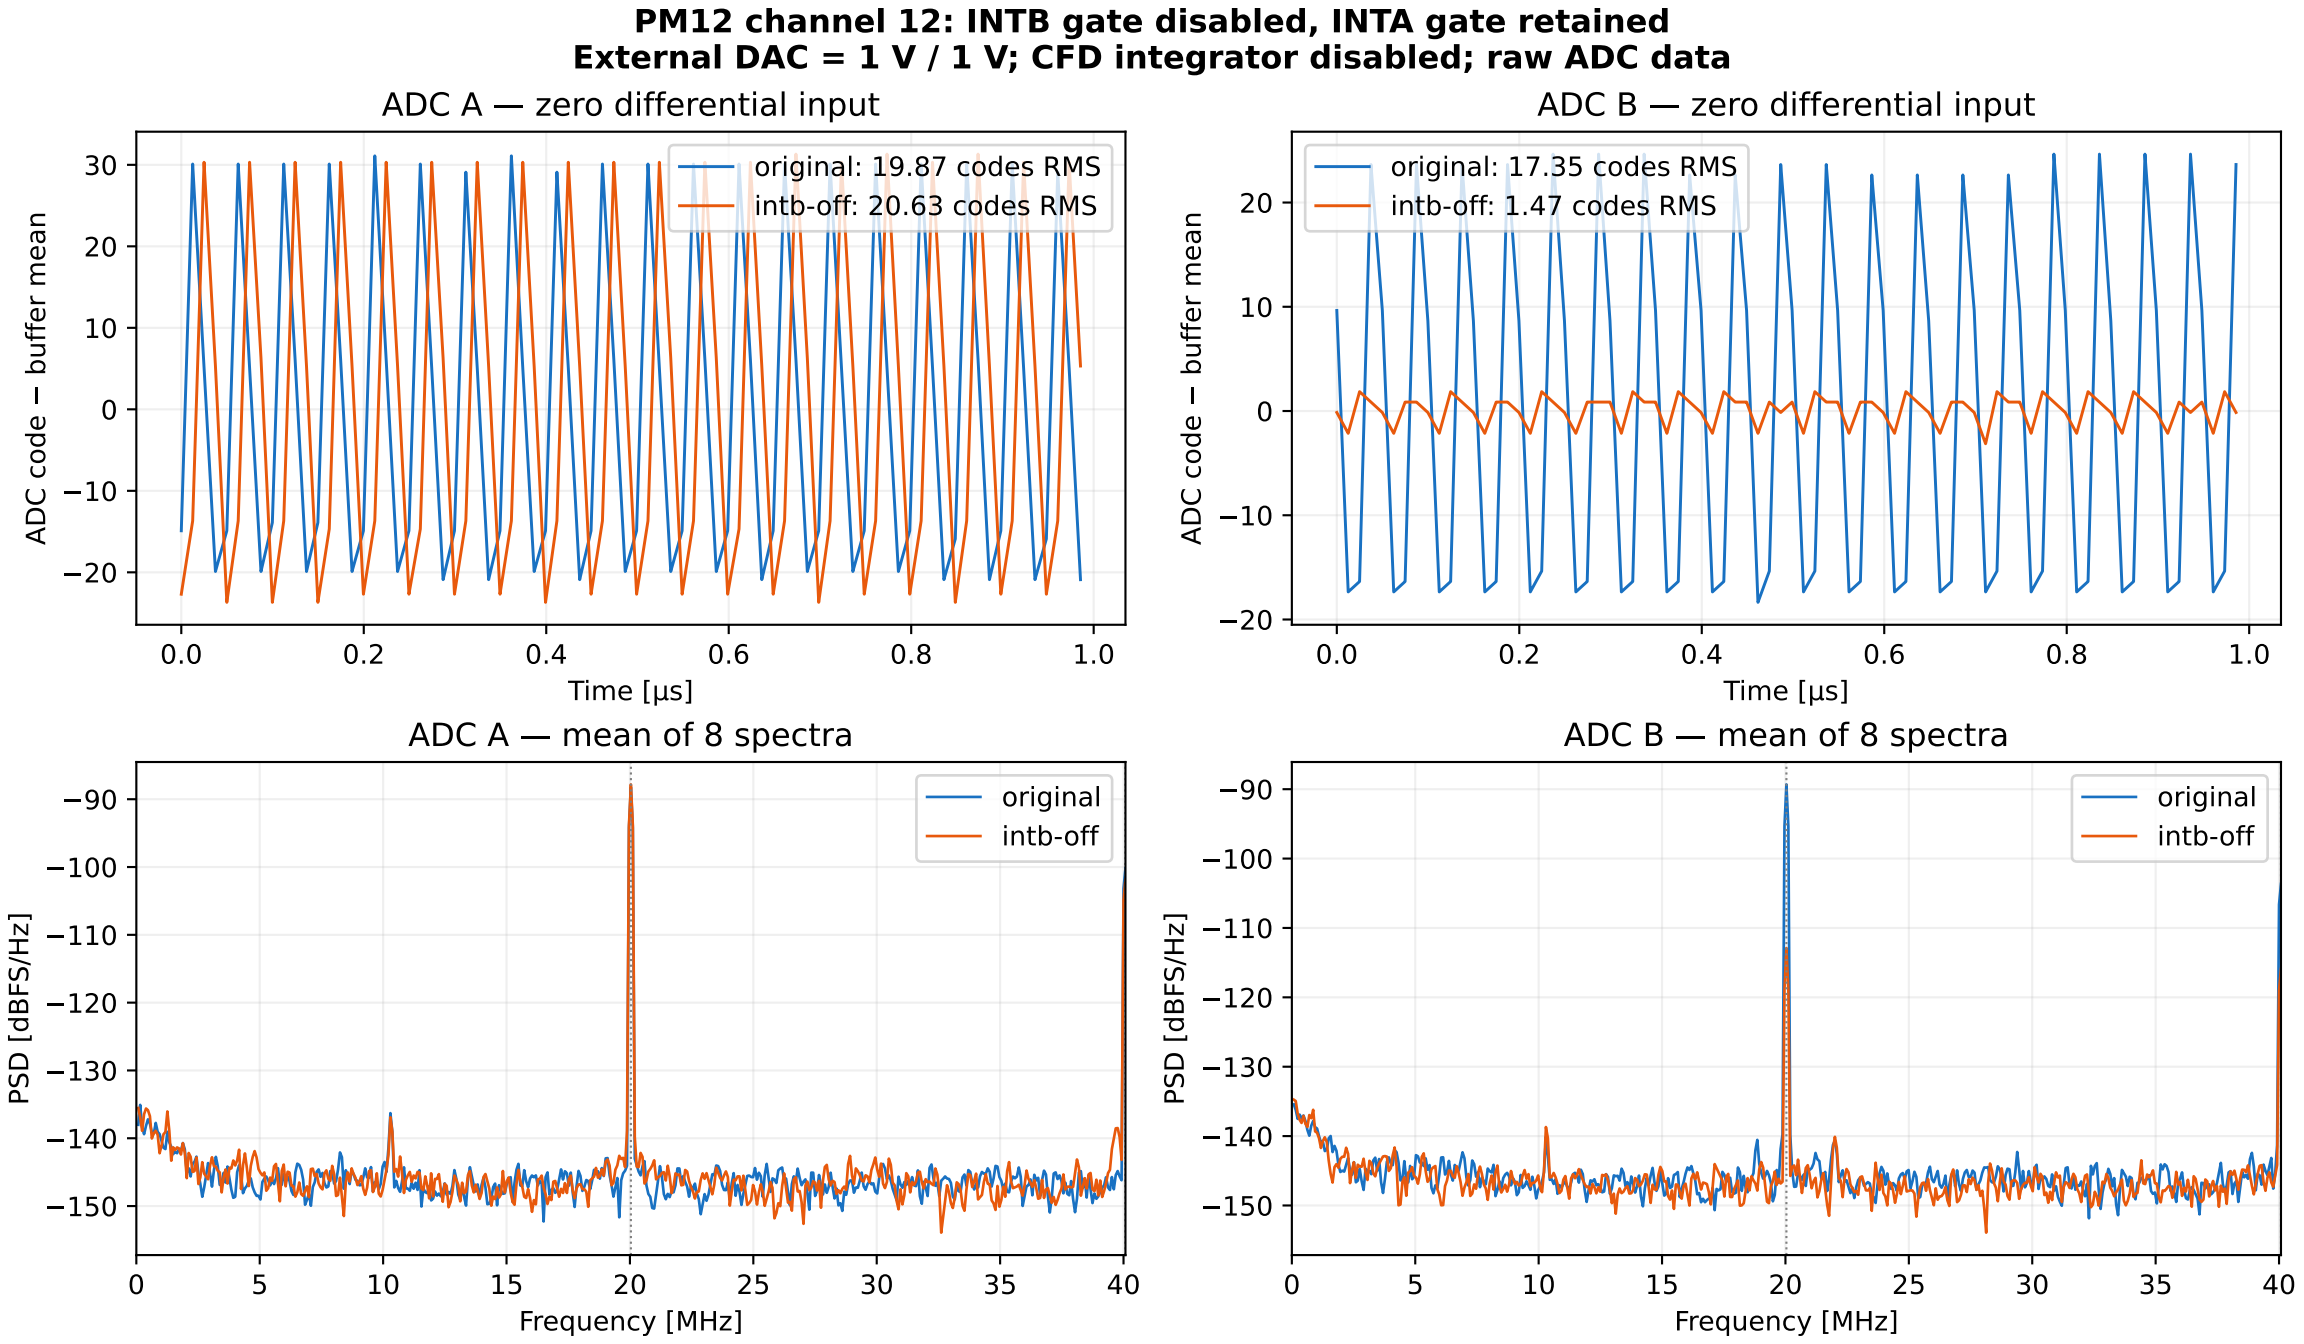
PM12 channel 12: INTB gate disabled, INTA gate retained
External DAC = 1 V / 1 V; CFD integrator disabled; raw ADC data
ADC A — zero differential input
original: 19.87 codes RMS
intb-off: 20.63 codes RMS
ADC code − buffer mean
Time [µs]
ADC B — zero differential input
original: 17.35 codes RMS
intb-off: 1.47 codes RMS
ADC code − buffer mean
Time [µs]
ADC A — mean of 8 spectra
original
intb-off
PSD [dBFS/Hz]
Frequency [MHz]
ADC B — mean of 8 spectra
original
intb-off
PSD [dBFS/Hz]
Frequency [MHz]