FIT PM12 — test-bench connections

40 MHz clock enters the HDMI adapter; analog DAC outputs connect to CFD_SIM.

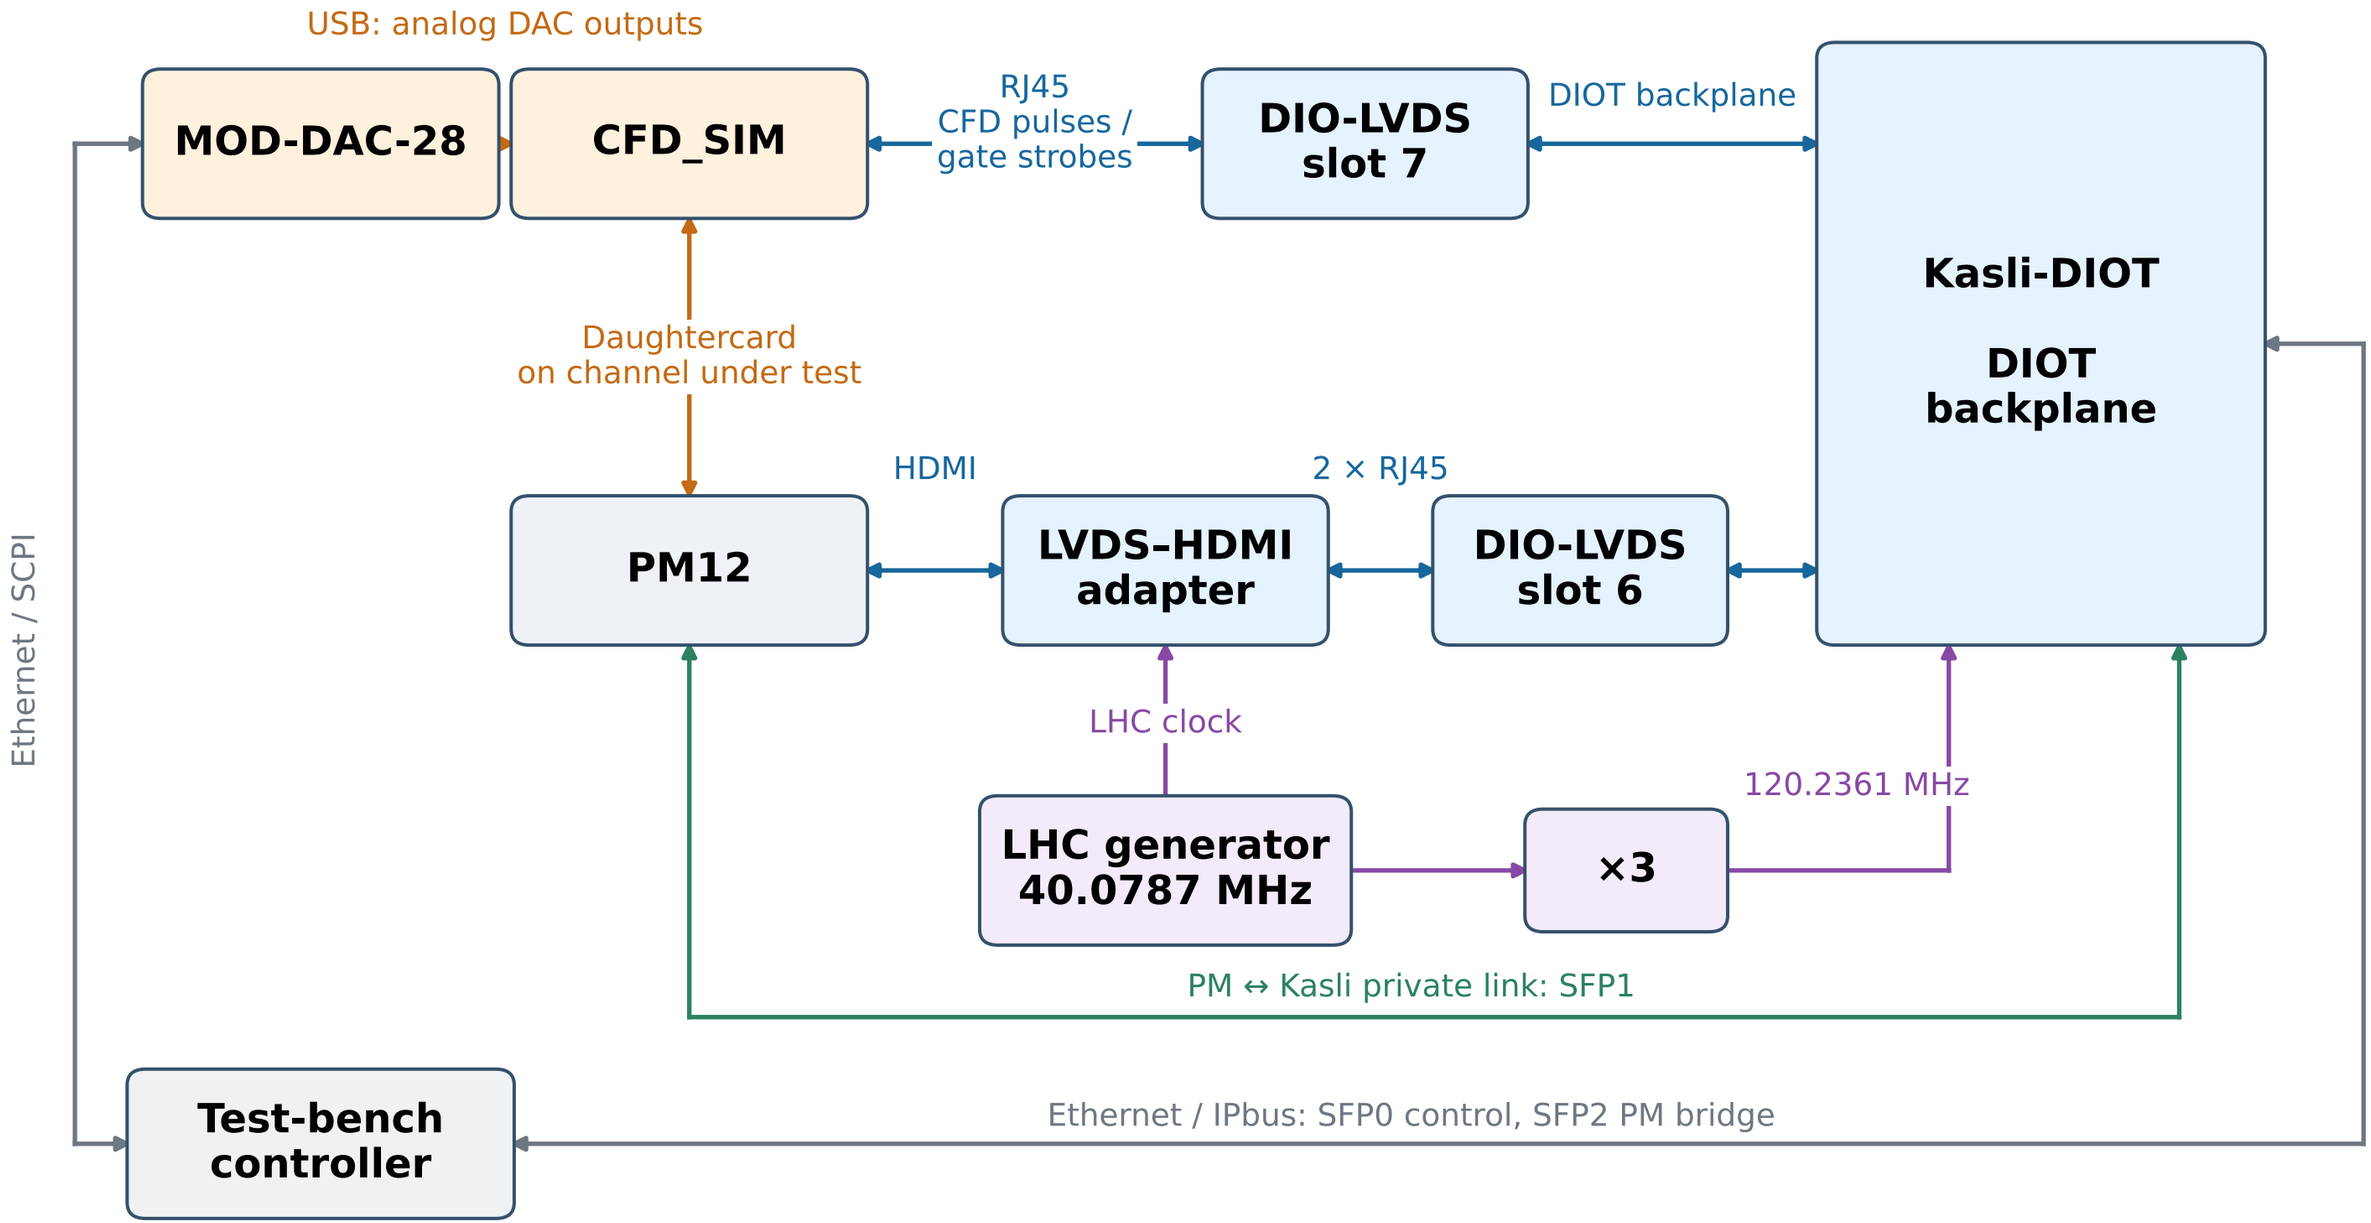

Main measurement paths and Ethernet control. UART/JTAG service cables and the DMM are omitted for clarity.