UNIVERSITY OF ADELAIDE / SA POWER NETWORKS CAPSTONE

Recovering missing asset attributes

Final capstone report

Rishank Goyal · Team 19 · Subteam A

Study scope. A synthetic transformer benchmark from Subteam C, a synthetic overhead conductor transfer, and matched follow-ups on grouped gaps, structural errors and screening. The principal benchmark contains 123 completed scenario × seed × split tasks. All reported results are transcribed or aggregated from the saved evidence.

Reading guide. Sections 1–5 describe the question and protocol. Sections 6–13 report the evidence. Section 14 lists limits. Section 15 gives the field and method verdicts, recommendations and earlier predictions.

At a glance. MissForest led the original feature-enabled anchor at 0.656 mean numeric skill. With grouped gaps it fell to 0.264. Matching the MLP training masks raised grouped skill to 0.453. The screening pilot shows how a separate check can flag suspicious values already in a record.

Contents

1. Purpose 3

2. Data 3

3. Experimental design 3

4. Methods and tuning 5

5. Evaluation framework 5

6. Anchor results 6

7. Missing rate, measurement noise and age-dependent gaps 8

8. Grouped gaps and structural errors 11

9. Confidence, calibration and auto-fill 14

10. Distribution, downstream life, consistency and exact rules 17

11. Screening values that are already recorded 21

12. Overhead transfer and earlier SAPN-style pilot 21

13. Robustness, tuning, verification and targeted checks 23

14. Limitations 25

15. Findings and conclusions 26

References 28

1. Purpose

The research question is how reliably missing asset attributes can be recovered, how well the completed register preserves the population, and when the available evidence warrants review or abstention. The intended use is to improve inputs to existing asset decisions and reliability models. The downstream exercise measures sensitivity to filled inputs in a synthetic setting.

We compare three learned imputers against transparent references. Point accuracy, uncertainty, distribution, downstream ranking and formula consistency are evaluated separately because success on one does not imply success on the others.

2. Data

The primary source is Subteam C's synthetic transformer generator. It creates a 100 × 100 location grid, tracks installation order, and supplies measured and clean reference values. Location and installation day are strongly linked in this generator. The model-dependent gases, environmental variables, life outcome and random placebo allow us to compare recoverable, weakly identified and uninformative targets. Clean truth is held outside model fitting. The original supplied pairs are audited cell for cell against the generator before use.

The overhead study uses a separate synthetic conductor register derived from the team's pilot work. Its historical context is SA Power Networks' October 2014 *Asset Management Plan 3.1.10, Overhead Conductor*, published by the Australian Energy Regulator. The benchmark uses prepared, aligned clean and measured pairs, with feeder identifiers used only to define held-out groups. It evaluates eight fields. Real operational tolerances remain a question for SAPN.

Source coverage

Source	Rows per clean table	Evaluated fields	Inputs
Transformers	10,000	15	9 original clean/measured pairs
Overhead conductors	10,000	8	4 prepared clean/measured pairs, feeder ID retained for grouping

Why. The generator and paired truth let us score only hidden entries while keeping the measured inputs intact. The two asset classes carry different signal and use separate split designs.

Saved source — final/source_audit.csv; final/tables/data_audit.csv; final/contract.json.

3. Experimental design

Splits and paired comparisons

The transformer generator seeds were 219, 220 and 221. The split seeds were 617, 631 and 653. The splitter holds out whole 10 × 10 tiles and stratifies by x band, allocating 60% to training, 10% to tuning, 10% to calibration and 20% to test. Clean coordinates define blocks and never enter a fitted model unless available in the measured input. Overhead uses disjoint feeder groups and the same three split seeds. The same asset can appear across different repetitions, so cells are not treated as independent replicates.

Twenty named data conditions

Eighteen named scenarios were in the principal run and two were added in the grouped/structural stress run. The no-gas anchor is an additional feature configuration of an existing scenario. The grouped MLP retraining, single-target and noise-family diagnostics and screening are follow-ups, reported separately.

Data conditions and matched repetitions

Scenario	Nominal gaps	Noise	How observations change	Pairs
mcar10-n00	10%	±0%	Independent cells	9
mcar10-n05	10%	±5%	Independent cells	9
mcar10-n10	10%	±10%	Independent cells	9
mcar20-n00	20%	±0%	Independent cells	9
mcar20-n05	20%	±5%	Independent cells	9
mcar20-n10	20%	±10%	Independent cells	9
mcar30-n00	30%	±0%	Independent cells	9
mcar30-n05	30%	±5%	Independent cells	9
mcar30-n10	30%	±10%	Independent cells	9
mnar30-n05	30%	±5%	Older dates hidden more often	9
mcar50-n05	50%	±5%	Independent cells	3
mcar70-n05	70%	±5%	Independent cells	3
mar30-n05	30%	±5%	Date masking depends on observed x	3
mcar30-n20	30%	±20%	Independent cells	3
overhead20-n00	20%	0%	Supplied mask and corruption	3
overhead20-n10	20%	10%	Supplied mask and corruption	3
overhead20-n30	20%	30%	Supplied mask and corruption	3
overhead20-n50	20%	50%	Supplied mask and corruption	3
group30-n05	30%	±5%	Whole related blocks	9
mcar30-n05-outliers	30%	±5% + date/code errors	Anchor mask; recorded errors	9

Why. Shared draws keep the MCAR masks nested across missingness rates and keep the mask fixed across noise levels. MAR keeps x visible and changes the date gap probability by x. MNAR instead depends on the unseen date. Overhead noise denotes the supplied corruption frequency rather than transformer noise amplitude.

Saved source — final/tables/macro_run_scores.csv; final/contract.json; anchor-stress/contract.json and run_status.json.

Preprocessing and engineered inputs

The model-only arm imputes directly. The rules-first arm applies the altitude, gas sum and nonnegative overgrowth identities where all required inputs are reliable and the missing term is uniquely determined. At nonzero transformer noise only the altitude identity qualifies as exact. Zero overgrowth leaves two inverse relations underdetermined. Observations stay as recorded.

Features use training-only numeric summaries and missingness indicators, nominal category encoding, a spatial estimate of installation day from observed training neighbours, and optional decay-corrected gases. The spatial estimate excludes the same coordinate. Dependency tracking prevents derived columns from reading the target. Forest, ridge, k-NN and the MLP exclude the placebo as an input. The mixture models it as an observed dimension and is checked for spurious skill. The feature ablation removes the decay correction and retains the spatial feature.

4. Methods and tuning

Methods in the benchmark

Method	Fit and prediction
Median / mode	Fit training medians and modal categories as the floor.
Chained ridge	Fit ridge regressions and logistic conditionals once; cycle over missing values.
k-NN	Use a deterministic training donor sample and observed-input overlap with mixed-type encoding.
Predictive MissForest	Fit separate forest conditionals on observed targets; reuse the fitted trees on new rows.
Gaussian EM	Fit a four-component mixture with shared full covariance using incomplete-data EM; use conditional moments and component-weighted class frequencies.
Masked MLP	Reconstruct artificially hidden training cells with numeric location/scale and class heads. In rules first, hide before rules and exclude exact recoveries from the training loss.

Why. The simple references test whether the learned methods improve on a median, a linear conditional or nearby donors. The three primary methods exploit different kinds of signal. The masked MLP is inspired by ReMasker, whose published architecture uses a Transformer.

Saved source — final/tables/selected_settings.csv; final/contract.json; project implementation.

The original search compared 20 settings per trainable method and seed pair on the 30% MCAR anchor with ±5% noise. The tuning subset used 1,500 training rows and 750 tuning rows. Candidate selection used mean hidden attribute skill excluding the placebo. The winners were refit on the full training partitions, then reused across transformer scenarios. Overhead used default settings. The masked MLP grouped-masking variant was introduced after reviewing the original grouped test results, with saved model settings retained.

5. Evaluation framework

Five complementary evaluation layers

Layer	Measures and decision use
Hidden-cell accuracy	Numeric MAE, skill relative to the median and fraction within tolerance. Categories use misclassification skill where defined, macro-F1, log loss and Brier score.
Distribution	Hidden and completed Wasserstein distances for numeric point fills, fill-to-truth spread, categorical total variation, mixed-table energy distance and correlation error.
Confidence	Numeric coverage, interval width and score. Categorical temperature scaling and top-label expected calibration error. Eligibility, precision, review and abstention.
Downstream life	Same ridge design with clean versus filled inputs. Compare MAE, rank correlation and recall of the true lowest-life decile. Hide life during feature imputation.
Record consistency	Exact and tolerance-level agreement with altitude, gas sum and overgrowth identities on records with gaps; compare observed-only tolerance agreement.

Why. The layers separate recovery of individual values from preservation of the population and performance in a downstream use. Absolute and relative error can lead to different decisions.

Saved source — final/tables/cells.csv, distribution.csv, patterns.csv, downstream.csv, consistency.csv, tables.csv.

Numeric tolerances

Field or family	Tight	Loose
x, y	±1 grid cells	±5 grid cells
Installation day	±7 days	±30 days
Altitude	±1 units	±5 units
Life	±100 units	±500 units
Humidity, salt, overgrowth, placebo	±10%	±15%
Gases A/B/C and leakage	±5%	±10%
Total gas	±1%	±5%
Overhead installation year	±5 years	±10 years
Overhead distance and length	±5%, with 2% of training range as floor	±5%, with 2% of training range as floor

Why. Use absolute limits for fields with meaningful units and calendar offsets. Overhead installation-year limits are provisional. Categorical fills must match the true class to count as correct.

Saved source — final/contract.json.

Numeric skill is 1 − MAE / median-floor MAE. Categorical skill uses misclassification error relative to the mode. A floor error below 0.05 suppresses categorical skill. The mean numeric score weights attributes equally and omits the placebo. Descriptive 95% intervals resample the generator and split axes separately, and matched contrasts subtract the score within each pair before resampling. The few independent seeds limit interpretation of small differences.

Numeric uncertainty starts with a model scale and uses finite-sample split-conformal calibration on independent, re-masked calibration blocks. Use an exact mask with at least 50 calibration examples, then key visibility plus gap burden, key visibility alone and finally the pooled field. Categorical probabilities use temperature scaling. Auto-fill eligibility requires the whole numeric band to fit the tight limit, an applicable exact rule or a calibrated class probability of at least 95%. The loose numeric limit or a categorical probability of at least 65% routes to review. Other cases abstain. A field deployment additionally needs independent pattern-level coverage or precision evidence. The target numeric coverage is 90%.

6. Anchor results

Thirty percent MCAR with ±5% noise

Method	Model skill	Rules skill	Model ID F1[1]	Numeric coverage[1]	Eligible[1]	Precision[1]
Median / mode	0.000	0.113	0.110	91.6%	11.4%	100.0%
Chained ridge	0.500	0.550	0.940	91.8%	15.9%	98.2%
k-NN	0.483	0.540	0.944	91.7%	23.2%	99.0%
MissForest	0.656	0.656	0.962	91.9%	30.3%	98.5%
Gaussian EM	0.641	0.648	0.893	91.8%	19.5%	99.0%
Masked MLP	0.563	0.595	0.957	91.8%	21.1%	98.1%

Why. MissForest can exploit interactions among position, gases and model ID when clues are available. The model-only difference, EM minus MissForest, was -0.015 with a descriptive 95% interval from -0.020 to -0.006. [1] Rules-first; numeric coverage and eligibility are distinct.

Saved source — final/tables/macro_run_scores.csv, cells.csv, paired_intervals.csv.

Full attribute skill — Model only

Field	Floor	Ridge	k-NN	Forest	EM	MLP
x	0.000	0.660	0.739	0.886	0.917	0.795
y	0.000	0.450	0.245	0.502	0.663	0.441
Installation day	0.000	0.607	0.753	0.889	0.918	0.793
Model ID	0.000	0.920	0.928	0.948	0.916	0.939
Altitude	0.000	0.535	0.441	0.608	0.749	0.631
Humidity	0.000	0.466	0.334	0.578	0.555	0.462
Salt	0.000	0.168	0.110	0.354	0.311	0.123
Overgrowth	0.000	0.574	0.381	0.681	0.648	0.582
Life	0.000	0.384	0.469	0.671	0.499	0.583
Placebo	0.000	-0.003	-0.026	-0.005	-0.001	-0.003
Gas A	0.000	0.680	0.737	0.842	0.747	0.755
Gas B	0.000	0.712	0.677	0.814	0.786	0.723
Gas C	0.000	0.652	0.679	0.814	0.644	0.693
Total gas	0.000	0.563	0.695	0.767	0.756	0.722
Leakage	0.000	0.043	0.016	0.119	0.140	0.015

Why. Forest performance is strongest for fields with correlated measurements. Gaussian EM is competitive on the spatial and installation fields. The random placebo remains near the floor.

Saved source — final/tables/cells.csv, group all.

Full attribute skill — Exact rules first

Field	Floor	Ridge	k-NN	Forest	EM	MLP
x	0.481	0.836	0.865	0.934	0.945	0.879
y	0.500	0.517	0.604	0.525	0.692	0.572
Installation day	0.000	0.758	0.790	0.930	0.935	0.845
Model ID	0.000	0.919	0.926	0.950	0.886	0.943
Altitude	0.485	0.606	0.700	0.472	0.764	0.700
Humidity	0.000	0.468	0.330	0.581	0.556	0.469
Salt	0.000	0.164	0.109	0.349	0.311	0.128
Overgrowth	0.000	0.575	0.379	0.684	0.648	0.594
Life	0.000	0.395	0.470	0.679	0.505	0.598
Placebo	0.000	-0.004	-0.028	-0.007	-0.001	-0.002
Gas A	0.000	0.729	0.719	0.842	0.739	0.761
Gas B	0.000	0.736	0.653	0.816	0.785	0.728
Gas C	0.000	0.653	0.664	0.817	0.641	0.704
Total gas	0.000	0.667	0.712	0.775	0.756	0.739
Leakage	0.000	0.047	0.019	0.129	0.141	0.015

Why. Rules supply some exact geometry fills and change the fitted models for the remaining gaps. The average can hide deterioration on hard residual cells; Section 10 gives the altitude decomposition.

Saved source — final/tables/cells.csv, group all.

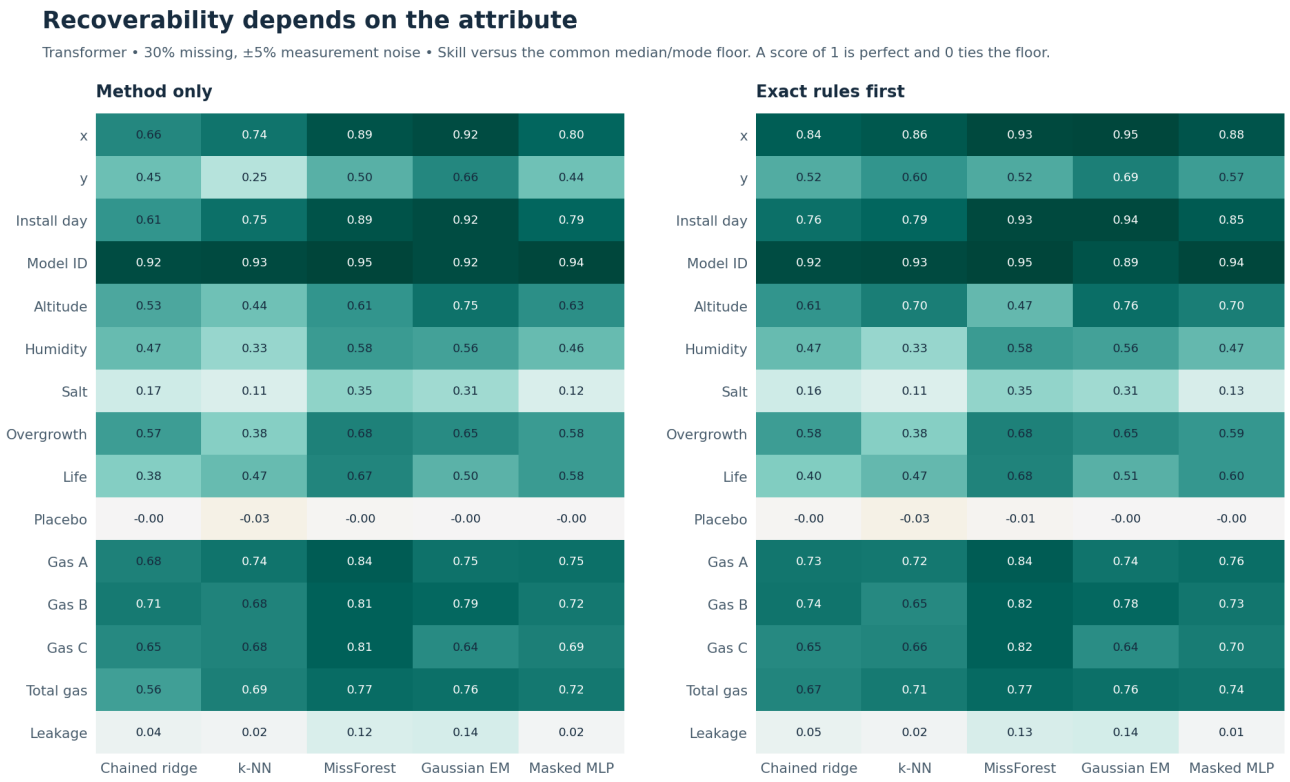


Figure 1. Attribute skill at the anchor. Compare the same rows across arms. The geometry, dates and gases are easier to recover than leakage or the placebo. The rules-first change differs by field and method.

7. Missing rate, measurement noise and age-dependent gaps

Model-only numeric skill across the transformer scenarios

Scenario	Floor	Ridge	k-NN	Forest	EM	MLP
mcar10-n00	0.000	0.689	0.614	0.793	0.748	0.695
mcar10-n05	0.000	0.682	0.605	0.775	0.739	0.690
mcar10-n10	0.000	0.676	0.580	0.759	0.729	0.678
mcar20-n00	0.000	0.601	0.555	0.736	0.704	0.630
mcar20-n05	0.000	0.597	0.546	0.720	0.692	0.625
mcar20-n10	0.000	0.592	0.523	0.706	0.677	0.611
mcar30-n00	0.000	0.500	0.492	0.670	0.653	0.570
mcar30-n05	0.000	0.500	0.483	0.656	0.641	0.563
mcar30-n10	0.000	0.495	0.463	0.640	0.625	0.550
mcar50-n05	0.000	0.117	0.374	0.502	0.520	0.427
mcar70-n05	0.000	-0.339	0.240	0.302	0.345	0.288
mar30-n05	0.000	0.524	0.473	0.652	0.622	0.548
mcar30-n20	0.000	0.475	0.427	0.614	0.606	0.535
mnar30-n05	0.000	0.492	0.487	0.663	0.642	0.569

Why. As independent masking grows, fewer useful inputs survive. The ±20% stress adds measurement error on the seven measured fields. MAR keeps x visible, changing which clues are available. Match the generator and split before interpreting the differences in the optional scenarios.

Saved source — final/tables/macro_run_scores.csv.

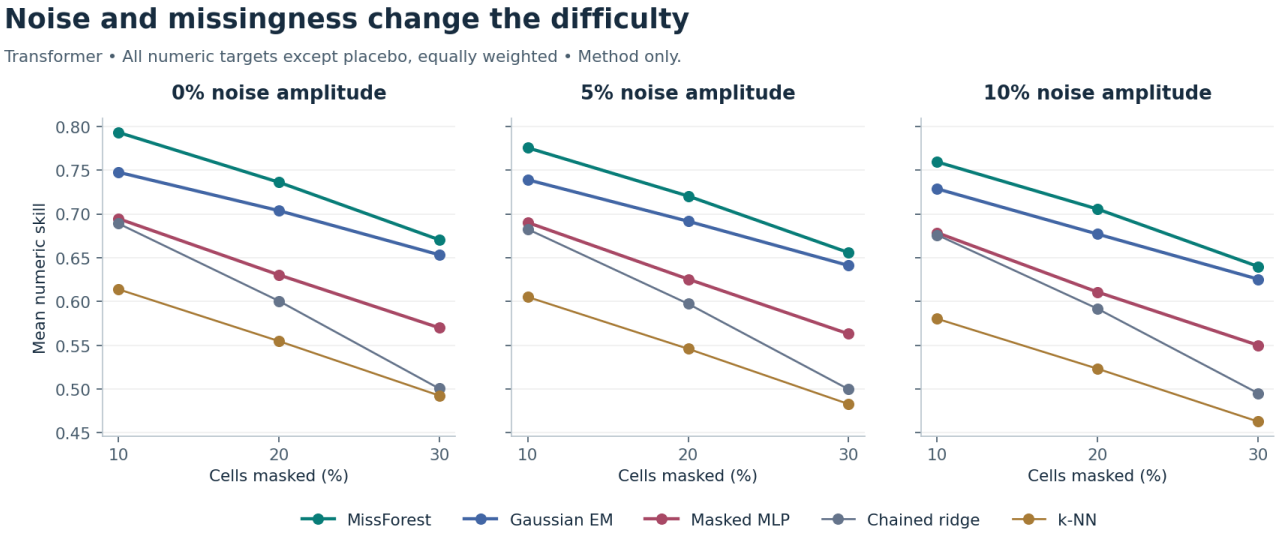


Figure 2. The missing-rate and noise grid. Slopes show how much skill changes as observations disappear within a noise setting. The chart uses the same weighting and domain-feature arm as the table.

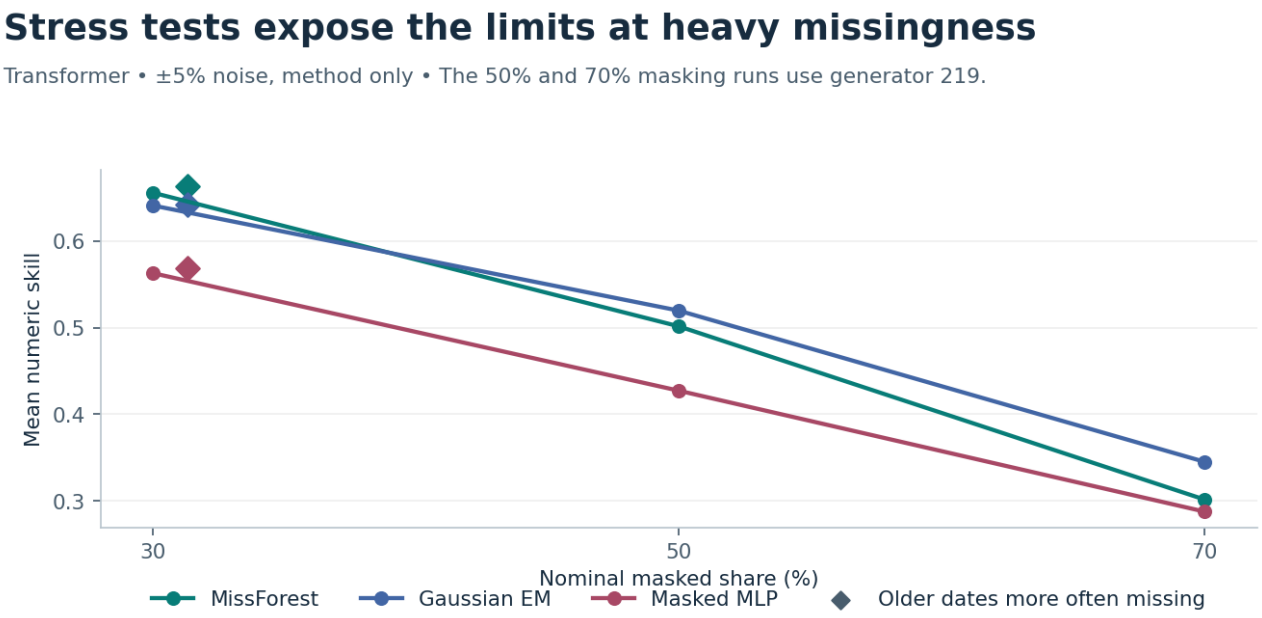


Figure 3. Heavy independent missingness. At 70% independent missingness, Gaussian EM leads the three primary methods. This scenario is distinct from 30% grouped missingness and does not use the later grouped MLP training variant.

MAR and ±20% noise on matched generator and splits

Method	Anchor skill	MAR skill	20% noise skill	Anchor / MAR / 20% within loose tolerance
Median / mode	0.000	0.000	0.000	32.1% / 33.6% / 31.7%
Chained ridge	0.487	0.524	0.475	55.0% / 65.1% / 54.3%
k-NN	0.490	0.473	0.427	53.2% / 54.2% / 50.2%
MissForest	0.664	0.652	0.614	68.5% / 70.0% / 66.4%
Gaussian EM	0.645	0.622	0.606	74.5% / 74.8% / 72.6%
Masked MLP	0.565	0.548	0.535	59.3% / 60.5% / 58.6%

Why. The MAR perturbation changes which rows are hidden and keeps x available; the 20% perturbation preserves the MCAR mask and changes only jitter amplitude. These are different mechanisms. The matching here removes variation from using a different generator.

Saved source — final/tables/macro_run_scores.csv, seed 219, model only, domain features on.

MissForest installation-day audit, MCAR / MNAR

True age band	Masked share	MAE, days	Bias, days	Age-share change, pp
Oldest	29.6% / 54.5%	39.3 / 27.6	+30.3 / +16.7	-0.24 / -0.02
Older middle	30.0% / 56.2%	40.0 / 37.6	-3.8 / -9.5	+0.60 / -0.48
Younger middle	30.2% / 4.9%	42.7 / 58.6	+1.4 / -11.9	-0.34 / +0.53
Youngest	30.4% / 5.2%	30.8 / 40.0	-18.2 / -33.5	-0.02 / -0.03
Older half	29.8% / 55.4%	39.5 / 32.7	+12.8 / +3.2	+0.36 / -0.50

Why. The hidden dates differ across scenarios. The median-floor MAE rises from 342.9 to 497.8 days. Relative skill increases even though the older-heavy masked population and the floor have changed. Positive date bias makes the asset appear younger.

Saved source — final/tables/installation_age_summary.csv.

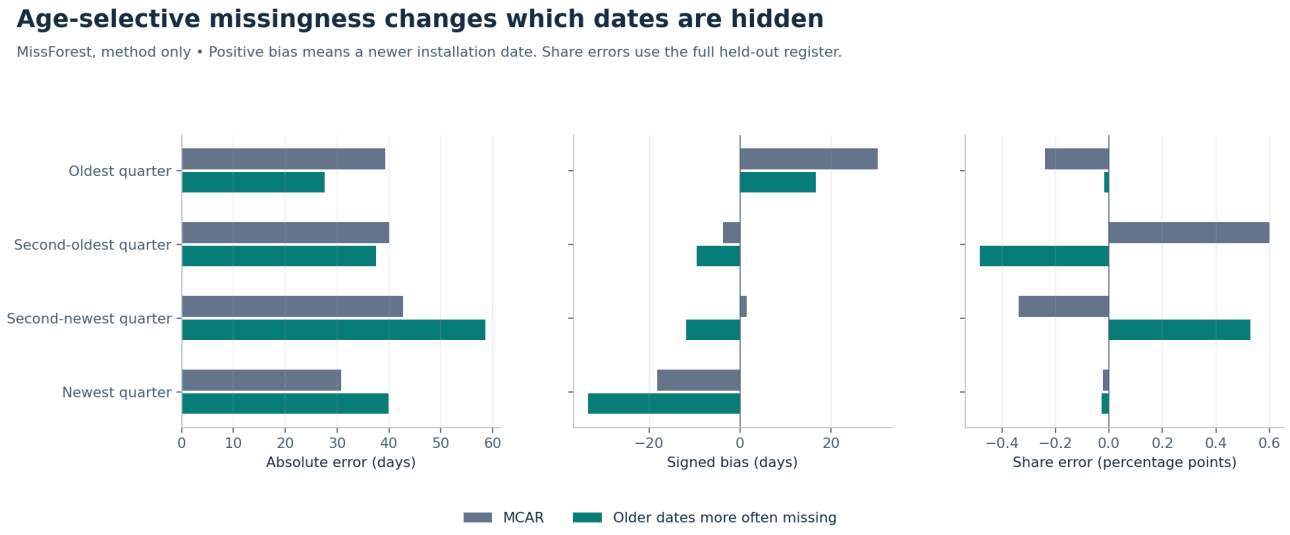


Figure 4. Age-selective gaps and date bias. Compare absolute date error and signed error before the completed register's age shares. The bars represent fixed reference age bands for each generator seed.

8. Grouped gaps and structural errors

The grouped test holds the nominal 30% gap rate and ±5% jitter fixed. It hides the location block, gas block, environmental block, or installation-day/model-ID block together. Life, leakage and placebo keep their own draws. The structural test preserves the independent anchor mask and adds ±60-day shifts to about 5% of dates and valid code swaps to about 2% of model IDs. Both tests preserve recorded values.

Mean numeric skill, model only

Method	Scattered	Grouped	Structural errors
Median / mode	0.000	0.000	0.000
Chained ridge	0.500	0.249	0.496
k-NN	0.483	0.370	0.480
MissForest	0.656	0.264	0.650
Gaussian EM	0.641	0.435	0.629
Masked MLP	0.563	0.375	0.559
MLP with matched training masks	—	0.453	—

Why. Grouped gaps remove the helper fields together. Under grouped masking MissForest humidity skill is 0.06 and salt is -0.03. y and altitude fall below their medians when both the geometric inputs and their exact formula are unavailable.

Saved source — failure-audit/tables/mean_numeric_skill_by_pair.csv; anchor-stress/tables/cells.csv.



Figure 5. Where recovery breaks. The grouped bars fall most for the location and environmental fields. The structural-error bars largely follow the scattered average, which is why a row-level check is needed.

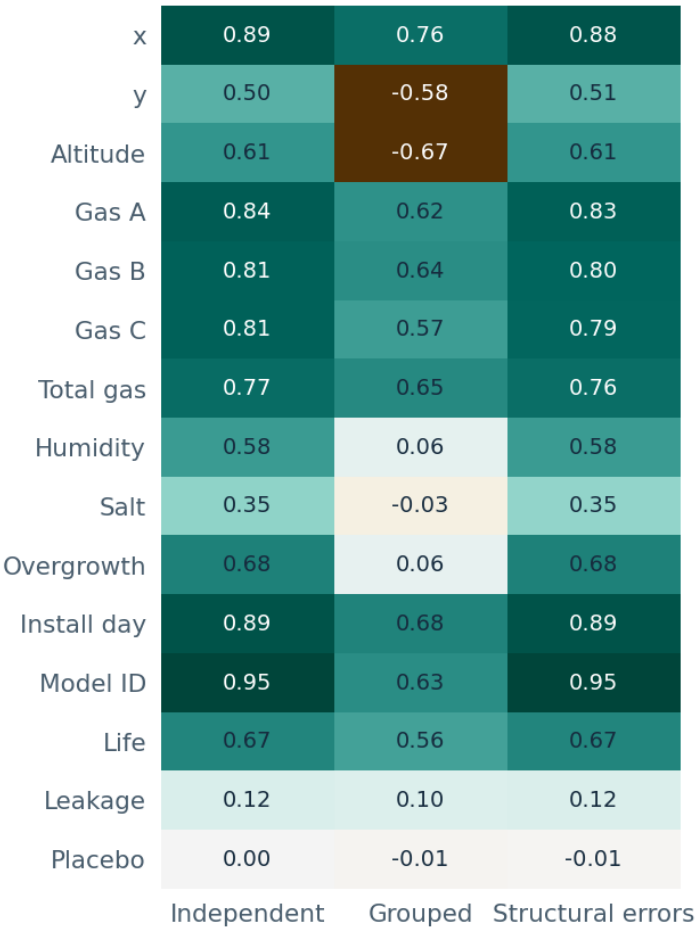


Figure 6. MissForest field results in the stress tests. The heat map complements the bars. Compare the sharp drop in the grouped column against the small mean change with structural errors.

MissForest on the same hidden gas cells with a wrong visible clue

Target	Hidden cells	Anchor MAE	Structural-error MAE
Gas A	31	178.2	538.7
Gas B	29	245.9	567.4
Gas C	31	220.8	744.7

Why. The full-test average dilutes the effect because relatively few rows have a corrupt clue. This matched split illustrates how a wrong recorded date or model code can distort multiple gas fills.

Saved source — failure-audit/tables/structural_error_cohort_219_617.csv, generator 219 and split 617.

Matched MLP training masks

Evaluation	Independent remasking	Grouped remasking	Pair wins
Grouped test, model only	0.375	0.453	9/9
Grouped test, rules first	0.386	0.453	9/9
Grouped tuning blocks, model only	0.371	0.454	9/9

Why. Extra group-wise masking trains on the same kind of absent inputs the model sees at test. This correction was made after inspecting the grouped test results. The retrospective check on the original tuning blocks supports the comparison without a new hyperparameter search. The grouped MLP also beat Gaussian EM in 9/9 paired test comparisons.

Saved source — failure-audit/tables/mlp_remask_comparison.csv, grouped_mlp_vs_em.csv; final-review/grouped_mlp_tuning_by_pair.csv.

Helper-field diagnostics for MissForest

Target	Alone MAE	Scattered MAE	Grouped MAE
Installation day	10.03	38.15	110.71
y	4.57	12.58	40.11
Altitude	4.99	12.85	54.65
Humidity	0.03	0.07	0.16
Overgrowth	0.02	0.10	0.28

Why. The alone scenario uses the same hidden target cells as scattered gaps and leaves the other fields visible. The grouped scenario also hides the helpers. The alone comparison changes the fitted model and is an information-rich reference rather than a guaranteed upper bound on skill.

Saved source — anchor-diagnostics/tables/masking_summary.csv and paired_masking.csv.



Figure 7. Availability of helper fields. The alone, scattered and grouped bars isolate availability. Gaussian EM's date result illustrates that refitting under different masks can change the outcome even with more observed inputs.

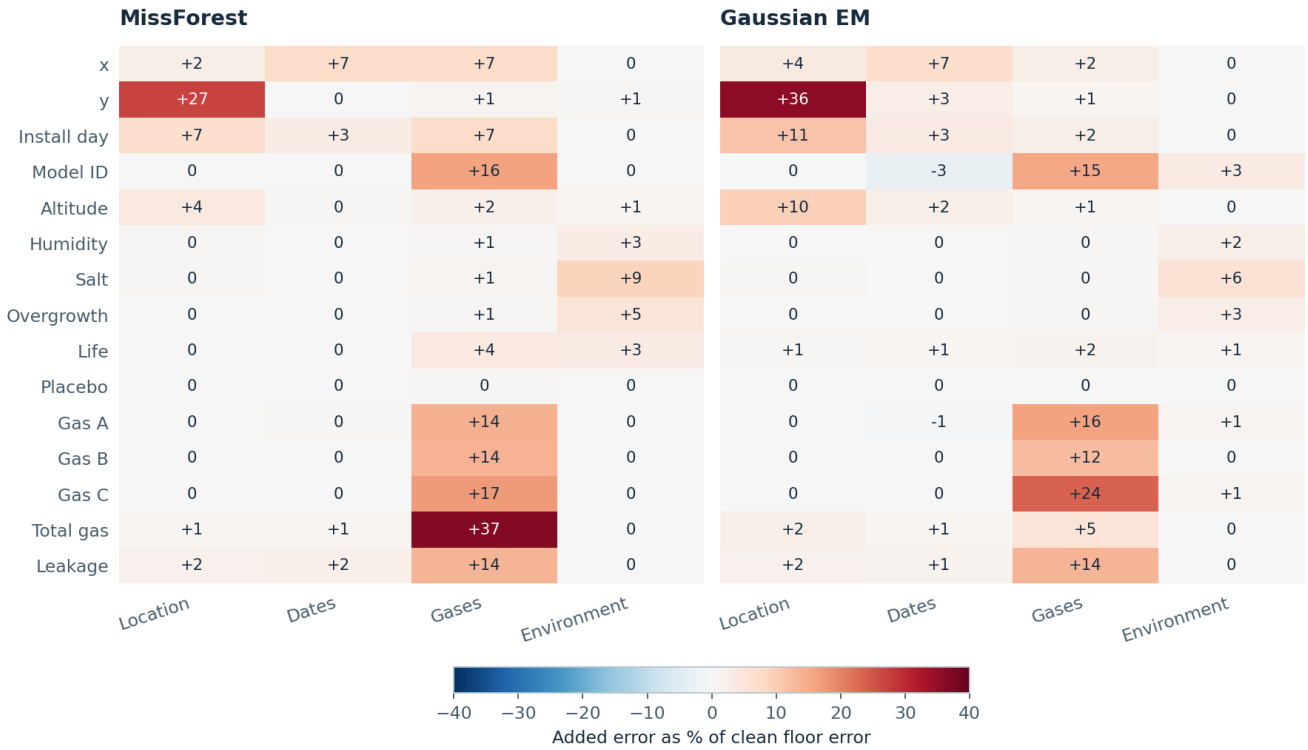


Figure 8. Sensitivity to which inputs are noisy. Each family is compared with the clean anchor on matched gaps. Warm cells show increases in error as a share of clean floor error. This design combines changes to recorded predictors and training values.

9. Confidence, calibration and auto-fill

Worst supported anchor pattern for MissForest

Intervals	Observed coverage
Raw	26.4%
Pooled	65.3%
Pattern-aware	73.2%

Why. Pooling mixes easy and difficult missingness patterns. Matching coverage to the evidence available improves the weakest result, which remains below 90%. Each column reports its own minimum over the supported pattern-and-run rows.

Saved source — final/tables/patterns.csv, model only, key+burden, domain features on.

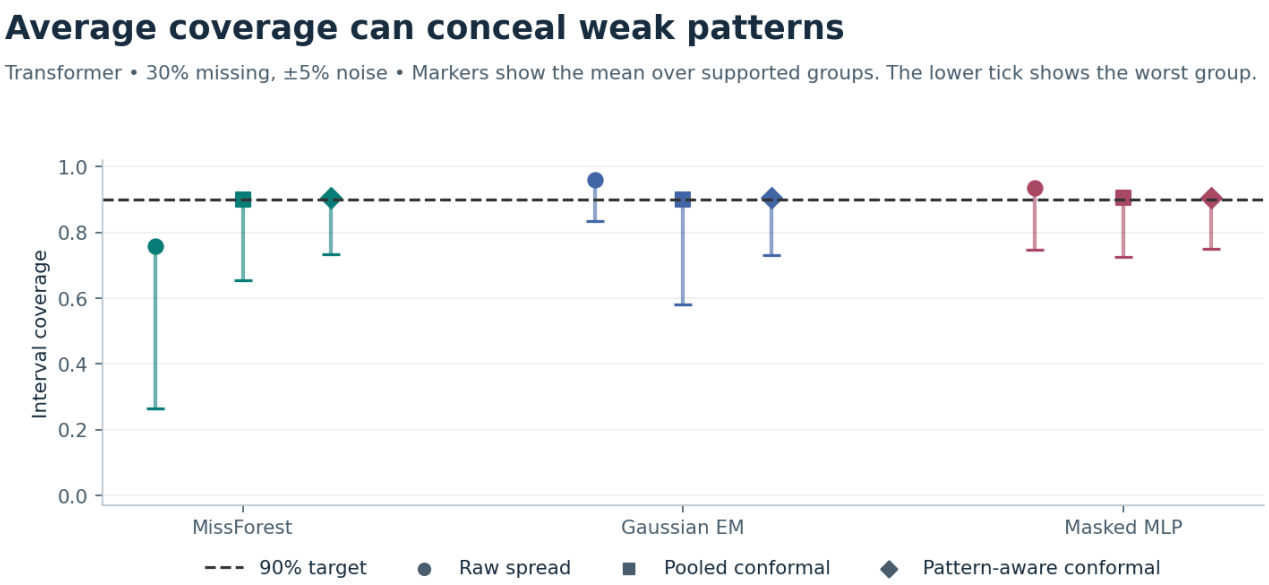


Figure 9. Coverage by missing pattern. A reasonable overall coverage value can coexist with weak groups. Read the pattern minimum alongside raw, pooled and pattern-aware coverage.

Model ID probability calibration at the anchor

Method	Raw log loss	Scaled log loss	Raw ECE	Scaled ECE
MissForest	0.2862	0.1937	0.0303	0.0281
Gaussian EM	0.1221	0.1224	0.0137	0.0139
Masked MLP	0.1058	0.1040	0.0195	0.0161

Why. Temperature is fitted against log loss. Expected calibration error uses bins and can move differently. The result should be read together with class error, the size of the eligible group and observed precision.

Saved source — final/tables/cells.csv, model only, Model ID.

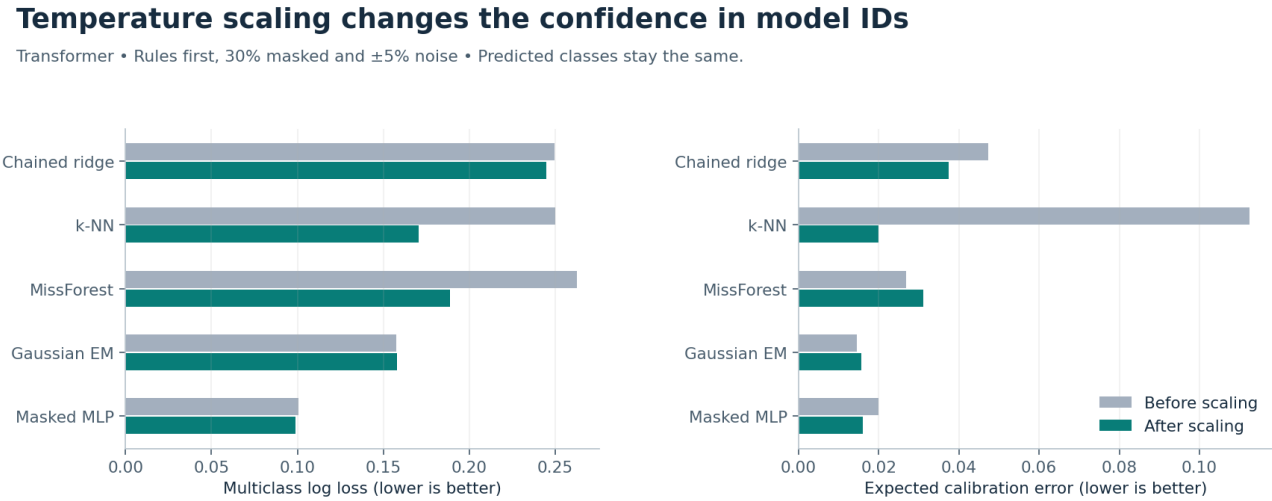


Figure 10. Temperature scaling and probability error. Log loss and binned expected calibration error measure different effects of rescaling class probabilities.

Grouped gaps and the confidence gate, rules first

Method and field	Eligible	Precision	Coverage	Abstain
MissForest · Gas A	21.1%	93.98%	87.9%	48.8%
MissForest · Model ID	0.0%	—	—	29.0%
Gaussian EM · Model ID	70.6%	99.97%	—	21.2%
MissForest · y	0.0%	—	88.5%	100.0%
Gaussian EM · y	0.0%	—	88.4%	100.0%
MissForest · Altitude	0.0%	—	87.0%	100.0%
Gaussian EM · Altitude	0.0%	—	89.1%	100.0%
MissForest · Humidity	0.0%	—	90.9%	100.0%
Gaussian EM · Humidity	0.0%	—	91.0%	100.0%
MissForest · Salt	0.0%	—	91.2%	100.0%
Gaussian EM · Salt	0.0%	—	92.4%	100.0%
MissForest · Overgrowth	0.0%	—	91.0%	100.0%
Gaussian EM · Overgrowth	0.0%	—	90.6%	100.0%

Why. Wide bands stop low-evidence numeric fills even when coverage is near target. MissForest Gas A breaches the 95% precision target and falls below 90% coverage. Require independent pattern validation. Under these grouped gaps Gaussian EM assigns a much larger high-probability class subset than MissForest.

Saved source — failure-audit/tables/routing.csv.

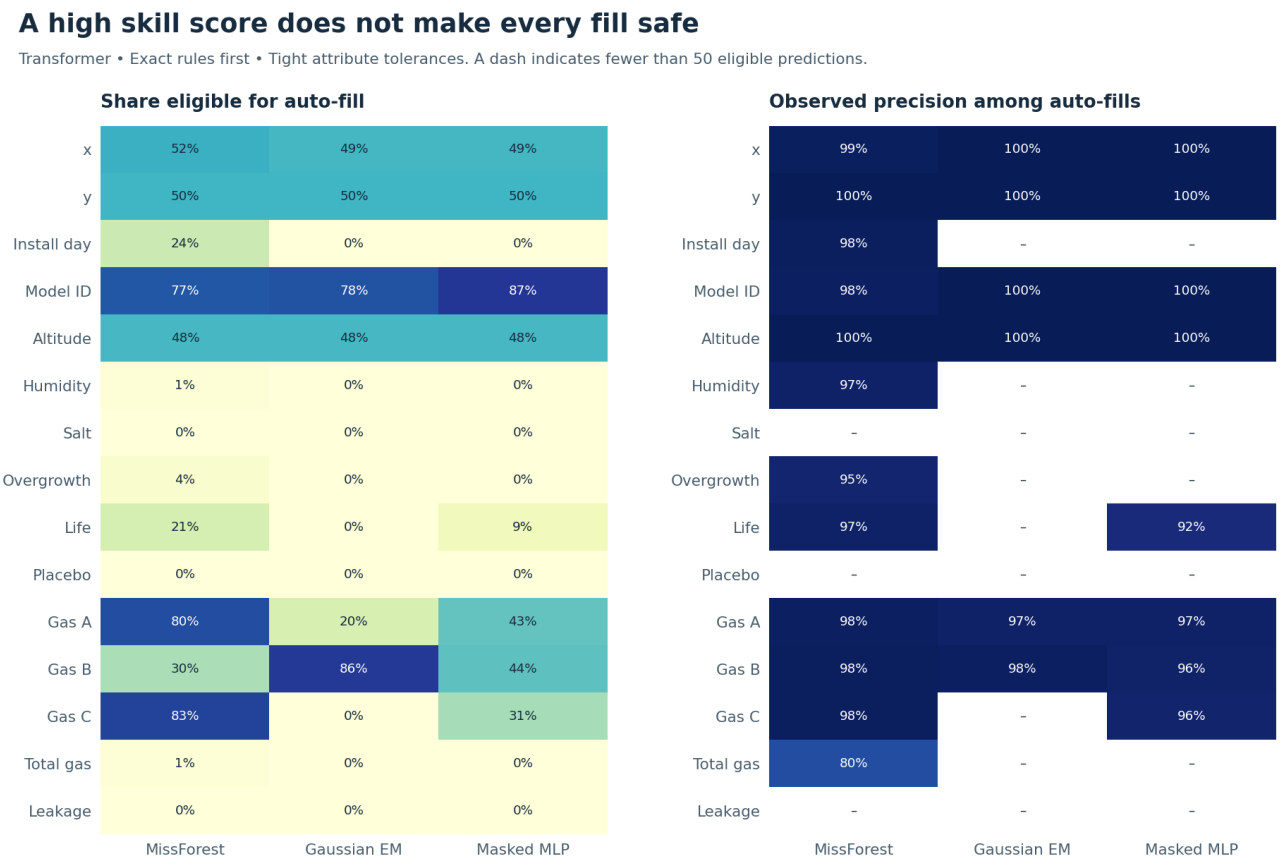


Figure 11. Eligibility versus observed precision. Read the eligible share and precision together. In the primary methods, every eligible y and altitude fill came from the exact rule; all eligible x fills for Gaussian EM and MLP were also exact. MissForest additionally proposed model-based x fills.

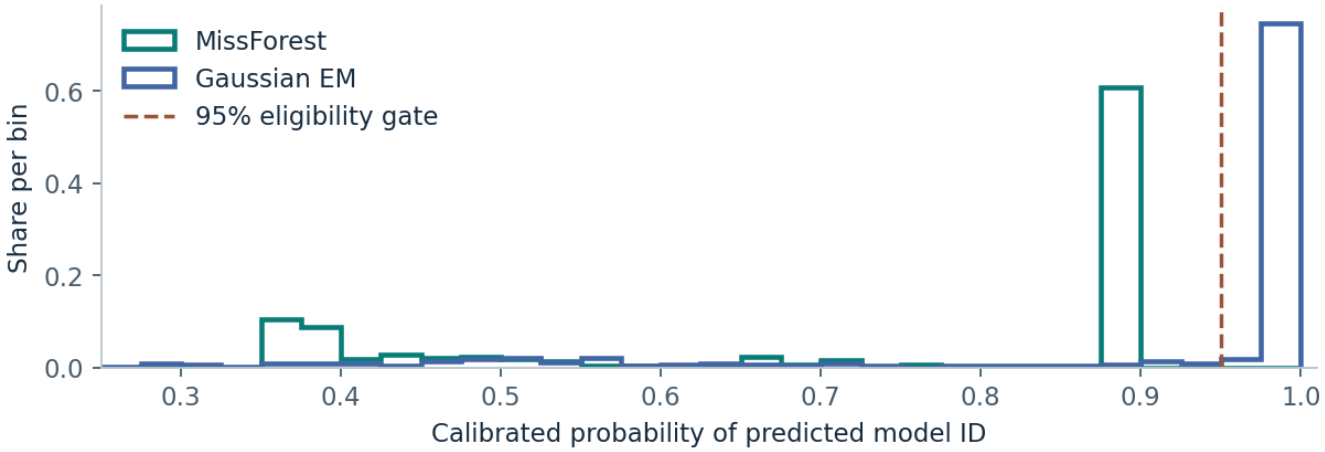


Figure 12. Top-class probabilities on the representative grouped split. On the exported 219/617 split, MissForest's maximum was 90.0%. Gaussian EM crossed the 95% gate on 447 of 584 gaps. Averaging trees can damp extreme probabilities, but this check cannot isolate the cause of the observed difference. See Niculescu-Mizil and Caruana (2005).

10. Distribution, downstream life, consistency and exact rules

Point-fill distribution metrics, rules first

Method	Mean hidden W_1 / train scale	Median spread ratio	Energy distance	Correlation MAE
Median / mode	0.746	0.00	0.066	0.075
Chained ridge	0.215	0.97	0.013	0.021
k-NN	0.257	0.80	0.017	0.017
MissForest	0.136	0.95	0.010	0.016
Gaussian EM	0.165	0.92	0.011	0.013
Masked MLP	0.206	0.89	0.014	0.015

Why. The Wasserstein values use one point per gap. Conditional point fills can narrow distributions and lose tail cases. The spread ratio and record-level association check show different effects.

Saved source — final/tables/distribution.csv and tables.csv.

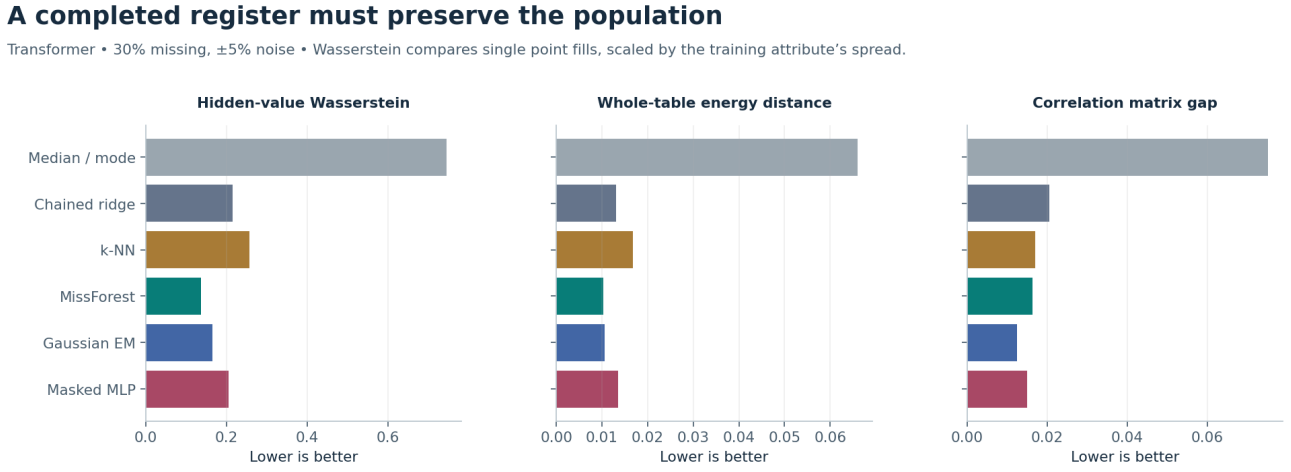


Figure 13. Distribution preservation under point filling. Compare hidden and completed distributions and the spread ratio. Completed tables include the preserved observations, which can make large changes among fills look smaller overall.

Downstream life with MissForest candidate features

Inputs	MAE	Spearman ρ	Lowest-life decile recall
Clean train / clean test	19.5	0.997	97.5%
Filled train / clean test	25.0	0.995	96.5%
Clean train / filled test	61.2	0.933	86.9%
Filled train / filled test	63.6	0.933	86.7%

Why. Filling errors can carry into life prediction even when most fields appear recoverable. The comparison keeps the training-label and model specification fixed and varies the feature inputs.

Saved source — final/tables/downstream.csv, rules first, transformer anchor.

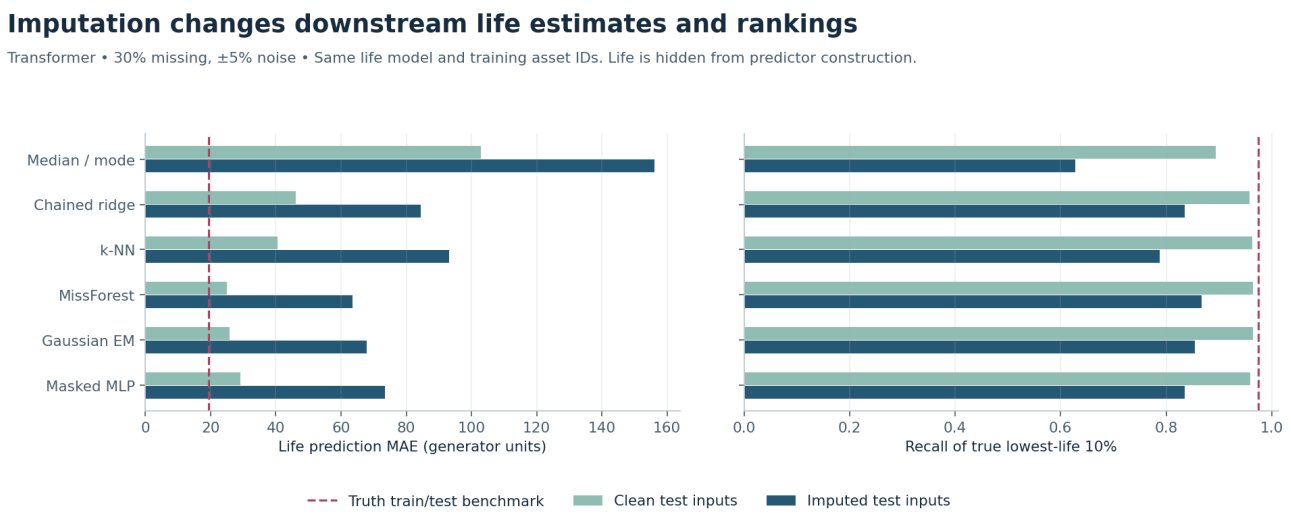


Figure 14. Downstream life and ranking. Compare clean and filled feature configurations before interpreting the lowest-life ranking. Synthetic life remains an evaluation outcome.

Record consistency — Zero noise

Method	Arm	Altitude loose / exact	Total gas loose / exact	Overgrowth loose / exact
MissForest	Model only	57.3% / 1.5%	100.0% / 0.0%	64.4% / 18.6%
MissForest	Rules first	81.8% / 67.3%	100.0% / 53.9%	88.8% / 72.3%
Gaussian EM	Model only	99.1% / 0.1%	98.8% / 0.0%	59.4% / 23.6%
Gaussian EM	Rules first	99.9% / 67.3%	99.0% / 53.9%	85.1% / 73.0%
Masked MLP	Model only	48.7% / 0.1%	99.9% / 0.0%	42.6% / 19.0%
Masked MLP	Rules first	78.0% / 67.3%	99.9% / 53.9%	76.2% / 69.8%

Why. Rates refer to records with a gap in a formula term. With clean inputs the exact rules can recover eligible identities; several missing terms can leave an identity underdetermined.

Saved source — final/tables/consistency.csv.

Record consistency — ±5% measurement noise

Method	Arm	Altitude loose / exact	Total gas loose / exact	Overgrowth loose / exact
MissForest	Model only	57.0% / 1.5%	99.9% / 0.0%	62.6% / 18.3%
MissForest	Rules first	81.8% / 67.3%	99.9% / 0.0%	62.8% / 18.4%
Gaussian EM	Model only	99.1% / 0.1%	96.4% / 0.0%	59.1% / 23.6%
Gaussian EM	Rules first	99.9% / 67.3%	96.3% / 0.0%	59.2% / 23.6%
Masked MLP	Model only	48.2% / 0.1%	99.6% / 0.0%	42.5% / 18.4%
Masked MLP	Rules first	77.1% / 67.3%	99.6% / 0.0%	43.9% / 19.1%

Why. With jitter, exact gas and environmental identities are disabled. Altitude remains deterministic if its two inputs are present. An accurate single-cell fill may still violate a formula when multiple fields are filled.

Saved source — final/tables/consistency.csv.

On rows with all terms observed at the noisy anchor, loose-tolerance agreement averaged 100.0% for altitude, 100.0% for total gas, 90.6% for overgrowth. This observed-only check separates measurement inconsistency from imputation effects.

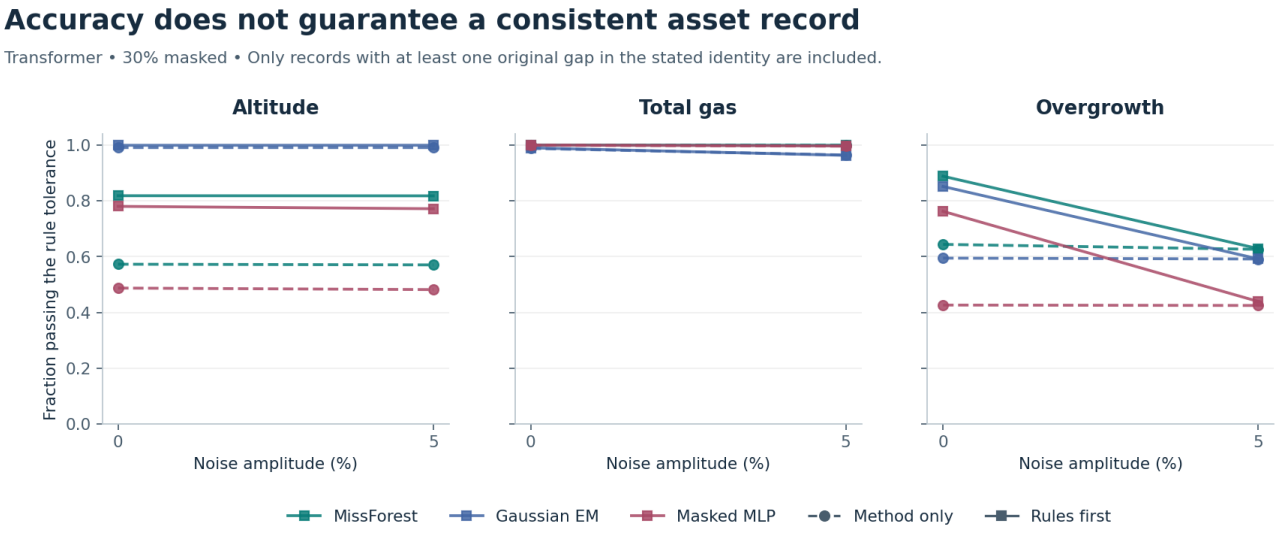


Figure 15. Formula consistency at zero and nonzero noise. Rules-first performance depends on which identities are safe to apply and which operands are present. The exact and tolerance-level results above distinguish exact recovery from approximate agreement.

MissForest rule contribution at the anchor

Slice	Direct contribution	Remaining contribution	Remaining MAE, model → rules
All numeric fields	+0.022	-0.021	—
Altitude	+0.094	-0.229	19.1 → 33.7 (2,813 gaps)

Why. Exact replacements help, but error on remaining cells offsets most of the gain. None of the remaining altitude test rows had a raw input changed by the rules. The deterioration lies in the fitted pipeline. **Observed; cause not established.**

Saved source — final-review/non_rule_errors.csv; final/tables/rule_effects.csv.

Geometry eligibility provenance, MissForest rules-first

Field	Eligible exact fills	Eligible model fills	Correct model fills
x	2,584	151	112
y	2,714	0	0
Altitude	2,645	0	0

Why. Exact geometry fills have a different provenance from a model estimate. The two types should be counted separately when assessing the gate.

Saved source — final-review/rule_vs_model_eligibility.csv.

Ablation of decay-corrected gases

Method	Without correction	With correction	Paired mean change
MissForest	0.657	0.656	-0.001
Gaussian EM	0.671	0.641	-0.030
Masked MLP	0.566	0.563	-0.003

Why. Feature construction can change the ranking. A flexible forest can already use the original signals, and the correction can change the representation in ways that affect each model differently.

Saved source — final/tables/macro_run_scores.csv, same anchor and matched pairs.

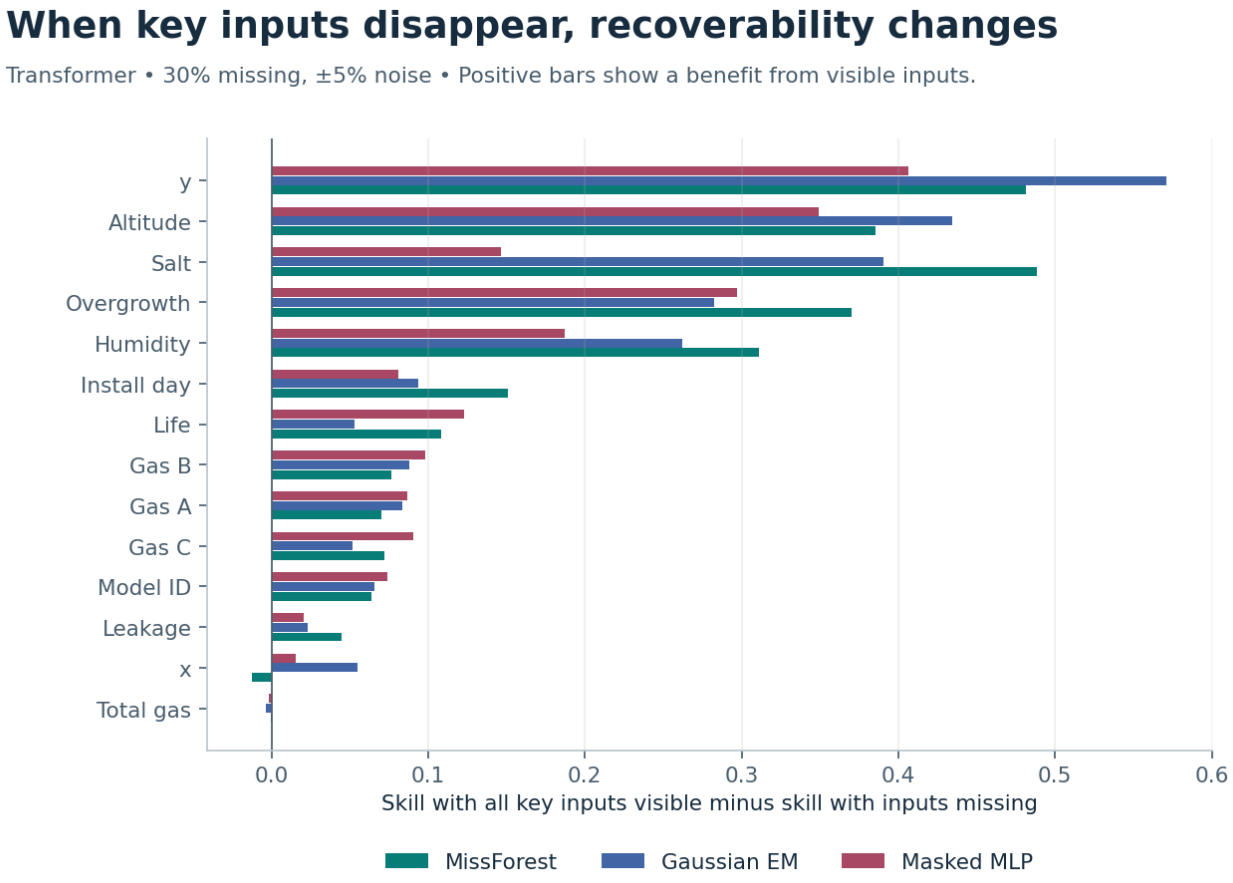


Figure 16. What happens when related inputs are unavailable. The contrast is conditional on which helper fields are actually visible. Use it alongside the deliberately grouped-gap experiment.

11. Screening values that are already recorded

Hide each recorded installation day or model ID in turn and predict it from the remaining measurements. Compare a recorded date with a calibrated numeric band. Compare a recorded class with the calibrated threshold on its predicted probability. Calibration uses verified clean examples. Match by key-input visibility and gap burden when support permits. Keep the recorded value until a flag is checked against an independent source.

Synthetic screening at the nominal 5% setting

Target	Method	Caught / injected	Recall	False-alarm rate	Flag precision
Installation day	MissForest	267 / 638	41.8%	4.9%	31.2%
Installation day	Gaussian EM	320 / 638	50.2%	5.4%	33.2%
Model ID	MissForest	225 / 234	96.2%	5.1%	26.3%
Model ID	Gaussian EM	226 / 234	96.6%	5.6%	24.6%

Why. Only a small fraction of records is wrong. A modest false-alarm rate applied to the much larger clean group can produce more false flags than true flags. Model codes are easier to detect here than plausible dates.

Saved source — failure-audit/tables/screening_operating_points.csv.

Suggested code-review pilot setting. Gaussian EM at nominal 1% caught 73.5% of swapped IDs with 68.0% precision and 0.7% observed false alarms. Use the flags for review after confirming access to verified clean reference values.

Date-shift replay at the nominal 5% setting

Method	Injected shift	Caught / candidates	Recall	Median clean band half-width
MissForest	60 days	267 / 638	41.8%	104 days
MissForest	120 days	345 / 638	54.1%	104 days
MissForest	180 days	396 / 638	62.1%	104 days
Gaussian EM	60 days	320 / 638	50.2%	64 days
Gaussian EM	120 days	517 / 638	81.0%	64 days
Gaussian EM	180 days	574 / 638	90.0%	64 days

Why. Sixty days can fit inside the calibrated band. The larger shifts were replayed on the same affected candidates using saved predictions and cutoffs, varying only the recorded date. The replay gives conditional sensitivity, rather than a new fit or a population-wide estimate.

Saved source — final-review/date_shift_replay.csv.

12. Overhead transfer and earlier SAPN-style pilot

The transfer withholds entire feeders and excludes feeder and segment IDs as predictors. The prepared overhead pairs have a separate noise convention. The analysis caps imputed installation years at the 2014 snapshot, rounds to integer years before scoring and uses an inclusive age-50 threshold. Observed years are preserved.

Overhead transfer at 30% supplied noise

Field	Best method by defined skill	Best skill	MissForest metric
Corrosion zone	MissForest	0.453	Skill 0.453
Covering	—	—	Macro-F1 0.523
Distance to sea km	MissForest	0.090	Skill 0.090
Installation year	Median / mode	0.000	Skill -0.038
Length km	Median / mode	0.000	Skill -0.015
Location group	Median / mode	0.000	Skill -0.088
Material	Median / mode	0.000	Skill -0.052
Voltage category	Median / mode	0.000	Skill -0.008

Why. Only 1 of 7 fields with defined skill reached 0.10. Covering has a near-perfect modal floor and is better read through macro-F1. The weak material result is consistent with the overwhelming modal steel class.

Saved source — final/tables/cells.csv, overhead20-n30.

Overhead numeric skill across supplied noise levels

Scenario	Floor	Ridge	k-NN	Forest	EM	MLP
overhead20-n00	0.000	0.096	0.047	0.113	0.116	0.125
overhead20-n10	0.000	0.055	0.004	0.069	0.070	0.078
overhead20-n30	0.000	0.013	-0.028	0.013	0.015	0.013
overhead20-n50	0.000	-0.013	-0.054	-0.023	-0.012	-0.013

Why. Group holdout removes direct feeder memorisation. Stable aggregate skill may still conceal year error or distortion in the age tail.

Saved source — final/tables/macro_run_scores.csv.

The filled share aged 50 or older moved by +0.89 percentage points for MissForest at 30% supplied noise. The early synthetic overhead pilot used feeder ID as a predictor, so its results answer a different question. The saved Subteam C pilot is contextual evidence and no live SAPN register result is claimed here.

Earlier synthetic pilot, clean-noise installation year

Method	MAE, years	Skill vs pilot median
Median	10.39	0.000
Random Forest	10.88	-0.047
IterativeImputer	10.57	-0.018
CatBoost	10.63	-0.023

Why. The pilot uses a different protocol and provides historical context. The near-floor year result motivates the stricter feeder holdout and the explicit age-share check.

Saved source — Subteam C overhead study, run 20261107-015341, numeric_scores.csv.

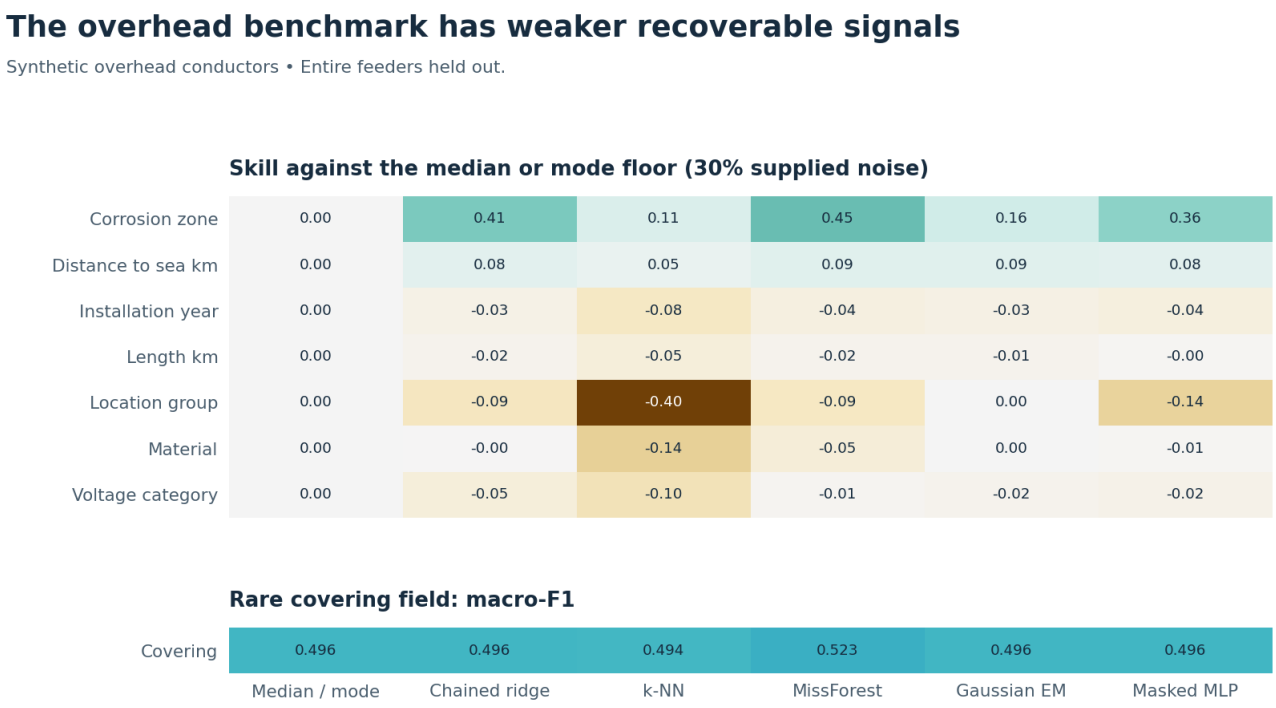


Figure 17. Feeder-held-out overhead transfer. Check each field separately. Covering is plotted with macro-F1, while other displayed results use the stated floor-relative metric.

13. Robustness, tuning, verification and targeted checks

Break-rate sensitivity at the anchor

Skill cutoff	Required within loose tolerance	Fail skill	Fail tolerance	Fail either / evaluated
0.05	40%	0	36	36 / 126
0.05	50%	0	44	44 / 126
0.05	60%	0	50	50 / 126
0.10	40%	1	36	37 / 126
0.10	50%	1	44	45 / 126
0.10	60%	1	50	50 / 126
0.20	40%	9	36	45 / 126
0.20	50%	9	44	53 / 126
0.20	60%	9	50	54 / 126

Why. Separating the criteria shows whether the skill cutoff or the tolerance requirement is driving the break label.

Saved source — final/tables/break_sensitivity.csv.

Life gate sensitivity, rules first

Method	Within ±100	Eligible ±100	Precision ±100	Lowest pair ±100	Within ±500
MissForest	71.0%	20.7%	96.8%	94.3%	98.4%
Gaussian EM	46.1%	0.0%	—	—	97.8%
Masked MLP	60.2%	9.1%	92.4%	66.7%	98.4%

Why. The absolute limits keep the synthetic offset from making acceptance too generous. The MLP's lowest precision is sensitive to a small number of eligible fills.

Saved source — final/tables/life_tolerance_sensitivity.csv.

The MLP's lowest tight-tolerance life precision was 12/18 on generator 220, split 617. The teaching SVM selected C = 100 with test macro-F1 0.949. This was the largest searched C, so the optimum beyond the grid is unknown.

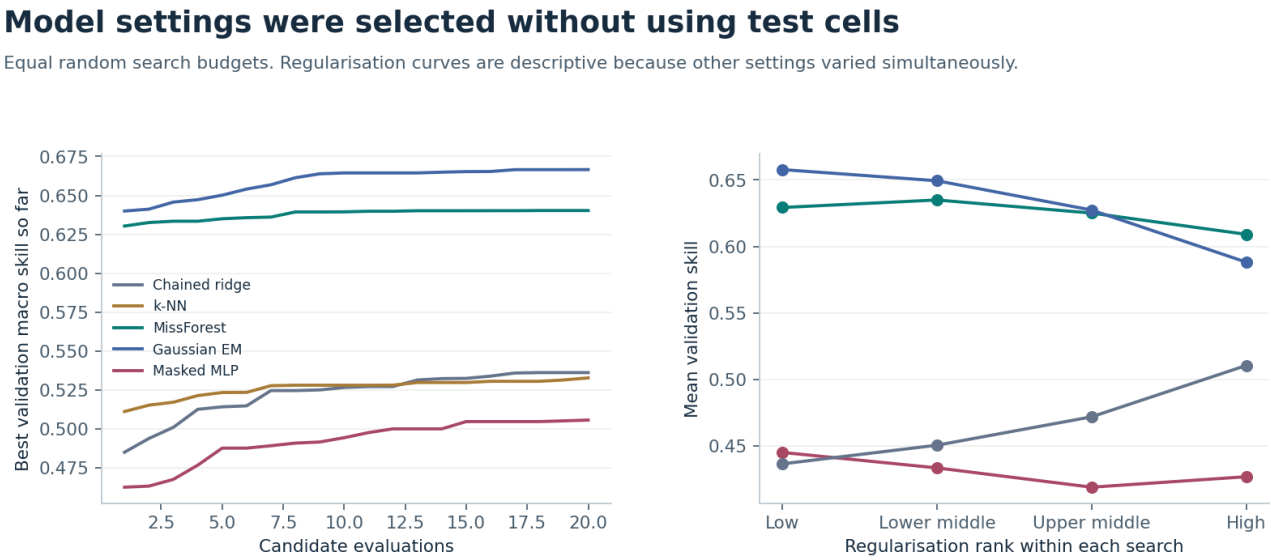


Figure 18. Matched tuning budgets and selected settings. The search compares model settings on tuning blocks. The plot shows search variability and cost at the original anchor.

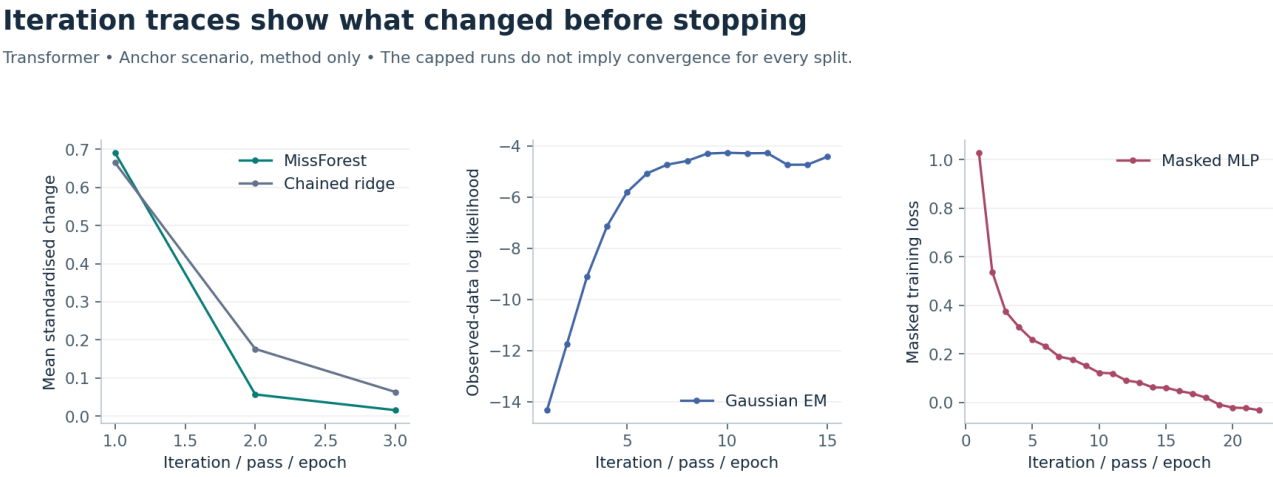


Figure 19. Iteration and training traces. The traces show what changed before the fixed or early stopping points. The runs do not establish convergence for every split.

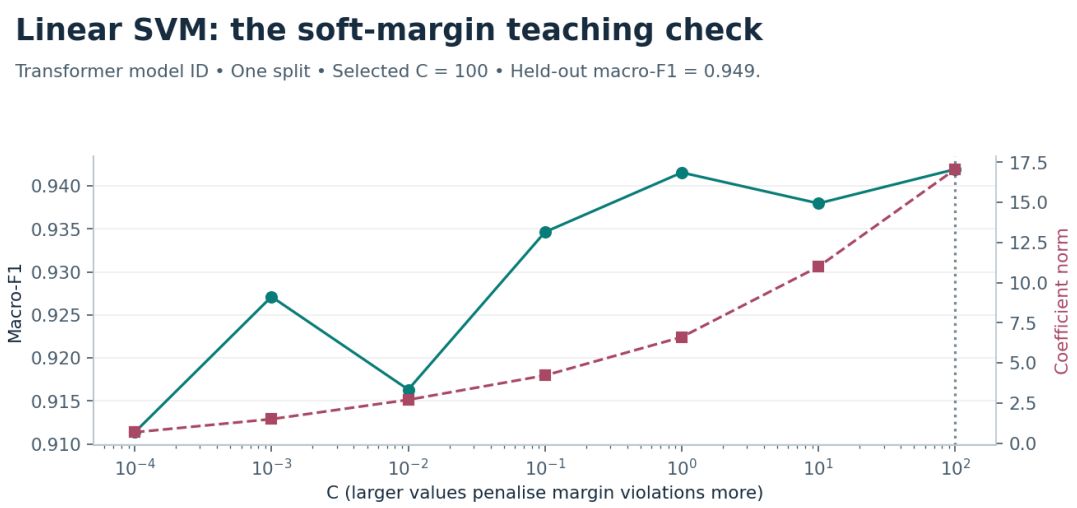


Figure 20. Soft-margin SVM teaching check. The vertical line marks the validation-selected C = 100, at the upper search boundary. This teaching exercise is separate from the main imputer ranking.

Archived results reproduced by the package verifier

Run	Tasks	Exports	Hidden cells	Tuning trials	Screening rows
final	123	192	1,495,404	900	—
anchor-stress	18	24	216,780	0	—
anchor-diagnostics	171	57	136,005	0	—
failure-audit	9	2	17,996	0	50,440

Why. The verifier recomputes scores from the original measured values, candidate ledgers and truth. It checks preserved observations, partitions, tolerances and decision flags. The separate raw-task check reproduced the full-run counts without renderer-generated CSVs.

Saved source — each archived run verification.json; packaging verification.

The test suite passed all 32 tests. This includes source reproducibility, block isolation, rule safety, scenario masking, preservation of observations, uncertainty, and screening thresholds. A fresh smoke run verified four task outputs using task JSON and ledgers alone.

14. Limitations

The transformer results use one generator family with designed masks and errors. Spatial installation order and exact identities can make recovery easier than on live SAPN records, where both imputation and screening still need validation. The overhead transfer is synthetic and uses a different noise convention. Its earlier feeder-aware pilot answers a different question.

Main settings were tuned at 30% MCAR. The grouped MLP correction is retrospective. The original tuning blocks support it, while a prospective validation remains open. The crossed design has few independent seeds. Coarse calibration can leave specific patterns below target, and screening requires verified clean examples.

For MissForest’s residual altitude loss, **observed; cause not established**. The model-ID probability plot describes one split, and its shape alone cannot explain the scores. Screening covers the injected codes and date shifts tested here.

15. Findings and conclusions

When can missing records be recovered?

Recovery is strongest when measured helper fields survive and the evaluation matches the conditions expected in use. The scattered-gap anchor supports selective recovery for fields such as model ID and gas values. High average skill can coexist with low confidence for a particular field or pattern. Exact rules should be audited separately from model-based recovery so their provenance and reliability are visible.

Three practical causes of failure. First, related fields can disappear together, eliminating the inputs needed for formulas and learned relationships. Second, weakly informative or noisy inputs can leave a prediction close to the median or produce a wide interval even when a method beats the baseline. Third, a wrong value that remains visible can propagate into multiple fills on the same row. The structural-error cohort shows why checking recorded values and filling missing values are separate tasks.

Field verdicts at the rules-first anchor

Field	Point leader	Skill	Benchmark candidate	Eligible	Precision	Suggested treatment
x	Gaussian EM	0.945	MissForest	51.7%	98.6%	Auto-fill confident cases and review the rest
y	Gaussian EM	0.692	Masked MLP	50.1%	100.0%	Auto-fill confident cases and review the rest
Installation day	Gaussian EM	0.935	MissForest	23.8%	98.3%	Auto-fill confident cases and review the rest
Model ID	MissForest	0.950	Masked MLP	86.5%	99.7%	Auto-fill confident cases and review the rest
Altitude	Gaussian EM	0.764	Masked MLP	48.5%	100.0%	Auto-fill confident cases and review the rest
Humidity	MissForest	0.581	MissForest	1.1%	96.7%	Review. Very few cases qualify.
Salt	MissForest	0.349	—	—	—	Review and leave gaps when supporting inputs are missing
Overgrowth	MissForest	0.684	MissForest	3.8%	95.0%	Review. Very few cases qualify.
Life	MissForest	0.679	MissForest	20.7%	96.8%	Use the ±100 unit gate for eligible cases
Placebo	—	—	—	—	—	Leave blank
Gas A	MissForest	0.842	MissForest	79.9%	97.9%	Auto-fill confident cases and review the rest
Gas B	MissForest	0.816	Gaussian EM	85.5%	97.8%	Auto-fill confident cases and review the rest
Gas C	MissForest	0.817	MissForest	83.3%	98.2%	Auto-fill confident cases and review the rest
Total gas	MissForest	0.775	—	—	—	Review and leave gaps when supporting inputs are missing
Leakage	Gaussian EM	0.141	—	—	—	Review and leave gaps when supporting inputs are missing

Why. This is a retrospective eligibility comparison. Geometry precision is mostly attributable to exact rules. Humidity and overgrowth go to review because few cases qualify. Review unvalidated patterns even for fields with an eligible benchmark candidate.

Saved source — final/tables/attribute_guidance.csv.

Method guidance and a SAPN pilot

Which method to use under each kind of evidence

Situation	Method or policy	Reason
Scattered transformer gaps with measured clues	Benchmark MissForest and Gaussian EM	The leader changes with the feature set; compare on paired blocks and field error.
Related fields go missing together	Benchmark a grouped-trained MLP and Gaussian EM	The grouped MLP led the matched test pairs; Gaussian EM was competitive. Route wide bands to abstention.
Exact geometry identity has valid inputs	Use the rule and label its provenance	Exact fills and model-generated fills have different error guarantees in this synthetic design.
Model code looks suspicious	Gaussian EM, nominal 1% pilot screen	Prioritise source verification and retain the recorded value until checked.
Overhead installation age and weak-signal fields	Use the floor as a comparison; route to review	Feeder-held-out evidence is weak and the acceptable year error is provisional.

Why. The safest workflow depends on the field, the missingness pattern and the intended use. Apply separate checks for point accuracy, pattern coverage and false alarms.

Saved source — final/tables/cells.csv and macro_run_scores.csv; failure-audit/tables/mean_numeric_skill_by_pair.csv and screening_operating_points.csv.

Recommendations. Record which fields are missing together. Benchmark candidate methods on verified records with feeder or location holdouts. Route wide intervals, unsupported patterns and unvalidated tolerances to review. Audit high-impact observed fields separately. Track false alarms, precision and review capacity by field before widening deployment.

Questions for SAPN. Which assets and fields are in scope? How often do individual fields and whole sections go missing? Which recording errors recur and what source can verify a flagged value? What tolerances apply by field and use case, including whether ±5 years is acceptable for overhead installation year?

Predictions versus results

What changed after testing

Earlier prediction	Outcome	Saved evidence
MissForest leads with decay-corrected gases	Supported for the feature-enabled anchor	MissForest 0.656 versus Gaussian EM 0.641. Without the correction, Gaussian EM 0.671 versus MissForest 0.657.
Gaussian EM is strong on sums and equipment model structure	Partly supported	With rules first it led on x, y, installation day and altitude. Its total-gas skill was 0.756 versus 0.775 for MissForest.
The masked MLP holds up best at high independent missingness	Rejected in the 70% MCAR test	Gaussian EM 0.345 versus MLP 0.288.
Matching training masks helps the grouped MLP	Supported in retrospective follow-up	Grouped MLP 0.453 versus Gaussian EM 0.435.
Decay-corrected gas features improve the leader	Rejected for anchor MissForest	With minus without correction -0.001.
Calibration needs pattern information	Supported	Worst MissForest coverage moved from 26.4% raw to 73.2% pattern-aware.
Gaussian EM starts with stronger uncertainty coverage	Supported on average	Raw supported-pattern coverage was 95.9% for EM and 75.9% for MissForest.
Overhead has a low recoverability ceiling	Supported	1 of 7 fields with defined skill reach 0.10 at 30% supplied noise.

Why. The protocol matters for both rankings and confidence. A method can win for scattered gaps, lose for grouped gaps and still have a useful role in a separate screen for wrong recorded values.

Saved source — final/tables/macro_run_scores.csv, cells.csv, patterns.csv; failure-audit/tables/mean_numeric_skill_by_pair.csv.

References

1 Subteam C, Team 19. *SyntheticDataset.ipynb*, transformer generator and supplied clean/measured pairs.

2 Team 19, Subteams A and C. Prepared synthetic overhead conductor pairs and saved Subteam C overhead pilot.

3 SA Power Networks. *Asset Management Plan 3.1.10, Overhead Conductor, 2014 to 2025*. Australian Energy Regulator publication.

4 Stekhoven, D. J., and Bühlmann, P. (2012). MissForest: non-parametric missing value imputation for mixed-type data. *Bioinformatics*.

5 Du, T., Melis, L., and Wang, T. (2024). ReMasker: Imputing tabular data with masked autoencoding. *ICLR*.

6 Zaffran, M., et al. (2023). Conformal Prediction with Missing Values. *ICML*.

7 Niculescu-Mizil, A., and Caruana, R. (2005). Predicting Good Probabilities with Supervised Learning. *ICML*.