



## CH340G Programmer Circuit From Another PCB

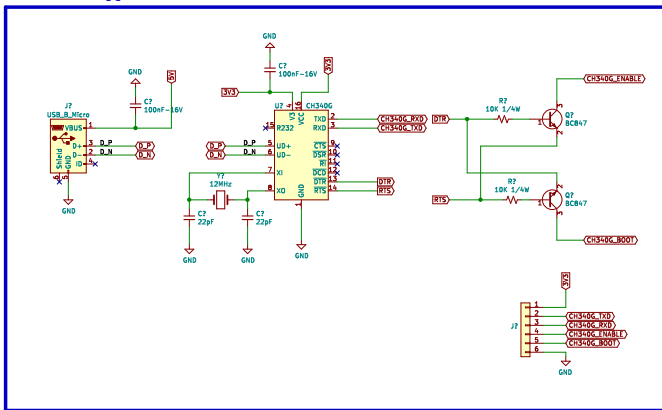

The pin 5, Which is in Programmer pins,  
Not using due to ESP32's CP210X not working!  
On Program time: hold the boot button  
inside the ESP32\_DEVKITC.

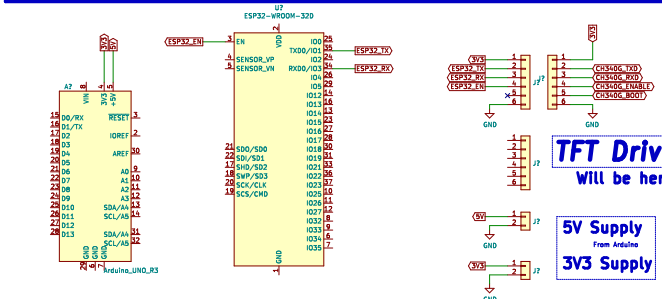

## Programmer Pins

## TFT Driver Controller Brightness and Color Adjustable

Will be here soon. Pls await until another revise.

5V Supply  
From Arduino  
3V3 Supply

The CH340G(internal programmer) designed not correct. So the circuit need 3V3.

MCU:ESP32	
TFT Display Test Kit	
Engineering Design	
Sheet: /	
File: NORA_MINI.sch	
Title: NETELSAN / Internship	
Size: User: 1	Date: 2023-08-15
Kicad E.D.A. Kicad (5.1.12)-1	Rev: V1.0
	Id: 1/1