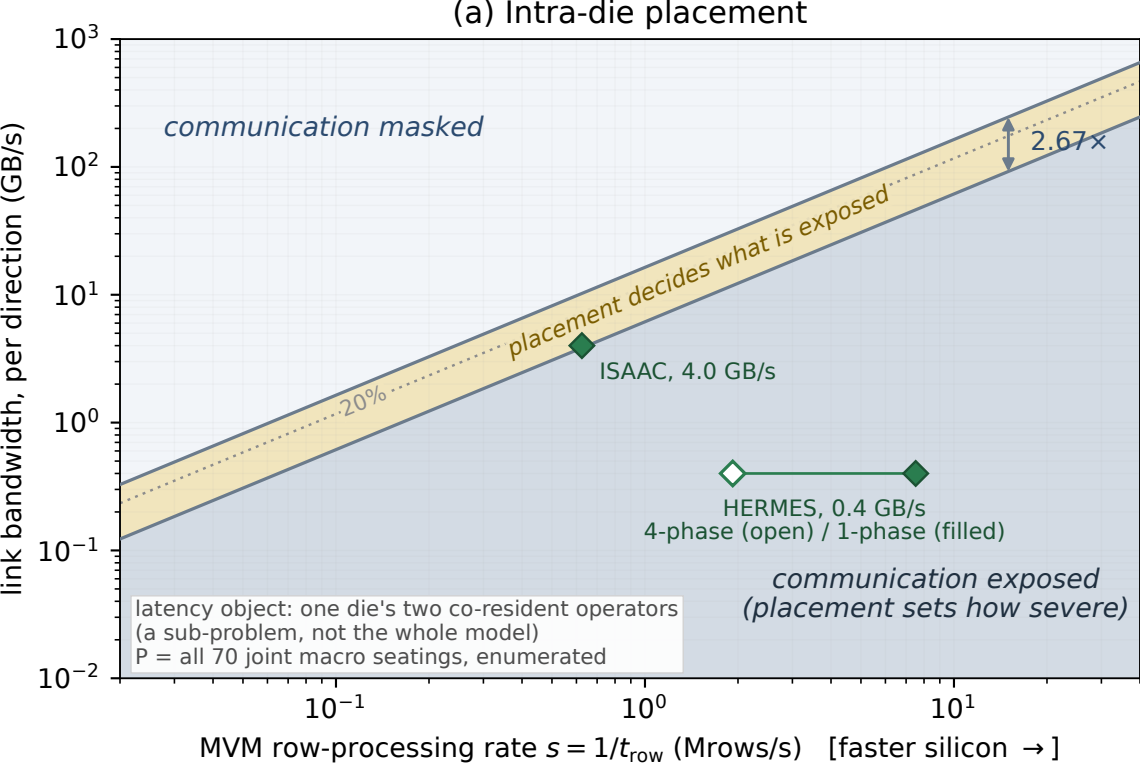
(a) Intra-die placement
communication masked
2.67×
placement decides what is exposed
20%
ISAAC, 4.0 GB/s
HERMES, 0.4 GB/s
4-phase (open) / 1-phase (filled)
communication exposed
(placement sets how severe)
latency object: one die's two co-resident operators
(a sub-problem, not the whole model)
P = all 70 joint macro seatings, enumerated
link bandwidth, per direction (GB/s)
MVM row-processing rate $s = 1/t_{\text{row}}$ (Mrows/s) [faster silicon →]