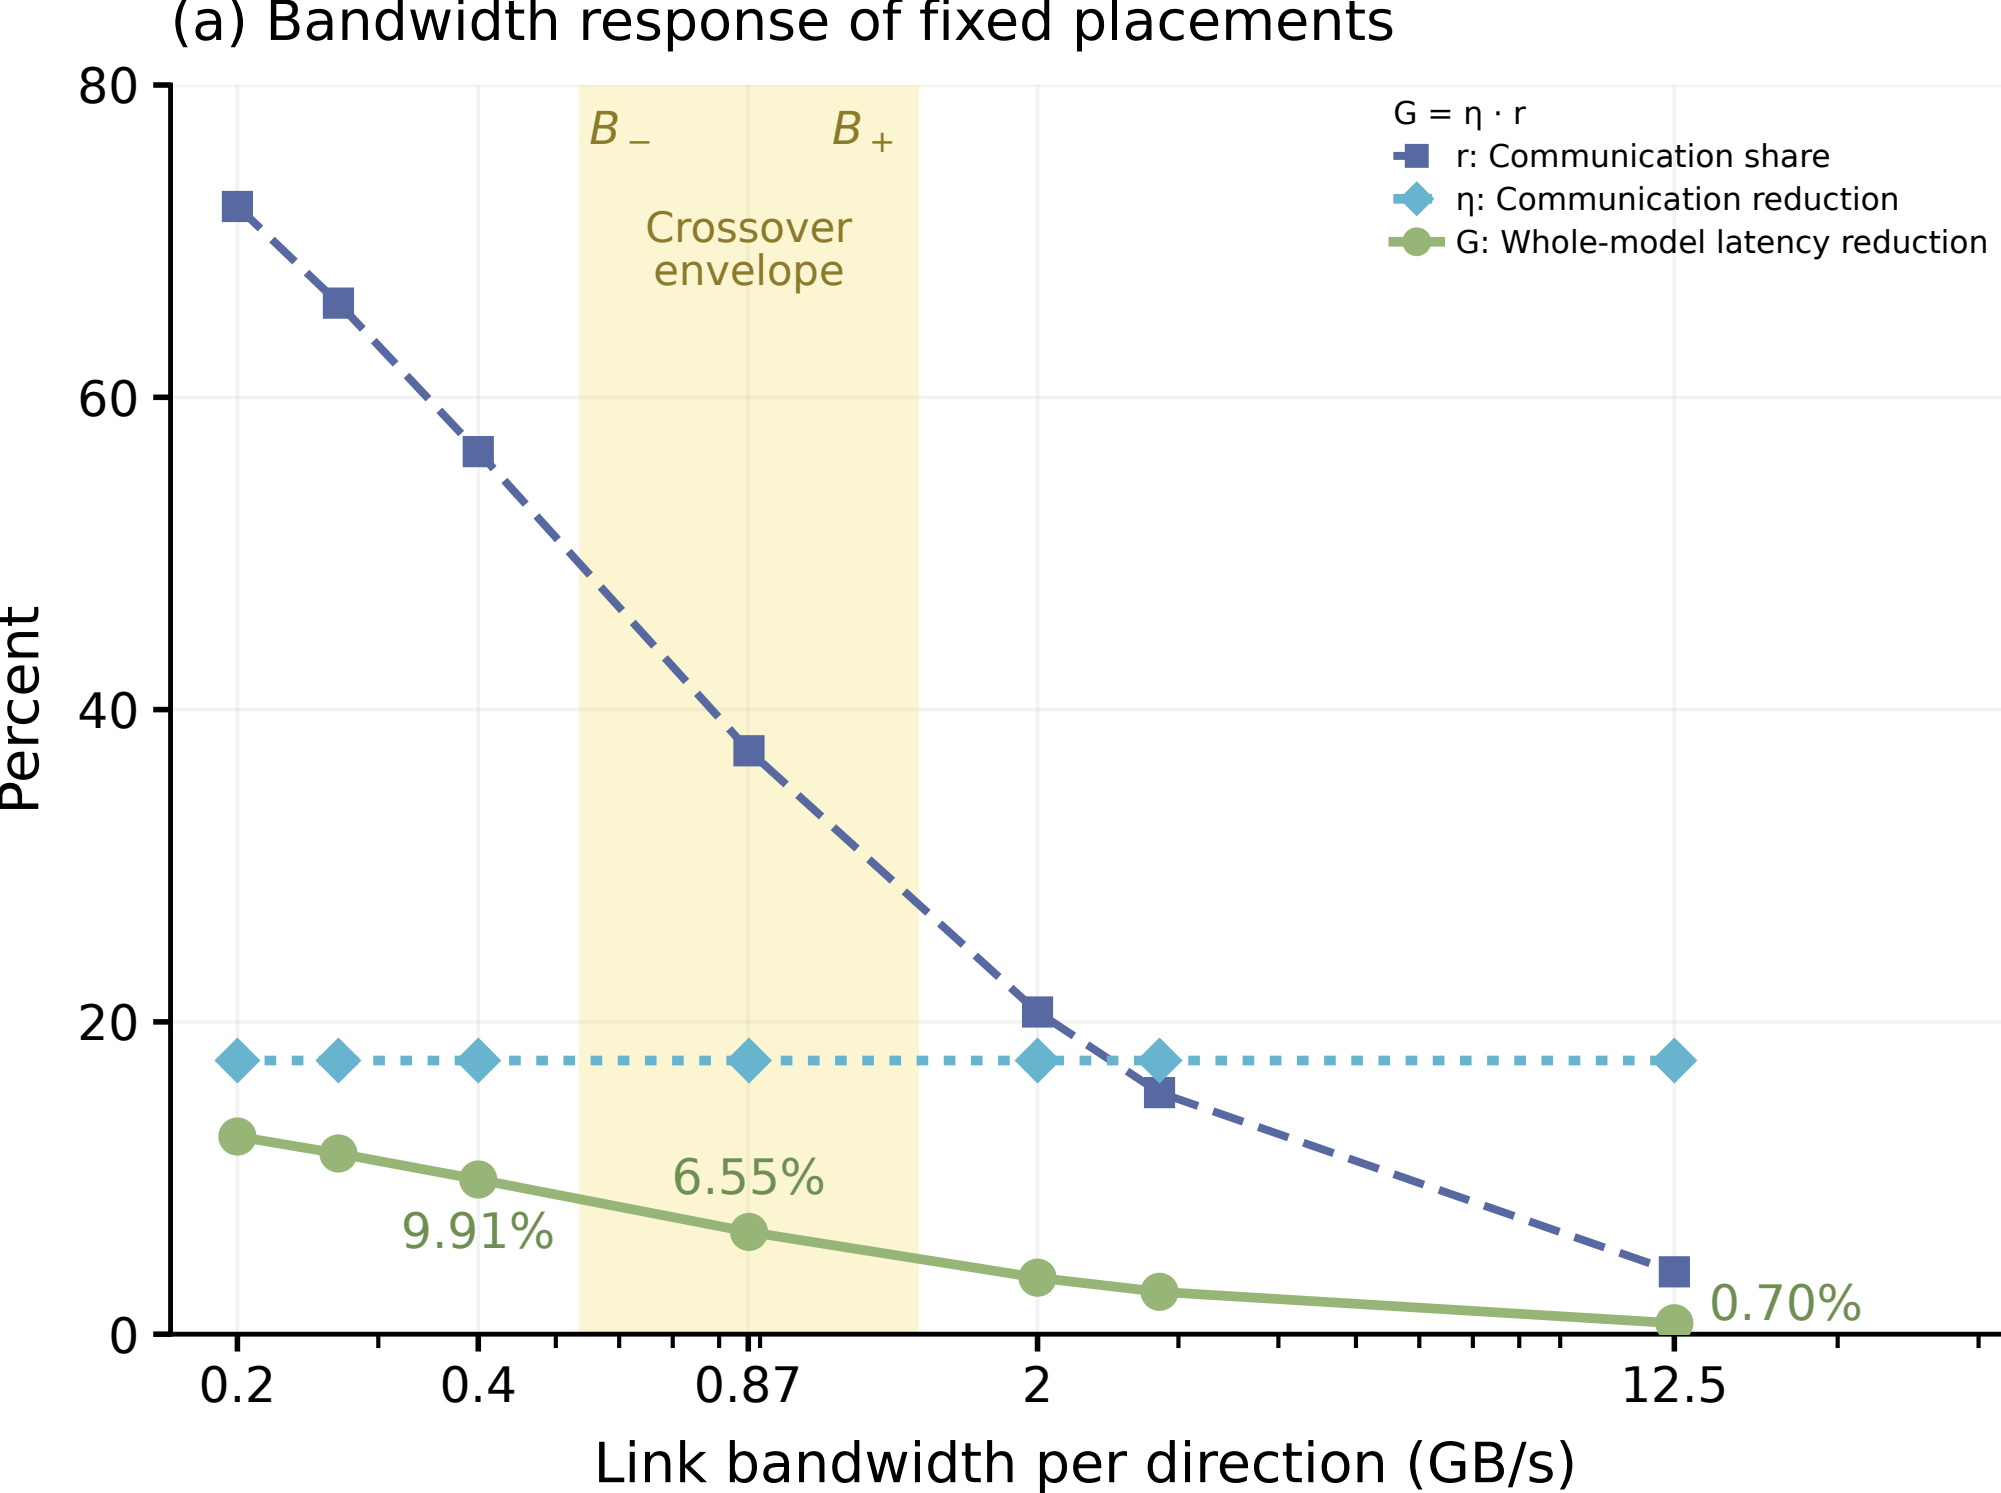
(a) Bandwidth response of fixed placements
80
60
40
20
0
Percent
B_-
B_+
Crossover envelope
G = η · r
r: Communication share
η: Communication reduction
G: Whole-model latency reduction
9.91%
6.55%
0.70%
0.2
0.4
0.87
2
12.5
Link bandwidth per direction (GB/s)