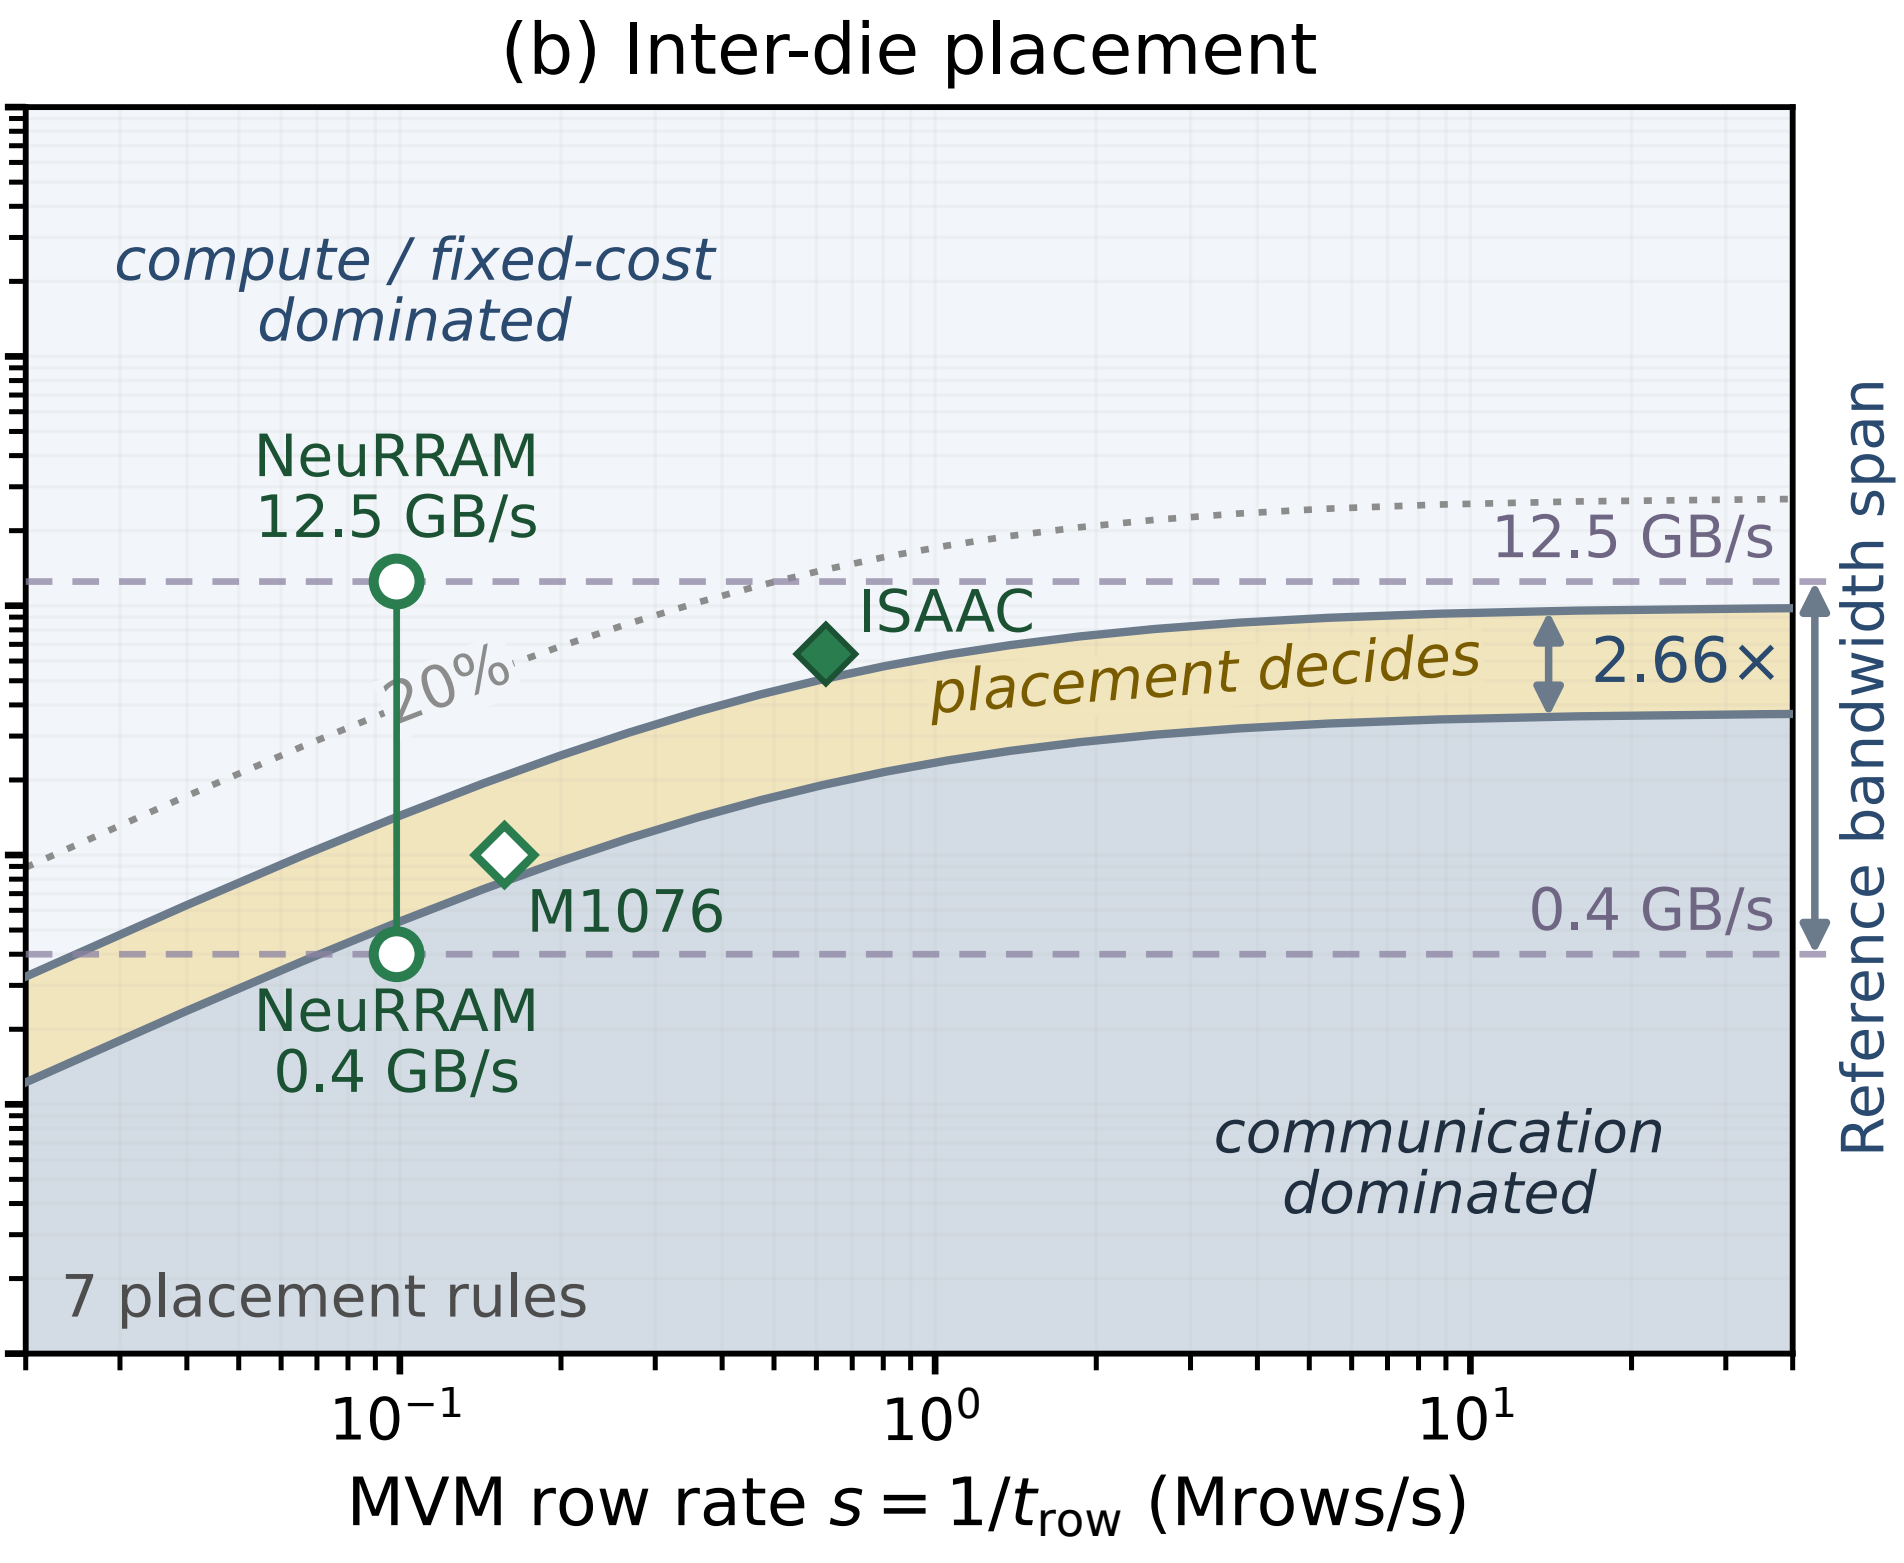
(b) Inter-die placement
compute / fixed-cost dominated
NeuRRAM 12.5 GB/s
12.5 GB/s
20%
ISAAC
placement decides
2.66×
M1076
0.4 GB/s
NeuRRAM 0.4 GB/s
communication dominated
7 placement rules
Reference bandwidth span
$10^{-1}$
$10^{0}$
$10^{1}$
MVM row rate $s = 1/t_{\text{row}}$ (Mrows/s)