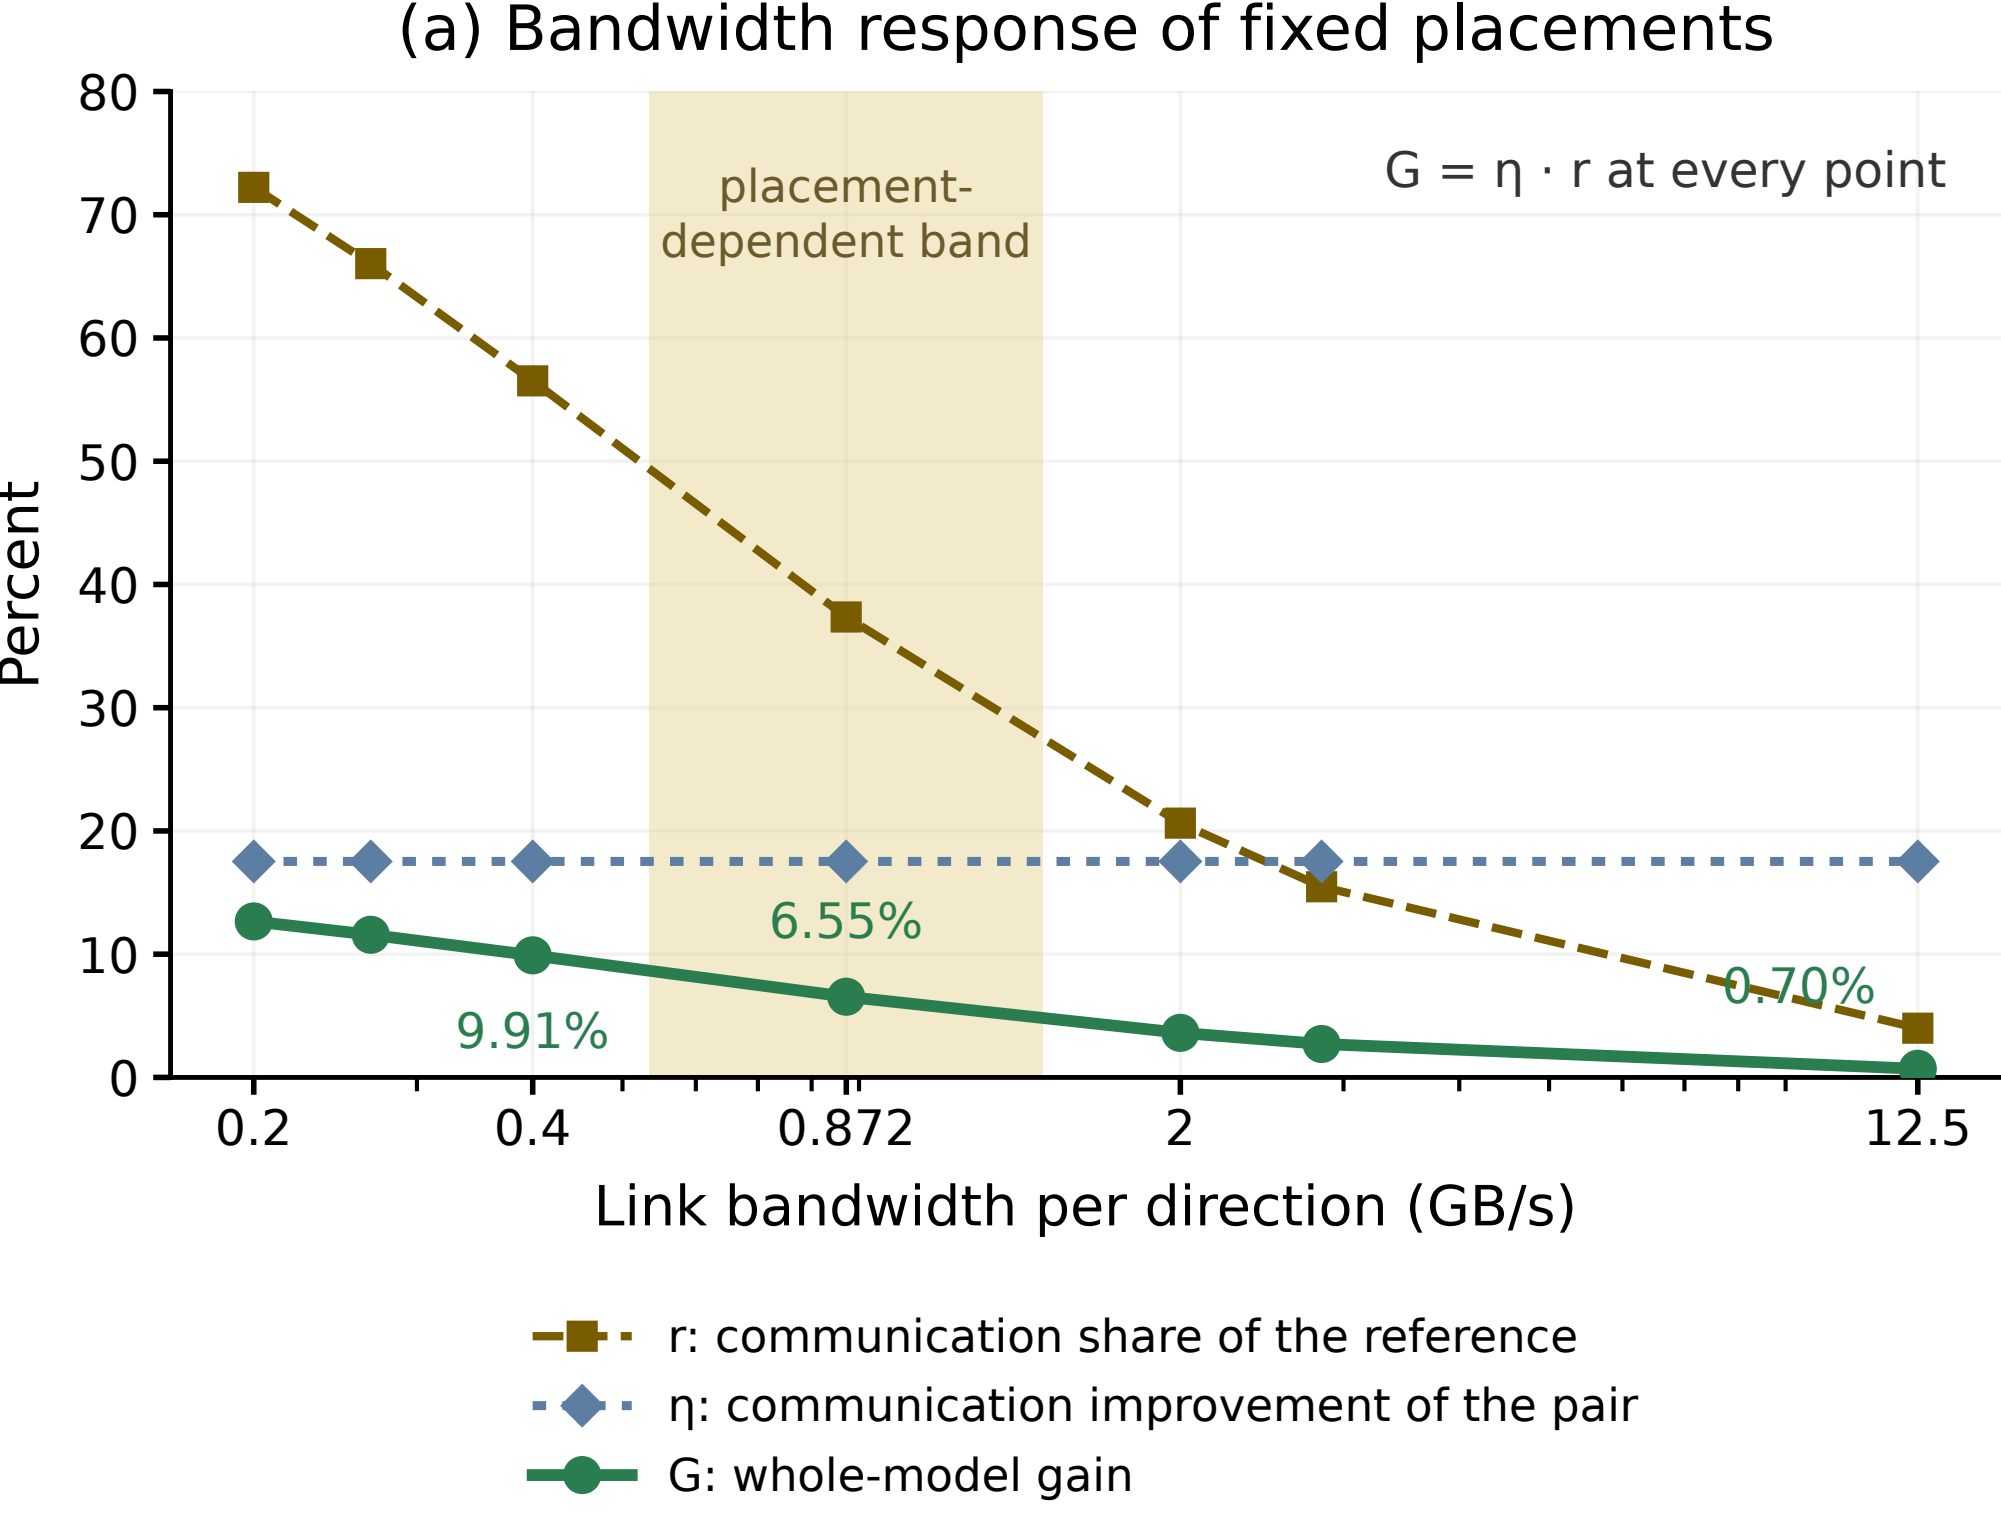
(a) Bandwidth response of fixed placements
G = η · r at every point
placement-
dependent band
6.55%
9.91%
0.70%
Percent
80
70
60
50
40
30
20
10
0
0.2
0.4
0.872
2
12.5
Link bandwidth per direction (GB/s)
r: communication share of the reference
η: communication improvement of the pair
G: whole-model gain