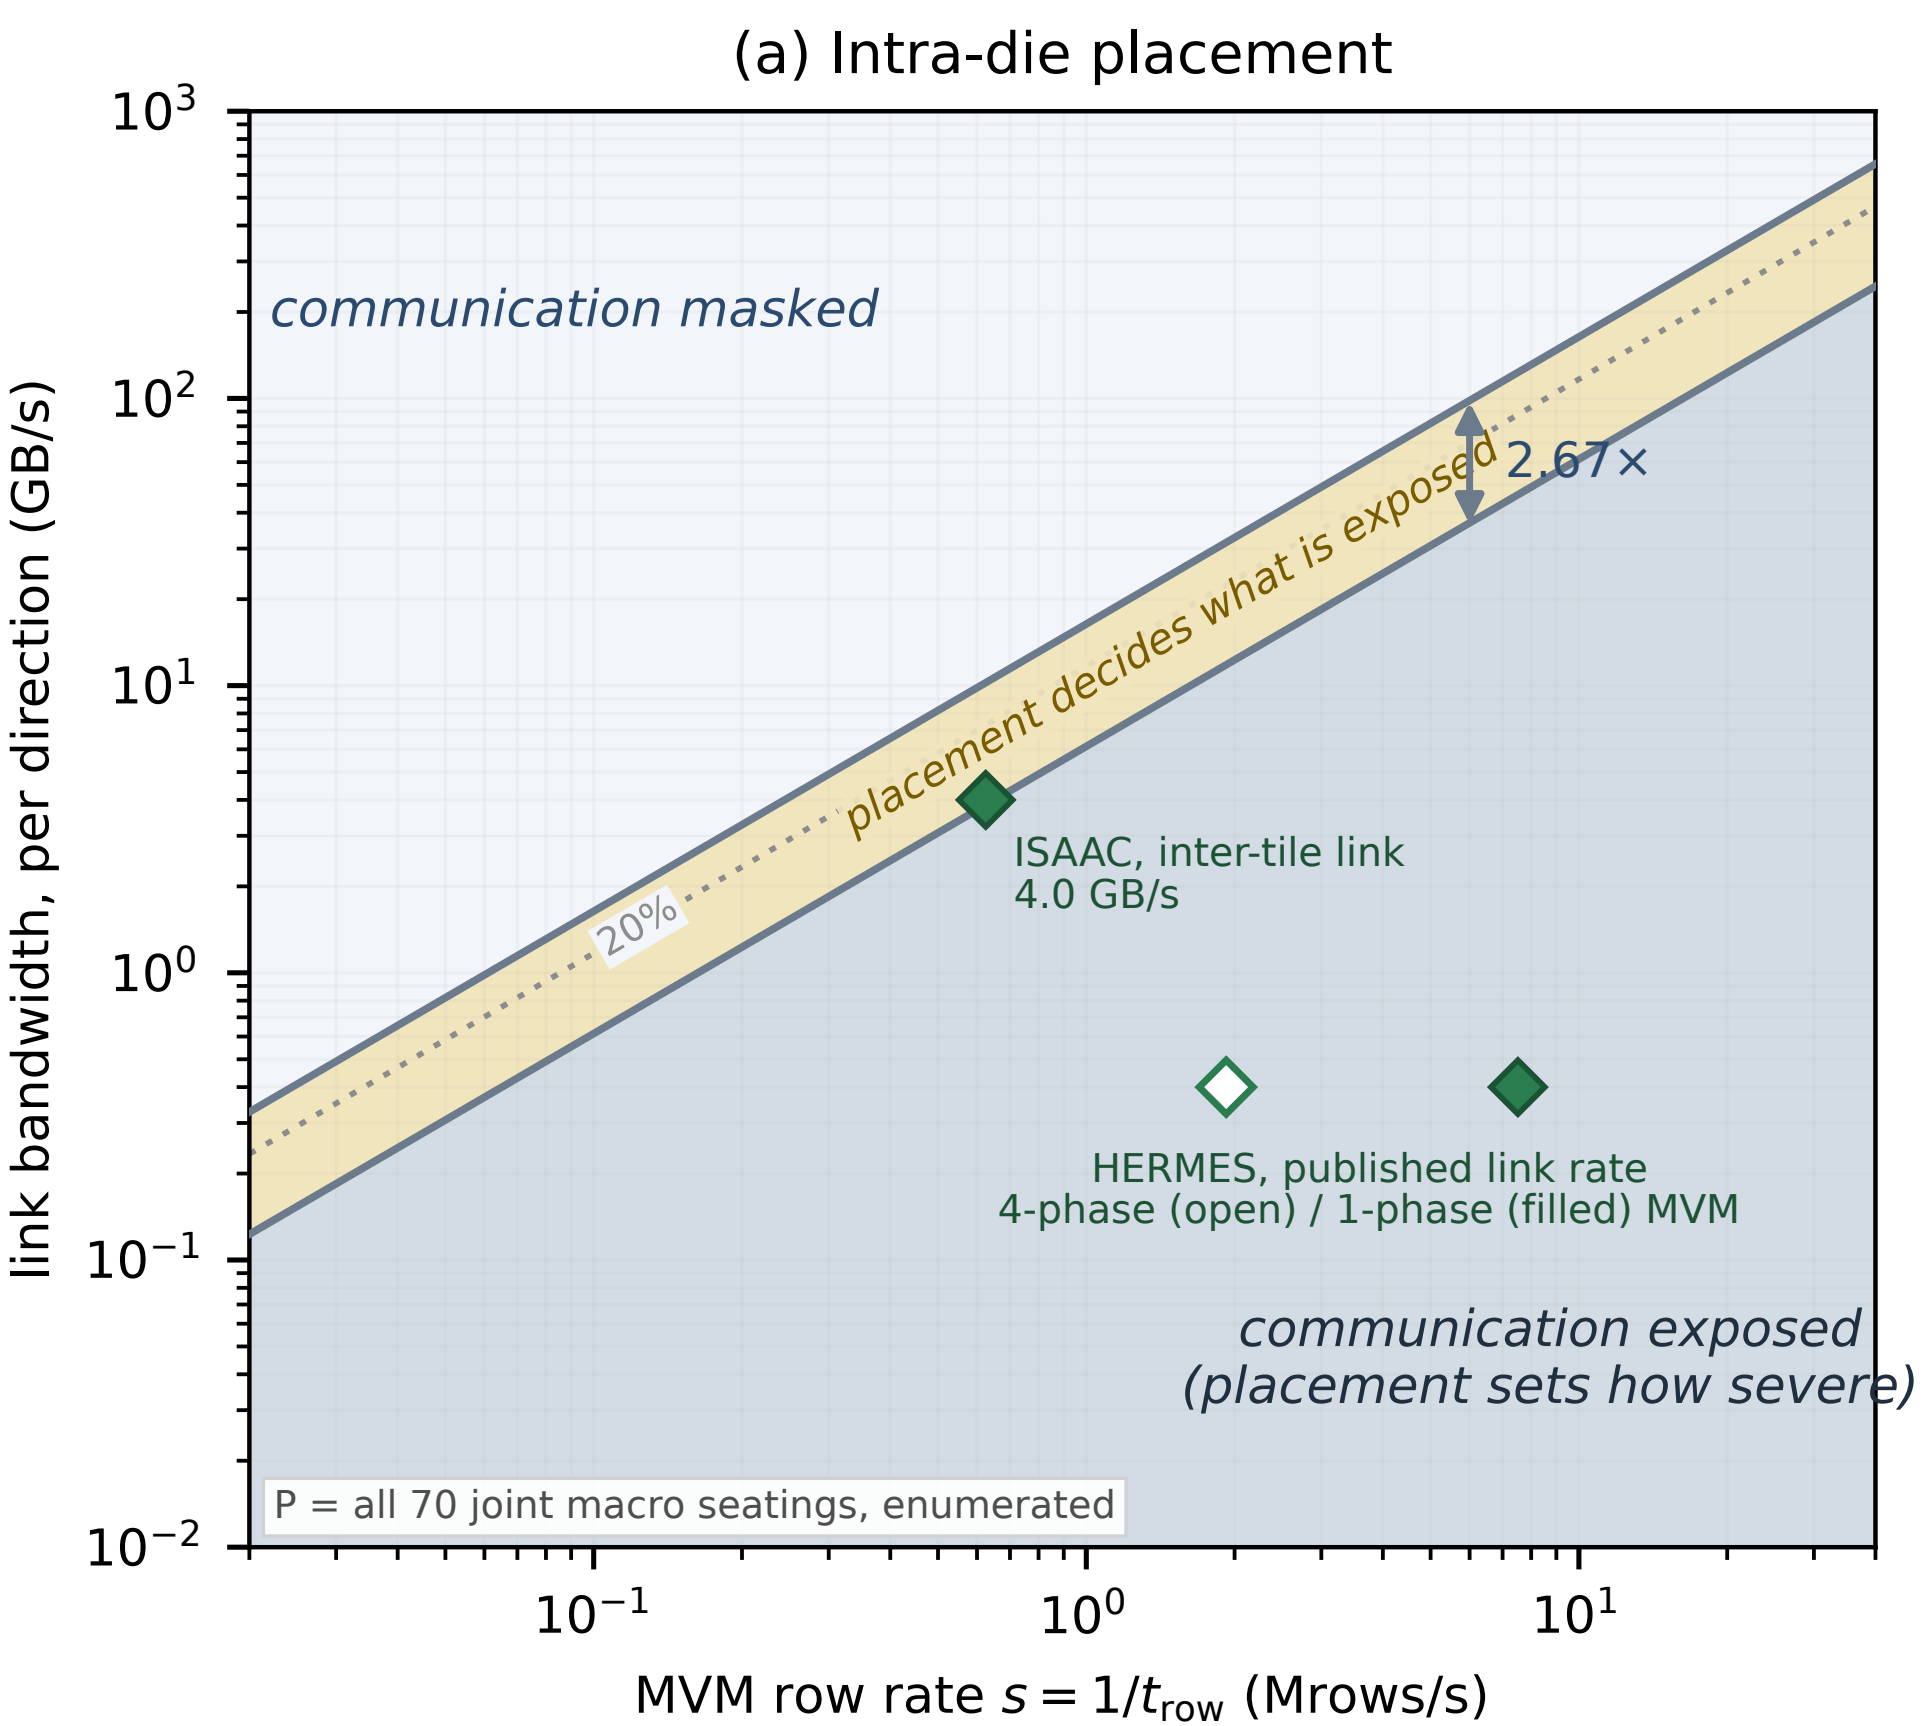
(a) Intra-die placement
communication masked
placement decides what is exposed
2.67×
20%
ISAAC, inter-tile link
4.0 GB/s
HERMES, published link rate
4-phase (open) / 1-phase (filled) MVM
communication exposed
(placement sets how severe)
P = all 70 joint macro seatings, enumerated
link bandwidth, per direction (GB/s)
MVM row rate $s = 1/t_{\text{row}}$ (Mrows/s)
10^{3}
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-1}
10^{0}
10^{1}