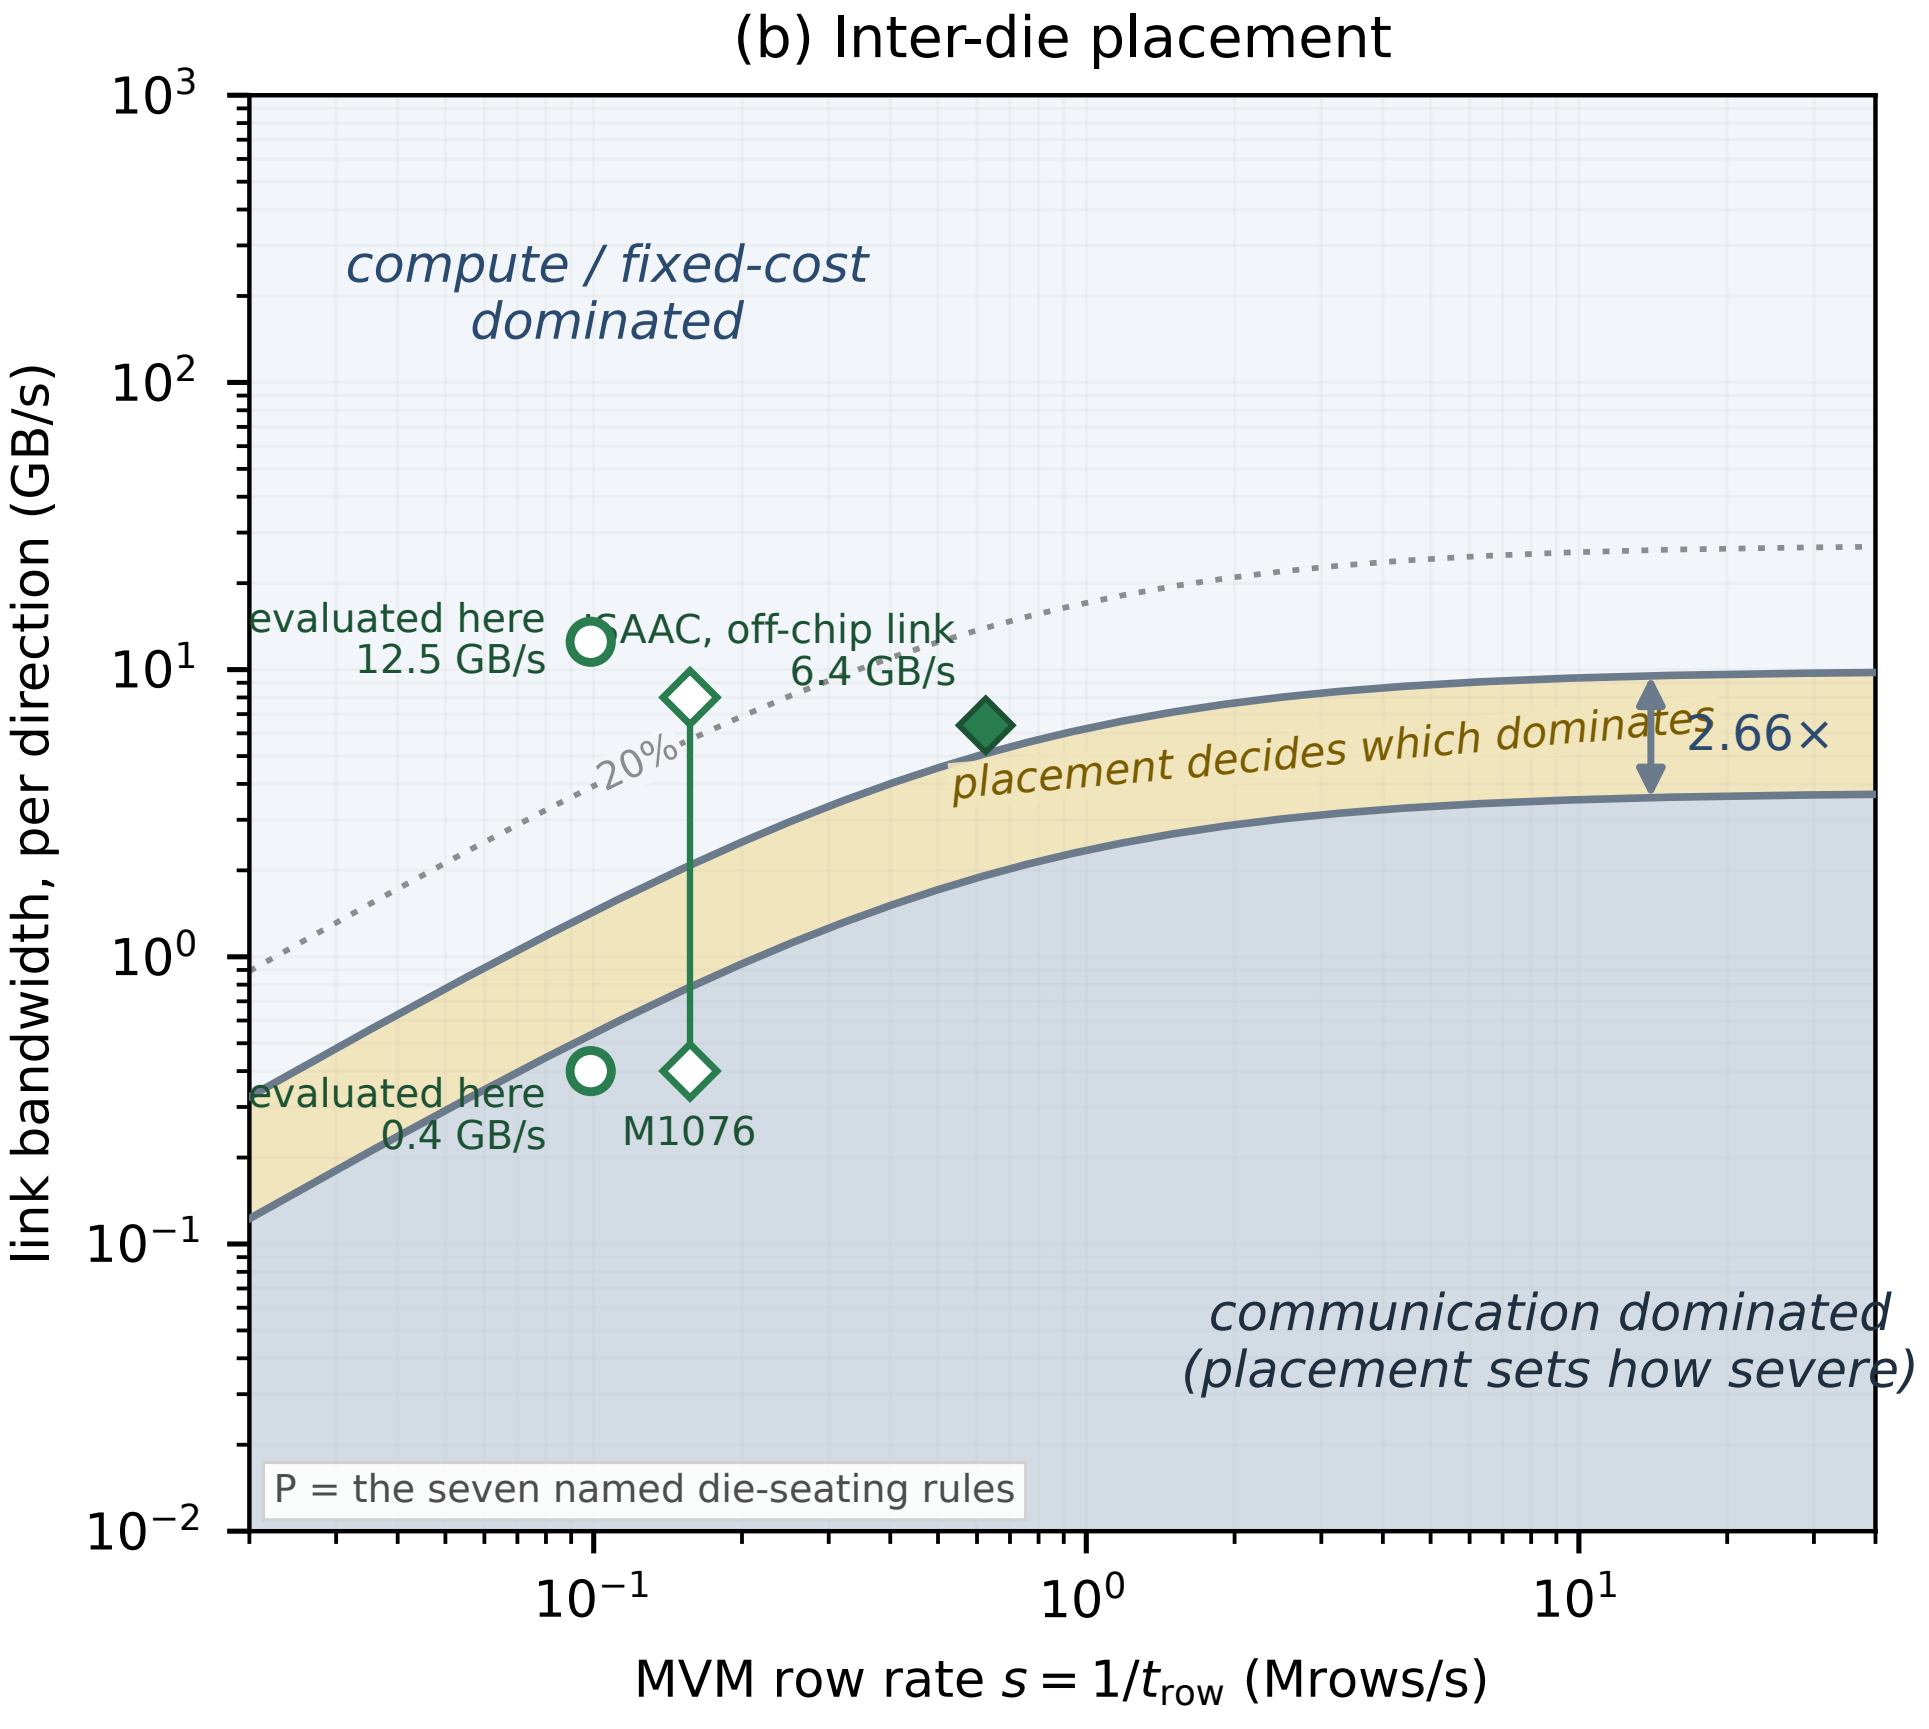
(b) Inter-die placement
compute / fixed-cost dominated
evaluated here
12.5 GB/s
ISAAC, off-chip link
6.4 GB/s
20%
placement decides which dominates
2.66×
evaluated here
0.4 GB/s
M1076
communication dominated
(placement sets how severe)
P = the seven named die-seating rules
link bandwidth, per direction (GB/s)
MVM row rate $s = 1/t_{row}$ (Mrows/s)
$10^3$
$10^2$
$10^1$
$10^0$
$10^{-1}$
$10^{-2}$
$10^{-1}$
$10^0$
$10^1$