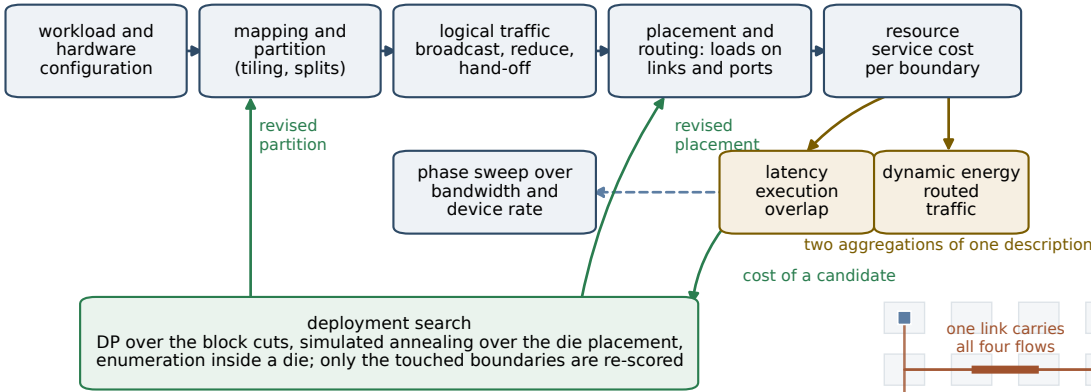
workload and hardware configuration
mapping and partition (tiling, splits)
logical traffic broadcast, reduce, hand-off
placement and routing: loads on links and ports
resource service cost per boundary
revised partition
revised placement
phase sweep over bandwidth and device rate
latency execution overlap
dynamic energy routed traffic
two aggregations of one description
cost of a candidate
deployment search
DP over the block cuts, simulated annealing over the die placement, enumeration inside a die; only the touched boundaries are re-scored
the search optimises latency; energy is reported beside it
one link carries all four flows
two producer dies to two consumer dies: the logical traffic is fixed, the routed cost is not