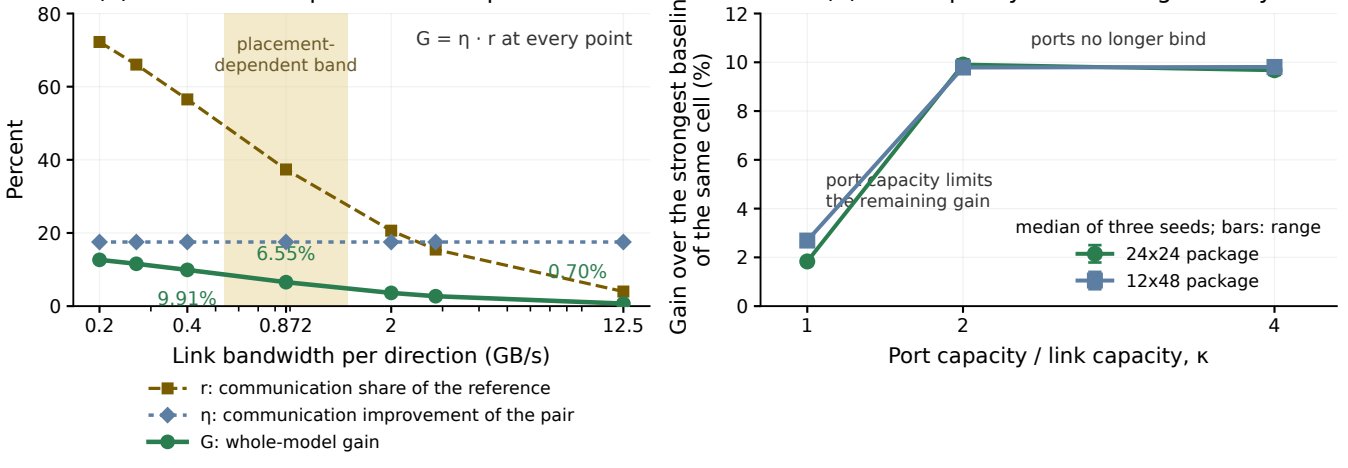
(a) Bandwidth response of fixed placements
placement-
dependent band
G = η · r at every point
Percent
80
60
40
20
0
0.2
0.4
0.872
2
12.5
6.55%
0.70%
9.91%
Link bandwidth per direction (GB/s)
r: communication share of the reference
η: communication improvement of the pair
G: whole-model gain
(b) Port capacity and mesh geometry
ports no longer bind
port capacity limits
the remaining gain
median of three seeds; bars: range
24x24 package
12x48 package
Gain over the strongest baseline
of the same cell (%)
12
10
8
6
4
2
0
1
2
4
Port capacity / link capacity, κ