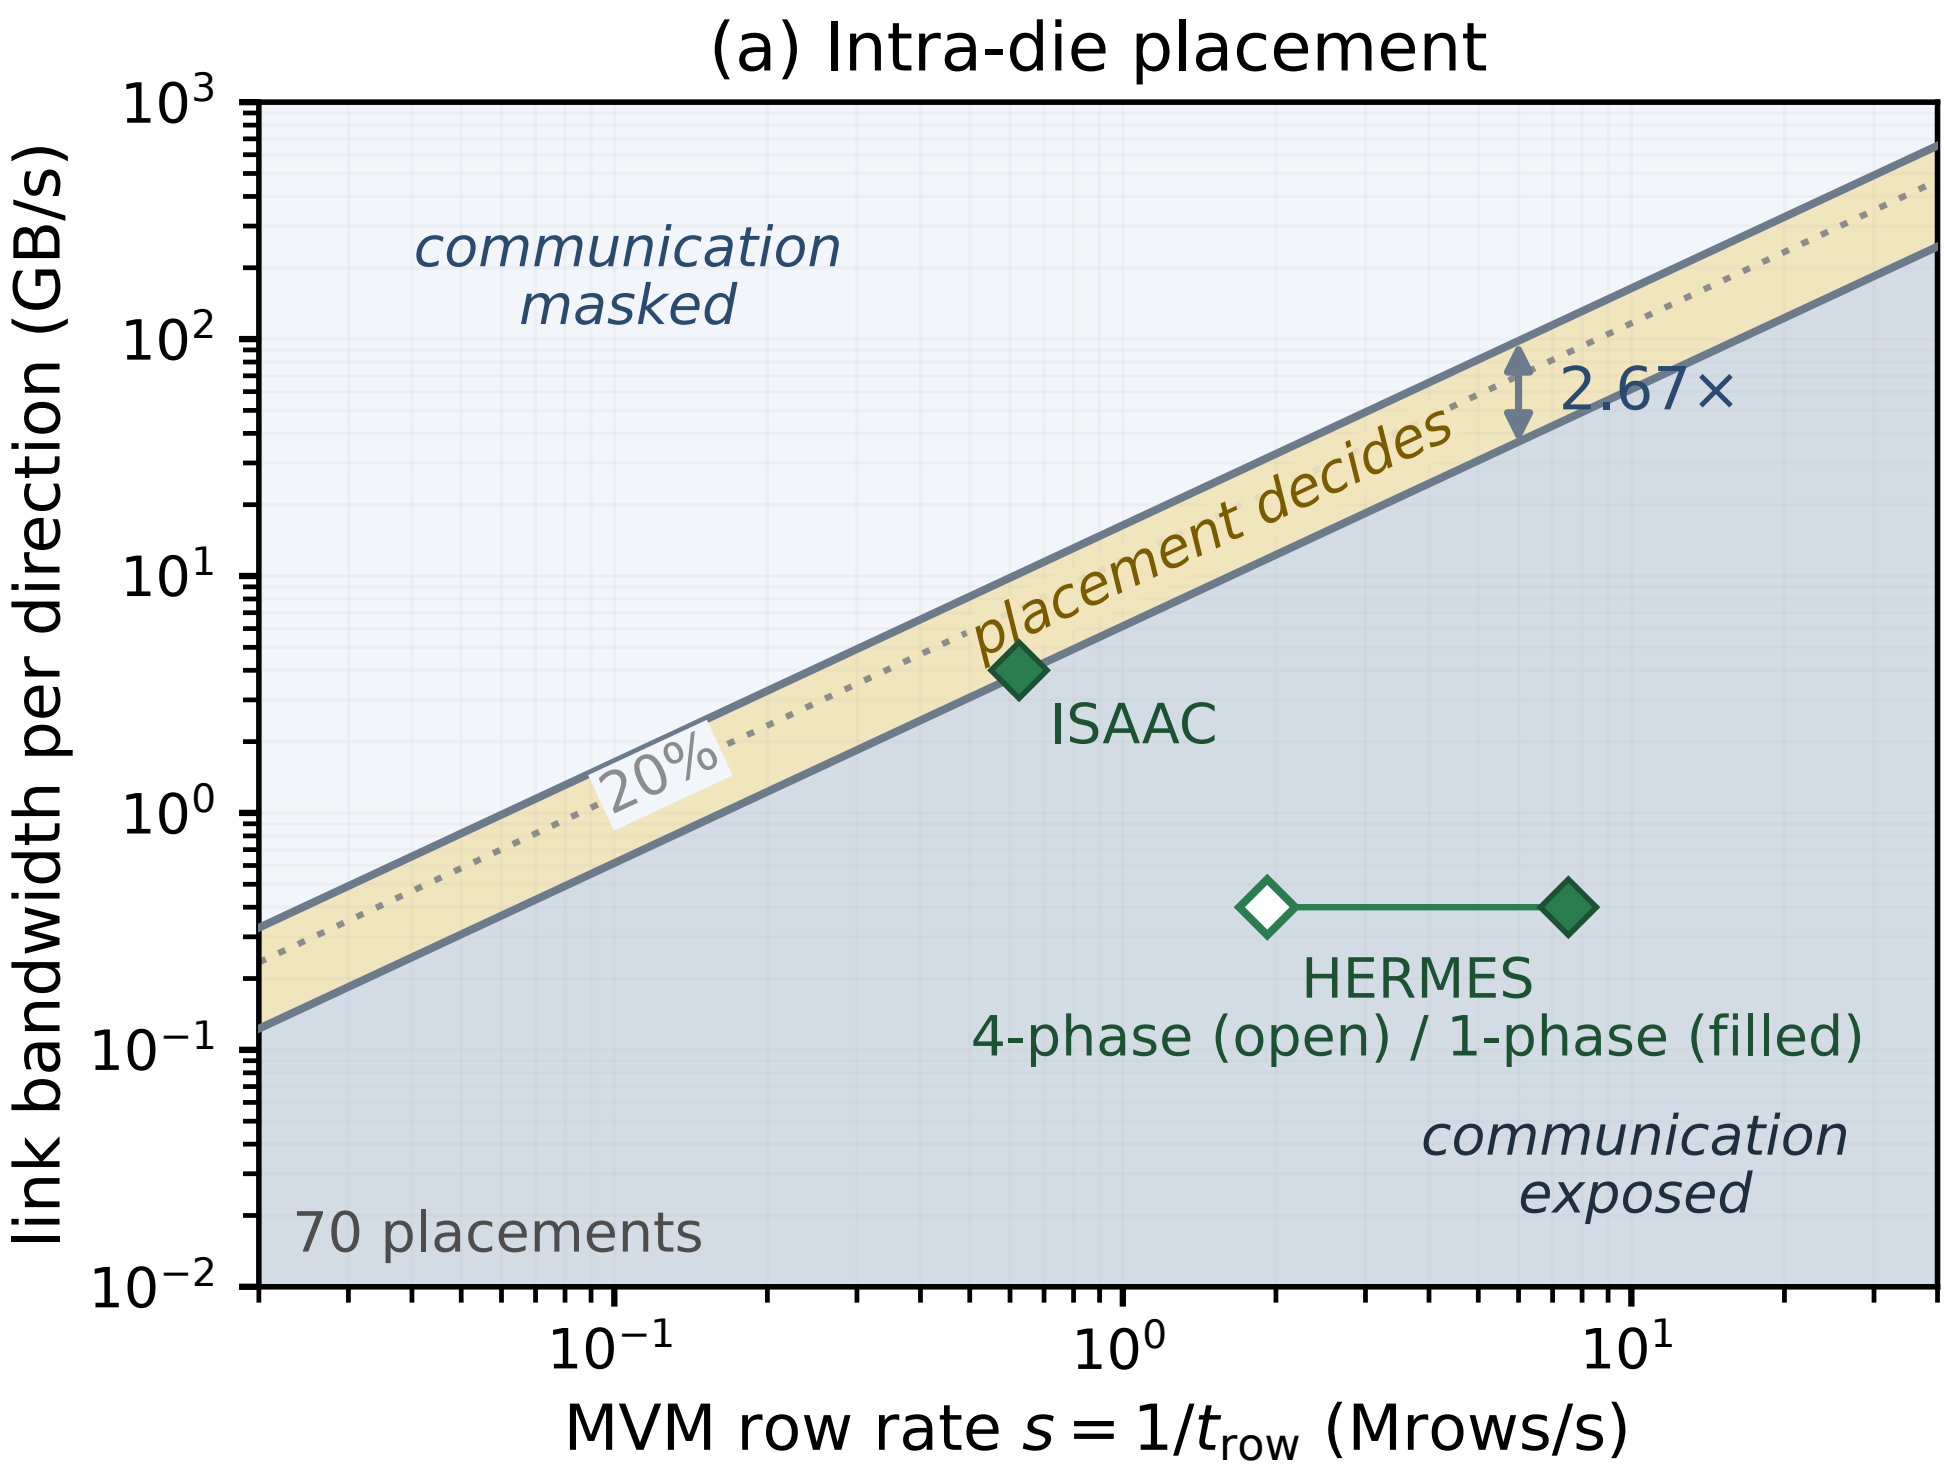
(a) Intra-die placement
link bandwidth per direction (GB/s)
MVM row rate $s = 1/t_{\text{row}}$ (Mrows/s)
10^{3}
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-1}
10^{0}
10^{1}
communication masked
placement decides
2.67×
20%
ISAAC
HERMES
4-phase (open) / 1-phase (filled)
communication exposed
70 placements