


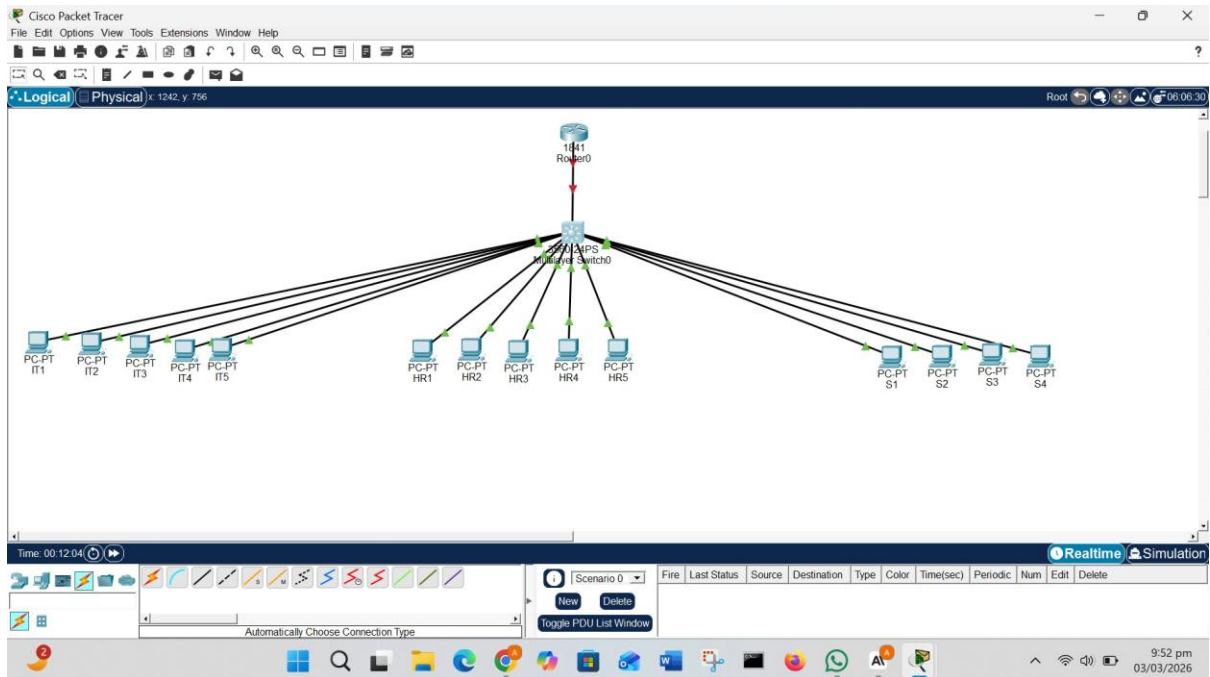

Multilayer Switch0

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface FastEthernet0/10, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/10, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/11, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/11, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/12, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/12, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/13, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/13, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/14, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/14, changed state to up
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]: no




Press RETURN to get started!

Switch>enable
Switch#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name IT
Switch(config-vlan)#vlan 20
Switch(config-vlan)#name HR
Switch(config-vlan)#vlan 30
Switch(config-vlan)#name Web-Servers
Switch(config-vlan)#exit
Switch(config)#
```

Copy Paste

Top

The zoomed-in view shows the same CLI output as the main window, but with a yellow box highlighting the configuration commands from 'Switch>enable' to 'Switch(config)#'. The background shows a partial view of the network diagram with PCs S1, S2, S3, and S4.

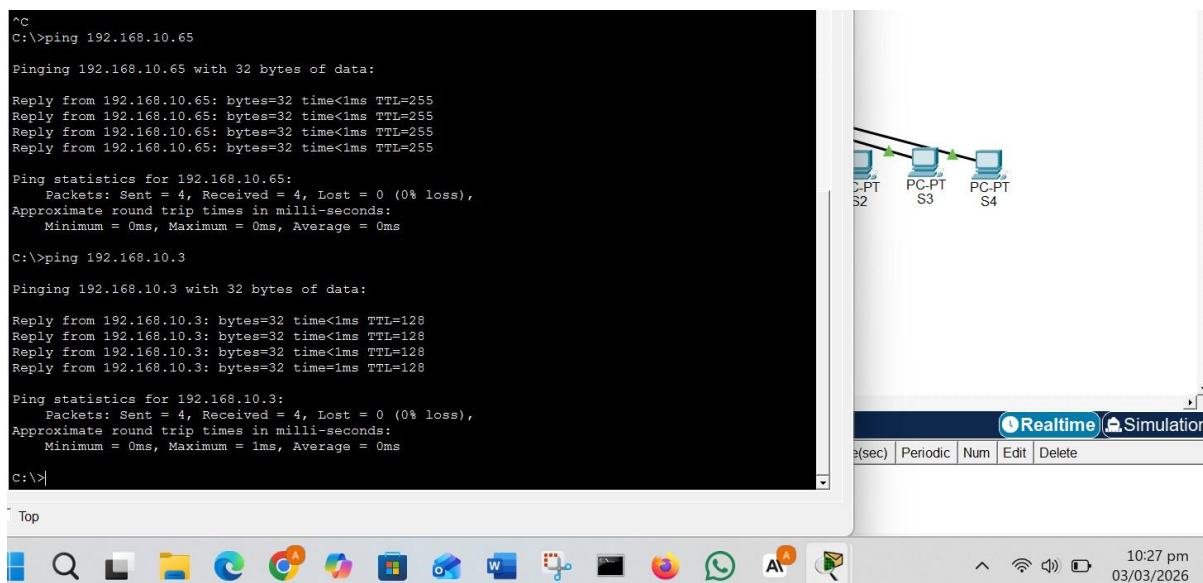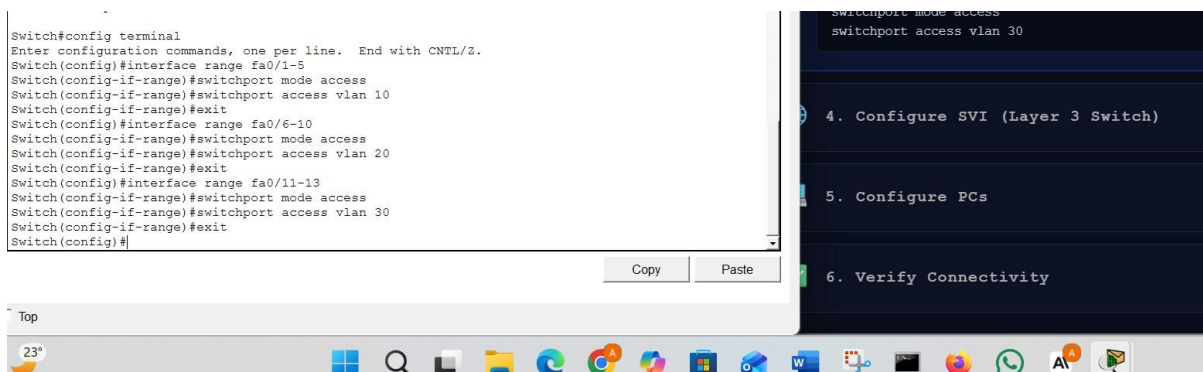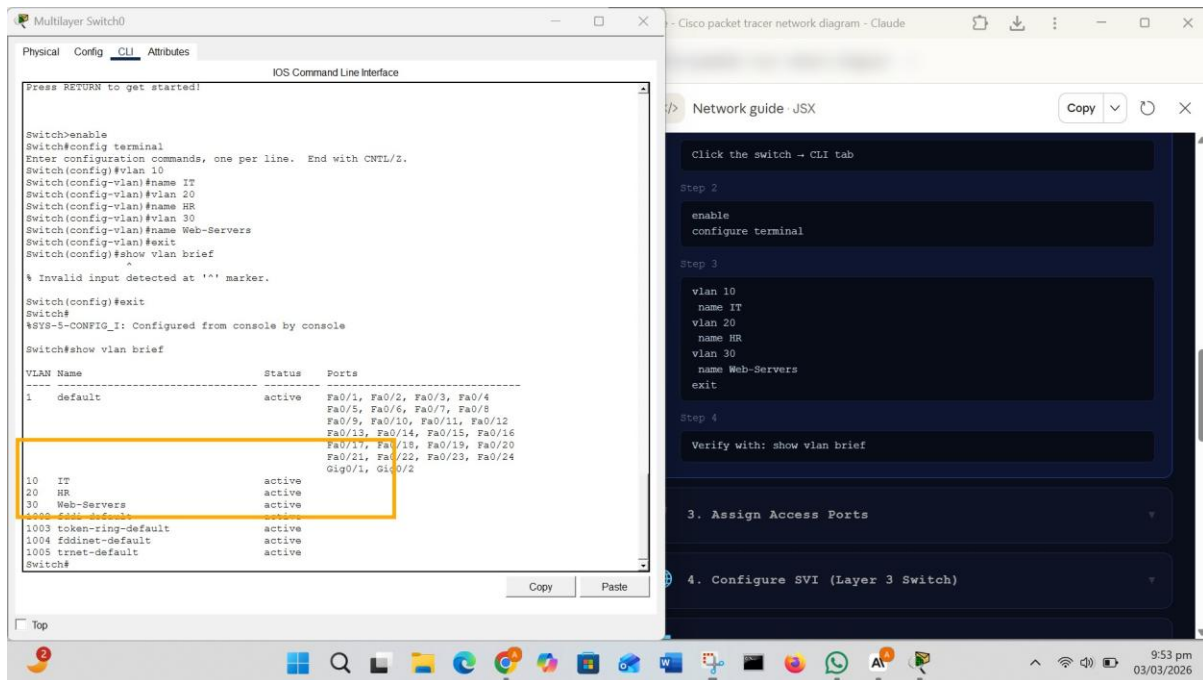

```
Switch#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

Gateway of last resort is not set

```
192.168.10.0/24 is variably subnetted, 3 subnets, 2 masks
C       192.168.10.0/27 is directly connected, Vlan10
C       192.168.10.32/27 is directly connected, Vlan20
C       192.168.10.64/28 is directly connected, Vlan30
```

Switch#

Switch#

Switch#show vlan brief

VLAN Name	Status	Ports
1 default	active	Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/1 Gig0/2
10 IT	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5
20 HR	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10

Copy

Paste

Top

