
RF PLASMA GENERATORS

BRINGING OUR RELIABLE POWER DELIVERY FROM MEDICAL TO SEMI



ANALOGIC DESIGNS, DEVELOPS, AND MANUFACTURES WORLD-CLASS **RF POWER AMPLIFIERS** FOR VARIOUS CONFIGURATIONS AND BRINGS HIGH PRECISION PULSING TO SEMICONDUCTOR MANUFACTURING.

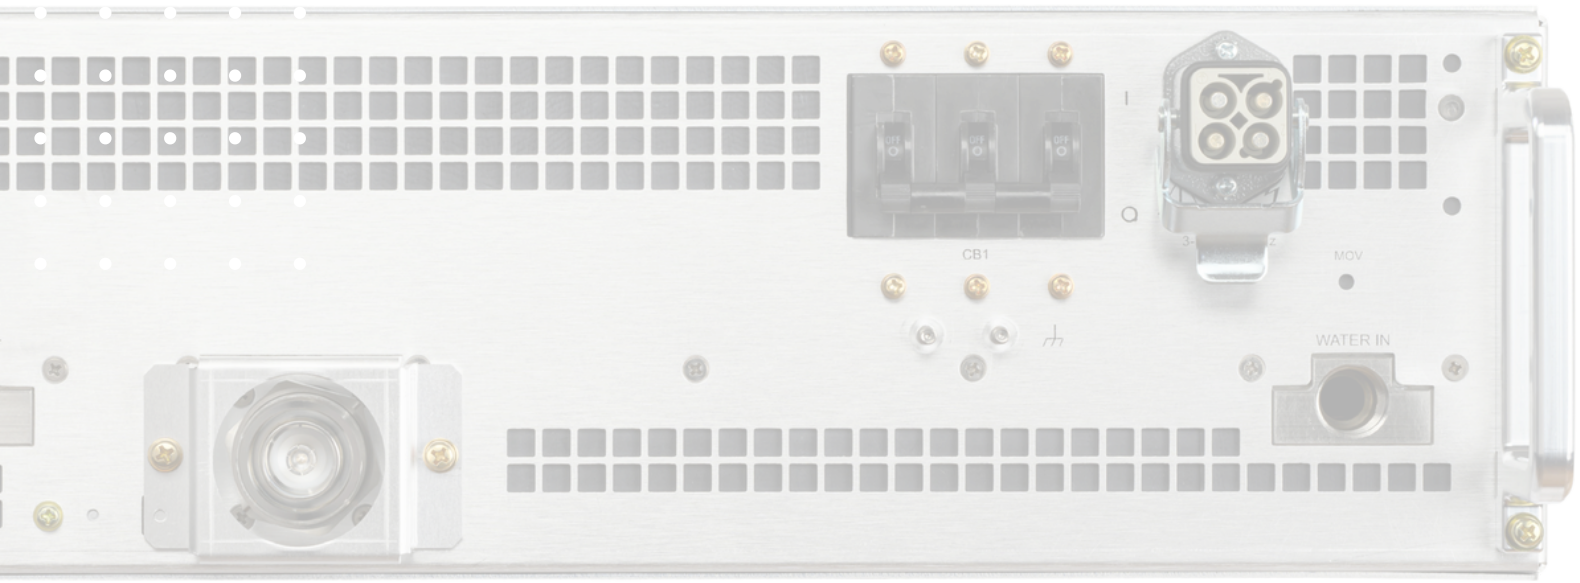

AVA1213


1.25KW
13.56MHZ

WITH THE AVA1213, ANALOGIC ENTERED THE SEMICONDUCTOR RF PLASMA MARKET, DELIVERING AN ADVANCED AMPLIFIER FEATURING PATENT-PENDING MULTI-PULSING CAPABILITIES, SUB-MILLISECOND FREQUENCY TUNING (WITHIN PULSING), SUPPORT FOR CEX AND HIGH ACCURACY AT LOW OUTPUT.

THE RF GENERATOR ALSO OFFERS FORWARD AND LOAD POWER REGULATION AS WELL AS EXTERNAL VOLTAGE REGULATION, ENSURING PRECISE PROCESS CONTROL.

AVAILABLE IN BOTH STANDARD AND ADVANCED CONFIGURATIONS, THE AVA1213 REFLECTS ANALOGIC'S COMMITMENT TO INNOVATION, APPLYING CUTTING-EDGE INNOVATION AND EXPERTISE TO THE EVOLVING FIELD OF SEMICONDUCTOR POWER DELIVERY.

FRONT

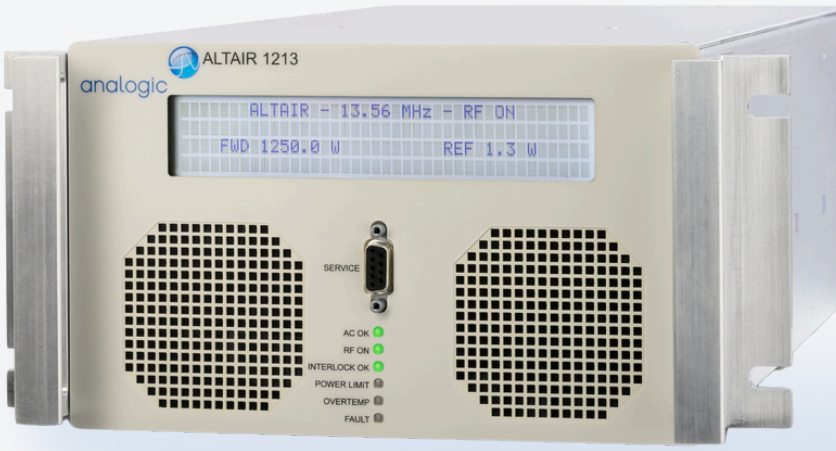


BACK



Model	AVA 1213
Center Frequency	13.56 MHz
Tuning Range	± 5%
Load Impedance	50 Ohm
Max Forward Power	1250 Watt
Max Reflected Power	300W
Power Accuracy	± 2% of setpoint, or ± 3W (whichever is greater)
Pulsing	Multilevel (digital or analog)
Pulse Synchronization	Pulse-in SMA(F), Pulse-out SMA(F)
Minimum Pulse Width	50 msec
Pulse PRF	100 Hz – 20 kHz
Pulse Duty Cycle	1% - 99%
Pulse Rise Time	< 4 µsec
Pulse Fall Time	< 0.2 µsec
Interface	RS232, 25 pin Analog
Interface Options	Ethernet, EtherCAT, Profibus and DeviceNet
Weight	<11.5 Kg (<25.4 lbs)
Dimensions	215.6 mm (W) X 441.7 mm (L) X 133.4 mm (H)
Output Connector	N(F)
AC Line	187–228 VAC 1-φ, 50/60 Hz, 12A at 228VAC –IEC 320 Connector

THE **AVA1213** IS AVAILABLE IN TWO CONFIGURATIONS, STANDARD OR ADVANCED.

ANALOGIC IS DEDICATED TO CONTINUAL INNOVATION, BRINGING THE LATEST IN RESEARCH AND EXPERIENCE TO THE WORLD OF POWER AMPLIFIER DESIGN.

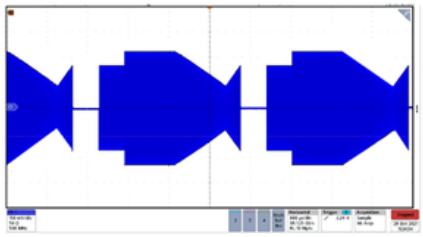

EXAMPLE ARBITRARY WAVEFORM


AVA 3013 3KW 13.56MHZ

WITH THE AVA3013, ANALOGIC STRENGTHENED ITS POSITION IN THE SEMICONDUCTOR RF PLASMA MARKET, OFFERING A STATE OF THE ART RF GENERATOR AT BEST IN CLASS VALUE.

IT DELIVERS THE FLEXIBILITY AND PRECISION DEMANDED BY ADVANCED SEMICONDUCTOR PLASMA APPLICATIONS.



FRONT

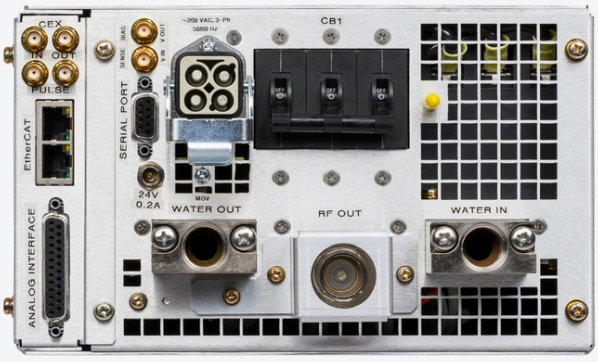


BACK

Model	AVA 3013
Center Frequency	13.56 MHz
Tuning Range	± 5%
Load Impedance	50 Ohm
Max Forward Power	3000 Watt
Max Reflected Power	750W
Power Accuracy	± 2% of setpoint, or ± 3W (whichever is greater)
Pulsing	Multilevel (digital or analog)
Pulse Synchronization	Pulse-in SMA(F), Pulse-out SMA(F)
Minimum Pulse Width	50 msec
Pulse PRF	100 Hz – 10 kHz
Pulse Duty Cycle	1% - 99%
Pulse Rise Time	< 4 µsec
Pulse Fall Time	< 0.2 µsec
Interface	RS232, 25 pin Analog
Interface Options	Ethernet, EtherCAT, Profibus and DeviceNet
Weight	<20 Kg (<44 lbs)
Dimensions	215.6 mm (W) X 402.6 mm (L) X 133.4 mm (H)
Output Connector	HN(F)
AC Line	187–228 VAC 3-φ, 50/60 Hz, 20A at 187VAC

THE **AVA3013** IS AVAILABLE IN TWO CONFIGURATIONS, STANDARD OR ADVANCED.

ANALOGIC IS DEDICATED TO CONTINUAL INNOVATION,

BRINGING THE LATEST IN RESEARCH AND EXPERIENCE TO THE WORLD OF POWER AMPLIFIER DESIGN.

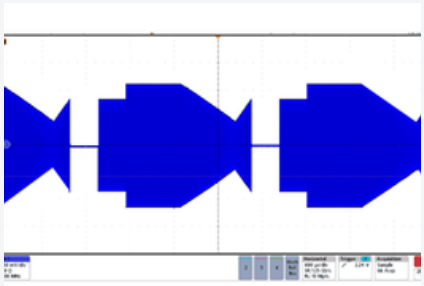

EXAMPLE ARBITRARY WAVEFORM

AVA 6013 6KW 13.56MHZ



WITH THE **AVA 6013**, ANALOGIC WILL CEMENT IT'S POSITION IN THE SEMICONDUCTOR INDUSTRY BY INTRODUCING AN AMPLIFIER THAT DELIVERS PATENT-PENDING MULTI-PULSING FUNCTIONALITY, SUB-MILLISECOND FREQUENCY AGILITY (WITHIN PULSE), AND FULL SUPPORT FOR CEX AND HALO MODES AT HIGHER POWER.

THE MODULAR DESIGN PROVIDES ADVANCED CONTROL AND RELIABILITY FOR THE DEMANDING PROCESSES OF NEXT GENERATION SEMICONDUCTOR PROCESSES.




Model	AVA 6013
Center Frequency	13.56 MHz
Tuning Range	± 10%
Load Impedance	50 Ohm
Max Forward Power	6000 Watt
Max Reflected Power	1500W
Power Accuracy	± 2% of setpoint, or ± 3W (whichever is greater)
Pulsing	Multilevel (digital or analog)
Pulse Synchronization	Pulse-in SMA(F), Pulse-out SMA(F)
Minimum Pulse Width	10 msec
Pulse PRF	100 Hz – 10 kHz
Pulse Duty Cycle	1% - 99%
Pulse Rise Time	< 4 µsec
Pulse Fall Time	< 0.2 µsec
Interface	RS232, 25 pin Analog
Interface Options	Ethernet, EtherCAT, Profibus and DeviceNet
Weight	<33.7 Kg (<74.2 lbs)
Dimensions	483 mm (W) X 650 mm (D) X 131 mm (H)
Output Connector	DIN 7/16 (F)
AC Line	380-480 VAC 3-φ, 50/60 Hz, 30A

THE **AVA6013** IS AVAILABLE IN TWO CONFIGURATIONS, STANDARD OR ADVANCED.

ANALOGIC IS DEDICATED TO CONTINUAL INNOVATION,

BRINGING THE LATEST IN RESEARCH AND EXPERIENCE TO THE WORLD OF POWER AMPLIFIER DESIGN.

EXAMPLE ARBITRARY WAVEFORM

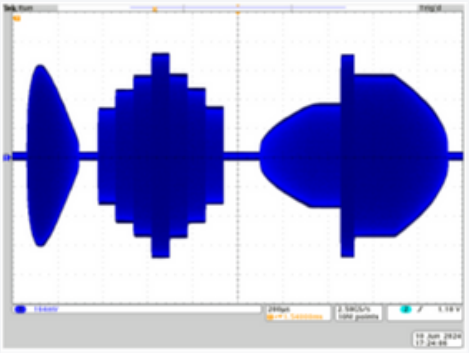



ANALOGIC DESIGNS, DEVELOPS, AND MANUFACTURES WORLD-CLASS **POWER AMPLIFIERS.**

WITH **OVER 40 YEARS** OF DESIGNING AND PERFECTING POWER DELIVERY FOR THE MEDICAL INDUSTRY, WE NOW BRING OUR EXPERTISE TO THE GROWING SEMI MARKET.

ANALOGIC PROVIDES DEPOT REPAIR SERVICES FOR ALL OF OUR POWER AMPLIFIERS FROM OUR GLOBAL FACILITIES.

OUR HIGHLY TRAINED REPAIR TEAM UTILIZES THE SAME HIGH-QUALITY COMPONENTS AND PROCESSES AS OUR PRODUCTION LINE, SO YOU CAN FEEL CONFIDENT IN THE QUALITY OF ANY OF OUR REPAIRS.

REACH OUT TO OUR TEAM AND SEE HOW WE CAN HELP BRING VALUE.

CONTACT US

+1-978-326-4000

www.analogic.com

9 Northeastern Boulevard Salem, NH 03079, USA

