


E2E-normalized interactivity · P90


1 / P90(request E2E seconds / output tokens) · includes TTFT and generation · higher is better

● KV ◆ KV scale 3 / credit 0.8 ✱ KV temperature 0.5
■ RR ▲ KV scale 2 / credit 0.8

Measured hardware

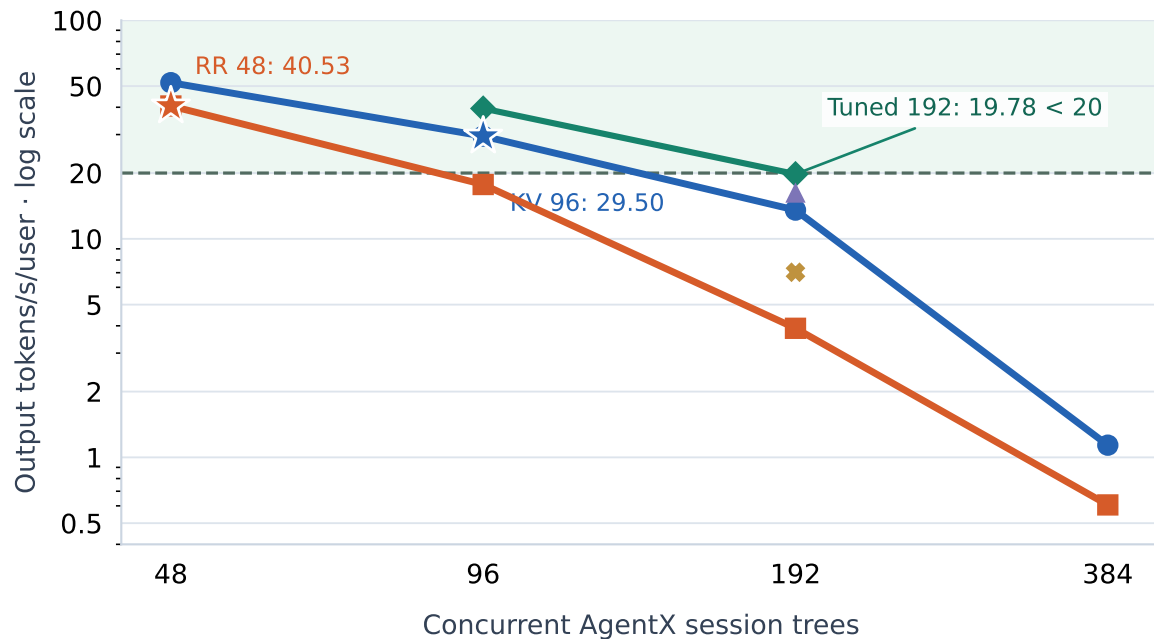

Native V10 · 12 matching hardware settings

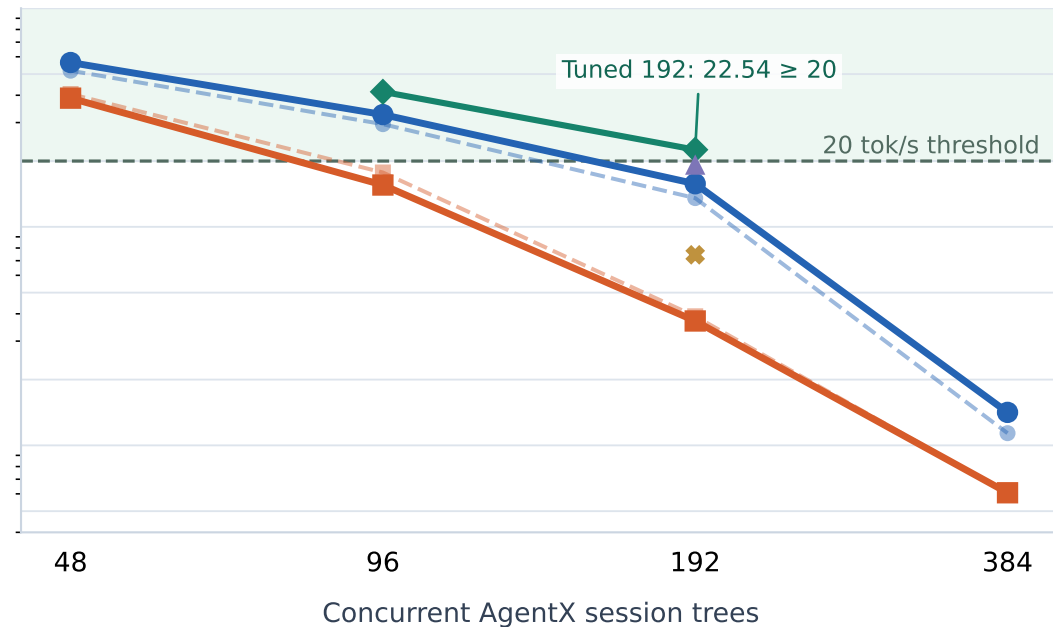

Stars: highest-throughput measured default-policy cells passing BOTH I90 ≥ 20 tok/s and TTFT p95 ≤ 10 s.

Native V10: four original calibration points plus 8 new holdouts; faint dashed curves show default-policy hardware.

Lines connect samples; threshold crossings are not measured. Hardware has one trial per cell, with no uncertainty bands.