



Agg · hardware versus Native DynoSim V10 · default KV and RR


Total tokens/s/GPU

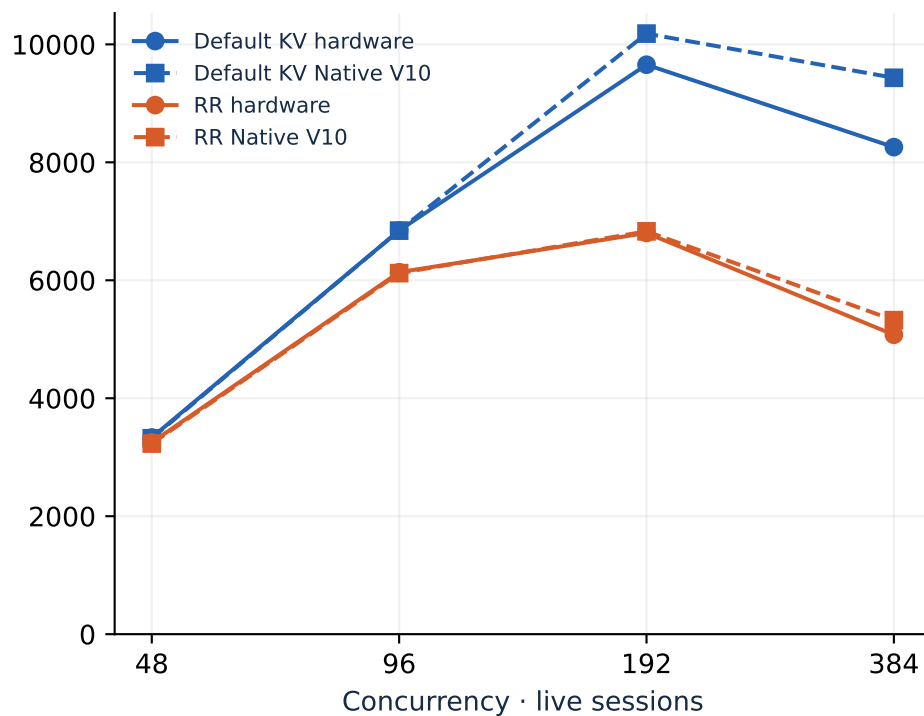

TTFT p95 (seconds; log)

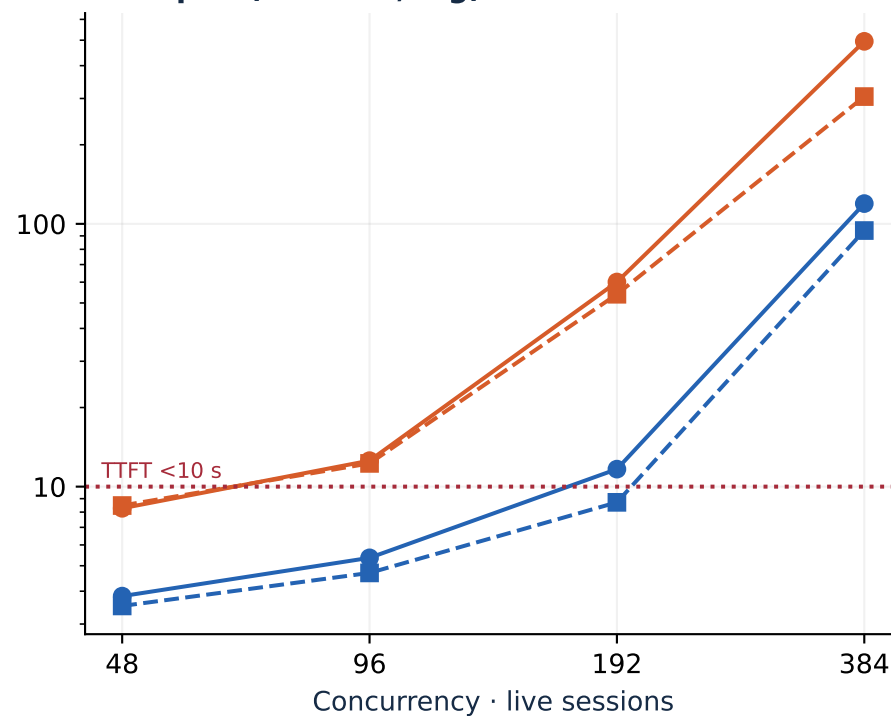

E2E I90 (output tok/s/user; log)

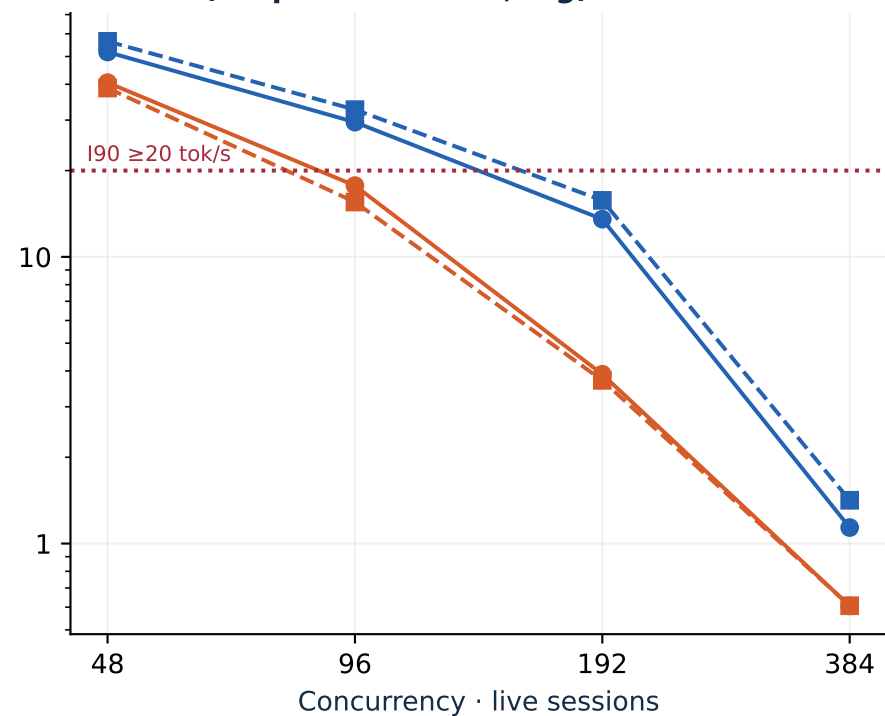

C192/C384 were calibration points; C48/C96 are holdouts. The table includes all 12 pairs, including tuned settings.
Throughput agreement does not guarantee correct latency tails or SLO classifications.