



Categories

A-Z

System Core

Analog


Timers

Connectivity

Computing

Middleware and Software Packs

Pinout view System view

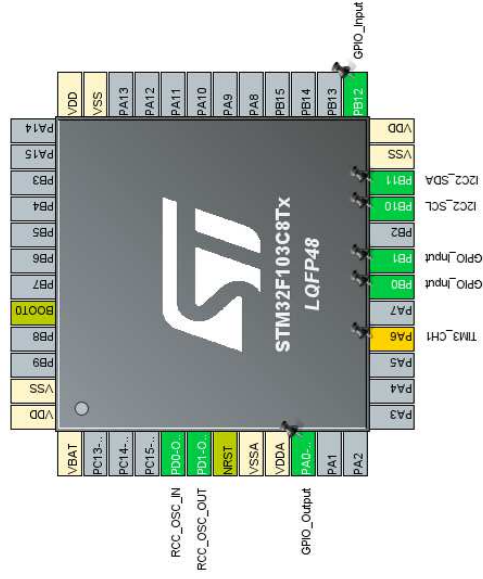

Assignment2.ioc - Pinout & Configuration

Home > STM32F103C8Tx

GENERATE CODE

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Categories A-Z

System Core

DMA
GPIO
IWDG
NVIC
RCC
SYS
WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software Packs

NVIC Mode and Configuration

Configuration

NVIC Code generation

Priority Group 4 bit... Sort by Preemption Priority and Sub Priority Sort by interrupts ne


Search available interrupts Show Force DMA channel

NVIC Interrupt Table			Enabled	Preemption Priority
Non maskable interrupt			☒	0
Hard fault interrupt			☒	0
Memory management fault			☒	0
Prefetch fault, memory access fault			☒	0
Undefined instruction or illegal state			☒	0
System service call via SWI instruction			☒	0
Debug monitor			☒	0
Pendable request for system service			☒	0
Time base: System tick timer			☒	15
PVD interrupt through EXTI line 16			☐	0
Flash global interrupt			☐	0
RCC global interrupt			☐	0
TIM3 global interrupt			☒	0
I2C2 event interrupt			☐	0
I2C2 error interrupt			☐	0

☐ Enabled ☐ Preemption Priority ☐ Sub Priority

Pinout view

System view

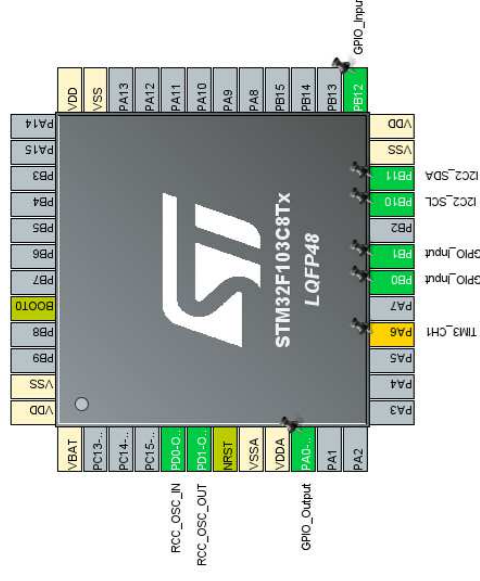

A-Z

Mode

System Core >	
DMA	>
GPIO	>
IWDG	>
NVIC	>
RCC	>
SYS	>
WWDG	>
Analog >	
Timers >	
RTC	>
TIM1	>
TIM2	>
TIM3	>
TIM4	>
Connectivity >	
Computing >	
Middleware and Software Packs >	

Reset Configuration


Parameter Settings
User Constants
NVIC Settings
DMA Settings

Configure the below parameters :

Search (Ctrl+F)

- ✓ Counter Settings
 - Prescaler (PSC - 16 bits value) 7199 Up
 - Counter Mode Counter Period (AutoReload Register - .4999 No Division Disable
 - Internal Clock Division (CKD) auto-reload preload
- ✓ Trigger Output (TRGO) Parameters
 - Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

The diagram shows the pinout of the STM32F103C8Tx LQFP48 microcontroller. The pins are arranged in four rows of twelve. The top row contains VDD, VSS, PA13, PA12, PA11, PA10, PA9, PA8, PA7, PA6, PA5, and PA4. The second row contains VDD, VSS, PB3, PB4, PB5, PB6, PB7, PB8, PB9, PB10, PB11, and PB12. The third row contains VDD, VSS, PC13, PC14, PC15, PD0, PD1, PD2, PD3, PD4, PD5, and PD6. The fourth row contains VBAT, PC13, PC14, PC15, PD0, PD1, PD2, PD3, PD4, PD5, PD6, and PD7. Various functions are labeled next to specific pins, such as RCC_OSC_IN, RCC_OSC_OUT, GPIO_Output, and GPIO_Input.

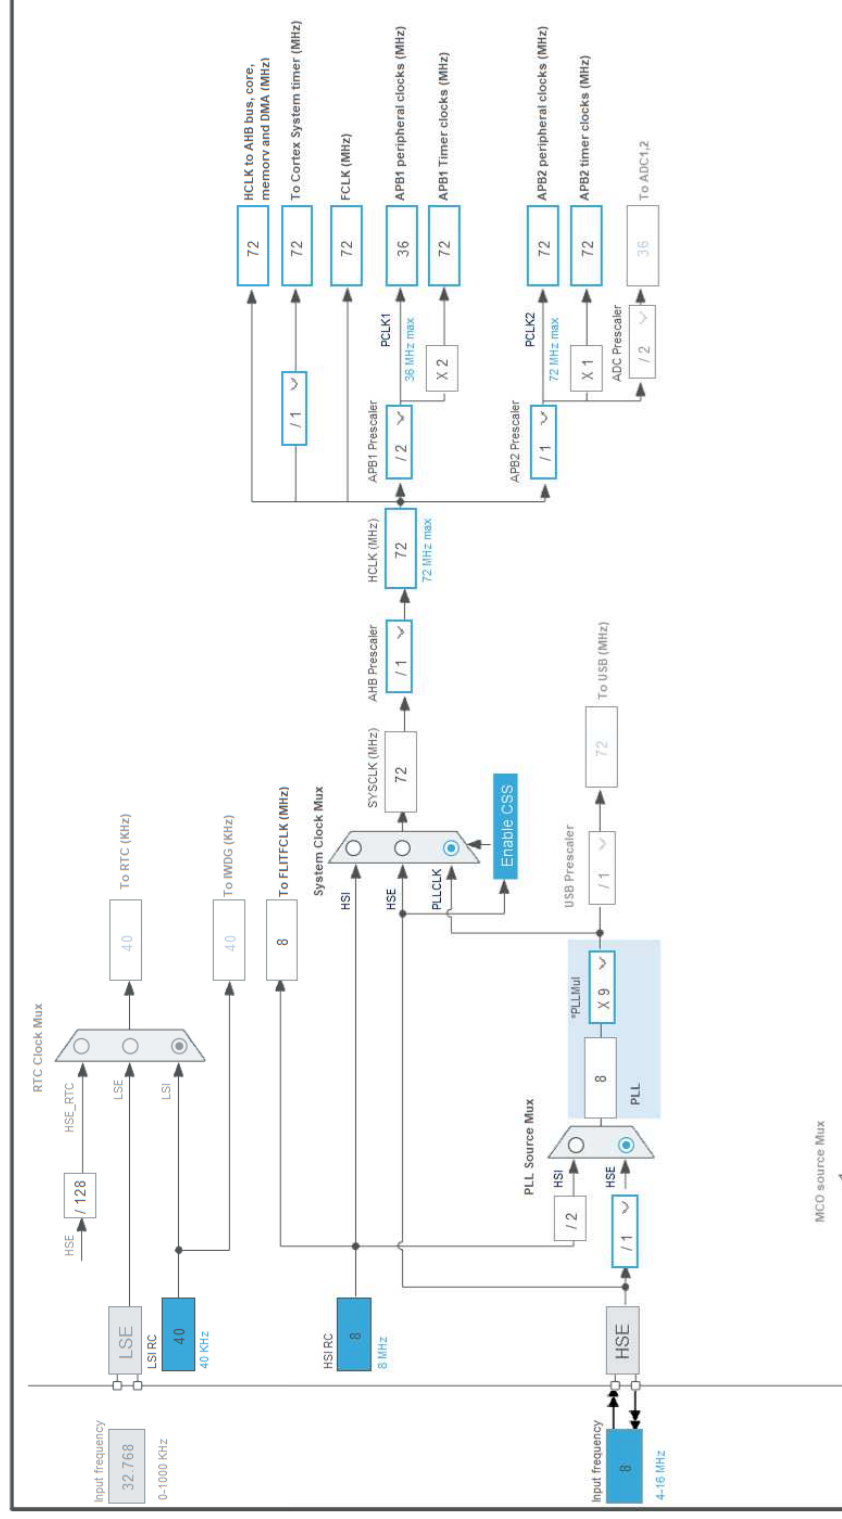

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Project

Project Settings

Project Name

Assignment2

Project Location

C:\Users\DELL\Desktop

Browse

Application Structure

Advanced

v

☐ Do not generate the main()

Toolchain Folder Location

C:\Users\DELL\Desktop\Assignment2\Assignment2

Toolchain / IDE

EWARM

v

Min Version

v

V8.32

☐ Generate Under Root

Code Generator

Linker Settings

Minimum Heap Size

0x200

Minimum Stack Size

0x400

Advanced Settings

Thread-safe Settings

Cortex-M3NS

☐ Enable multi-threaded support

Thread-safe Locking Strategy

Default - Mapping suitable strategy depending on RTOS selection.

v

Mcu and Firmware Package

Mcu Reference

STM32F103C8Tx

Firmware Package Name and Version

STM32Cube FW_F1_V1 8.5

☒ Use latest available version☒ Use Default Firmware Location

Firmware Relative Path

C:\Users\DELL\STM32CubeRepository\STM32Cube_FW_F1_V1 8.5

Browse