
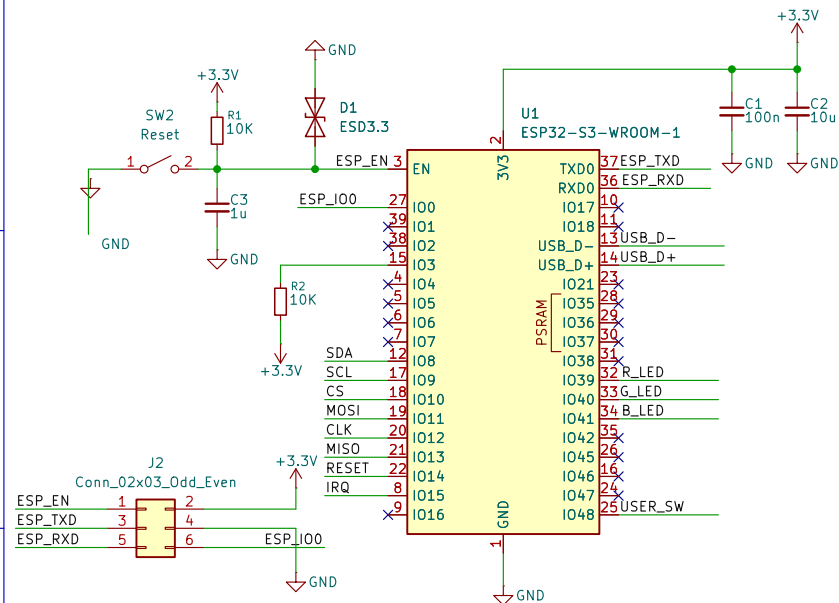
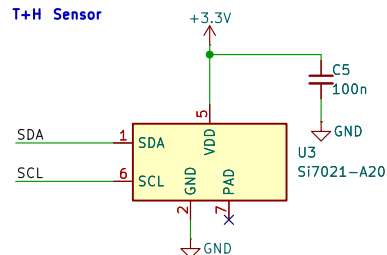

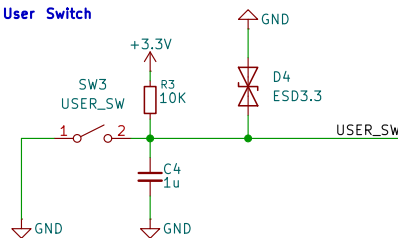


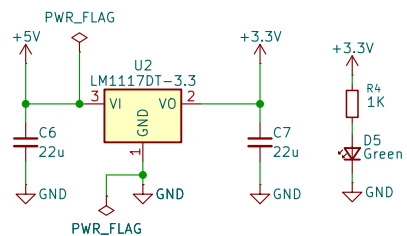
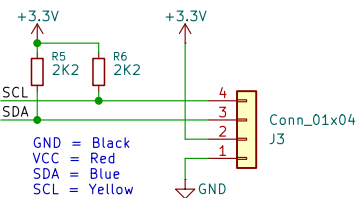


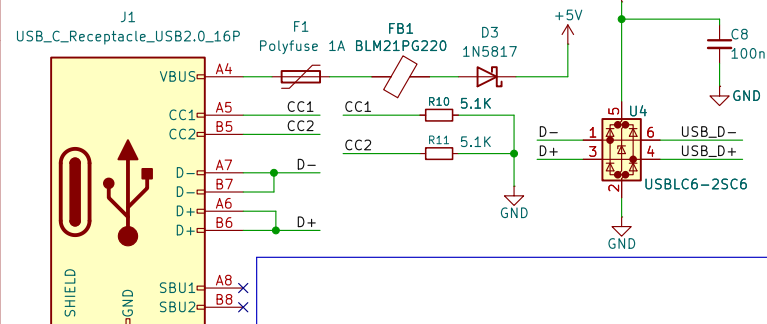

*In module variants that have embedded OSPI PSRAM, i.e. that embed ESP32-S3R8, pins IO136 and IO37 are connected to OSPI PSRAM and are not available for other uses.

GP100,GP1045,GP1046 are connected to the chip's internal weak pull-up/pull-down during the chip reset.

GP103 is floating by default

Sheet: /
File: ESP32-S3.kicad_sch

Size: A4	Date: 2026-06-21
KiCad E.D.A. 10.0.2	

Rev: 1.0
Id: 1/1