


# drylin® E | Multi-axis linear robots | Product range

Room linear robot – for three dimensional applications

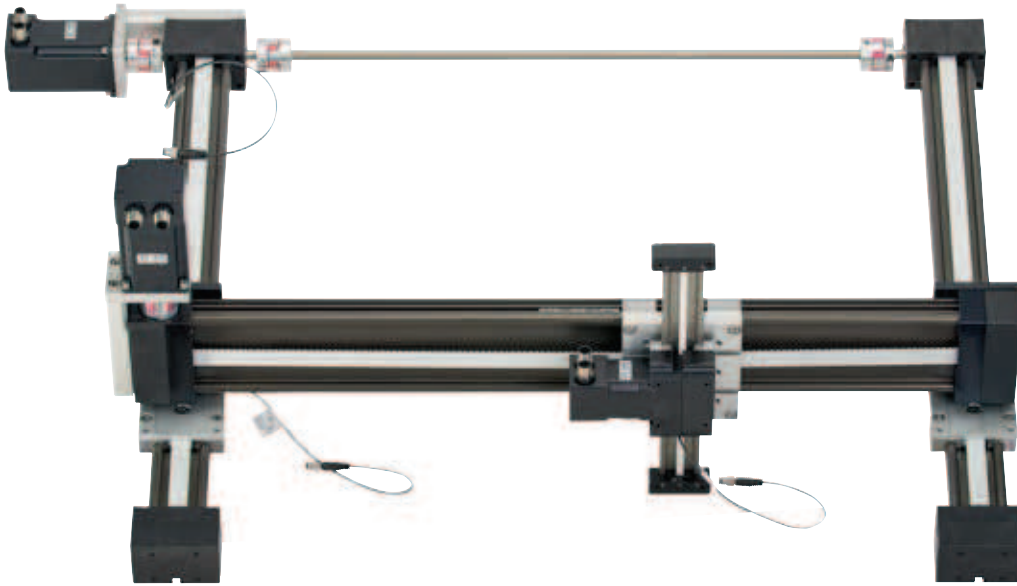

- **X-axis:** drylin® ZLW-1040 toothed belt axis with NEMA23 stepper motor with encoder
- **Y-axis:** drylin® ZLW-1080 toothed belt axis with NEMA23 stepper motor with encoder
- **Z-axis:** drylin® GRW cantilever axis with rack drive and NEMA17 stepper motor with encoder

## Technical data

|                           |                      |
|---------------------------|----------------------|
| <b>Workspace:</b>         | 500 x 500 x 100 mm   |
| <b>Max. speed:</b>        | 0.5 m/s              |
| <b>Max. acceleration:</b> | 1.5 m/s <sup>2</sup> |
| <b>Repeatability:</b>     | 0.8 mm               |
| <b>Load capacity:</b>     | 10 N                 |



Part No.  
DLE-RG-0001

