


1 Source: NLL, 99:1 coupler, AOM, EDFA (Shang Figs. 2-4 and 16)

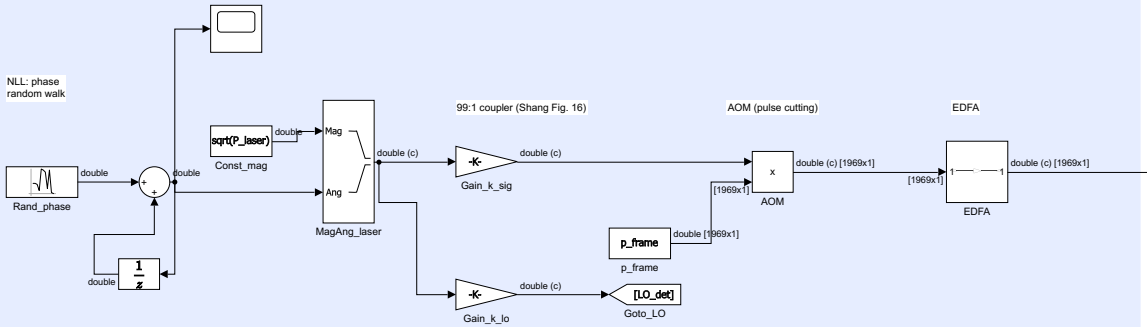


2 Circulator and fibre under test: coherent (Eq. 4) and incoherent

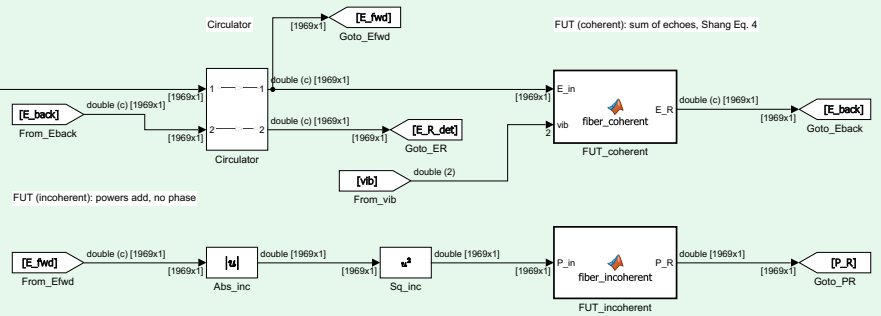

3 Detectors: OTDR (Fig. 2), Phi-OTDR (Fig. 3), COTDR (Fig. 4), with receiver noise

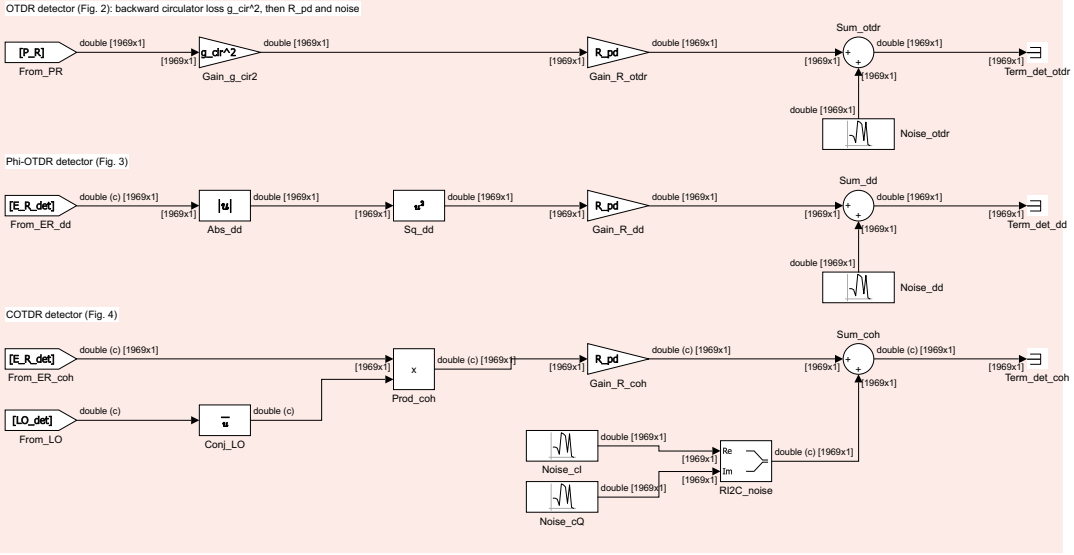

4 Vibration sources: two events



Goto/From tags: E_fwd = forward field to the incoherent branch, E_back = backscatter returning into the circulator,
E_R_det = backscatter to the detectors, LO_det = local oscillator, vib = vibration phases, P_R = OTDR backscattered power