


PRODUCT DATASHEET

PL LED 600 E 36W 840 U19

PANEL LED 600 | Square recessed panel luminaires, for 600 x 600 mm ceiling systems

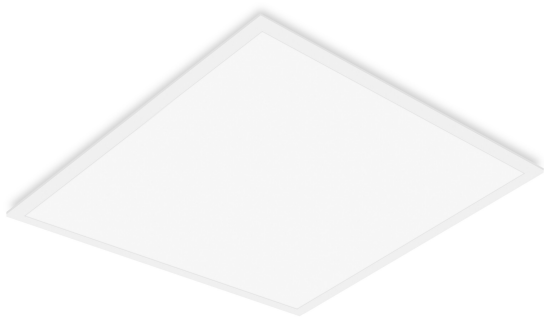

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

Product benefits

- Low flicker light thanks to special electronic control gear
- Energy savings thanks to system efficacy of up to 100 lm/W
- Versions with reduced glare (U19) for office applications available

Product features

- Extruded aluminum frame
- Polystyrene diffuser
- Lifetime (L80/B10): up to 35,000 h (at 25 °C)




TECHNICAL DATA

Electrical data


Nominal wattage	36.00 W
Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Nominal current	165.000 mA
Inrush current	18 A
Inrush current time T_{h50}	226 μ s
Max. number of luminaires per miniature circuit breaker B16	18
Max. number of luminaires per miniature circuit breaker C10	16
Max. number of luminaires per miniature circuit breaker C16	26
Power factor λ	> 0.90
Total harmonic distortion	< 20 %
Protection class	II
Surge capability (L-N)	1000 V
Operating mode	External LED driver

Photometrical data

Luminous flux	3600 lm
Luminous efficacy	100 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdcn
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG0
Beam angle	90 °
UGR	< 19

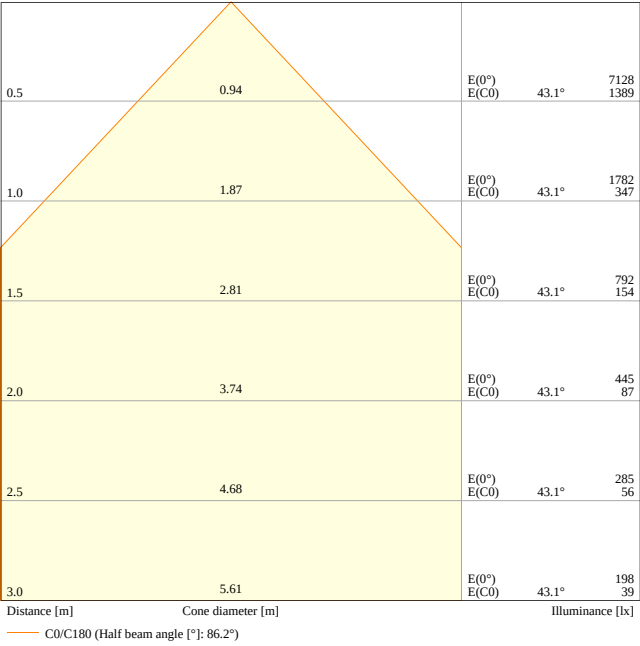


PL LED 600 E 36W 840 U19

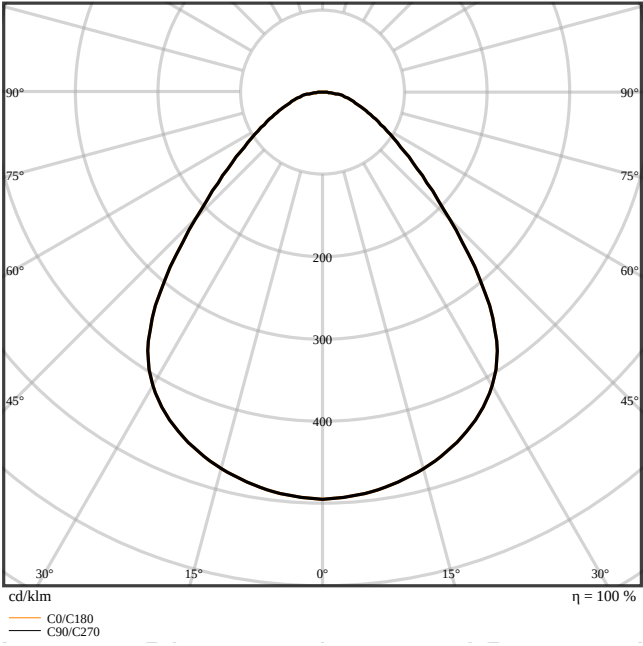

PL LED 600 E 36W 840 U19

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	31.00 mm
Product weight	1450.00 g



PL LED 600 E U19

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polystyrene (PS)
Light emitting surface material	Polystyrene
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+40 °C
Temperature range at storage	-20...+70 °C
Type of connection	Screwless terminal, 2-Pole (L, N)
Type of protection	IP40/IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting length	575 mm
Mounting width	575 mm
Mounting depth	50,0 mm
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	35000 h ¹⁾
Number of switching cycles	15000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	900 mA
ECG - Output ripple current	< 8 %
ECG - Length	118.0 mm
ECG - Width	42 mm

ECG - Height	28 mm
Recommended control gear	LEDV STS 36W 0.9A 40V 230V I WL G2

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE / CB / UKCA / EAC / DEKRA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Accessories Optional

Product image	Product name	EAN
	PANEL 600 SURFACE MOUNT KIT H75	4058075472914
	PANEL 600 SURFACE MOUNT KIT H70 VAL	4058075402843
	PANEL 600 RECESSED MOUNT FRAME	4058075402881
	PANEL Suspension Kit	4058075402928
	CONNECTOR BOX 5POLE L/N 4x	4058075473010

EQUIPMENT / ACCESSORIES

- Accessories for several mounting options available
- Security rope for luminaire included
- External control gear included

Safety advice

- All electrical connections must be made by a qualified person.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire must be disposed of.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	G11251529 PANEL LED 600
	Legal information	Safety Insert G11207793
	Legal information	Legal Insert G11146927
	Legal information	PL LED 600 E 36W
	Declarations of conformity	PANEL LED 600
	Declarations of conformity UKCA	PANEL LED 600
Photometric and lighting design files		Document name
	IES file (IES)	PL LED 600 E 36W 840 U19
	LDT file (Eulumdat)	PL LED 600 E 36W 840 U19
	UGR file (UGR table)	PL LED 600 E 36W 840 U19
	Light distribution curve type cone	PL LED 600 E 36W 840 U19
	Light distribution curve type polar	PL LED 600 E 36W 840 U19
CAD/BIM files		Document name
	BIM Revit 3D	Panel LED
	CAD STEP 3D	PL LED 600


Tender texts	Document name
 Tender documents	PANEL LED 600 36W 840 U19-en

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854705052	Folding box 1	37 mm x 602 mm x 653 mm	1874.00 g	14.54 dm³
4099854705069	Shipping box 6	725 mm x 230 mm x 675 mm	12429.00 g	112.56 dm³
4099854850684	Shipping box 5	680 mm x 203 mm x 630 mm	10518.00 g	86.97 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

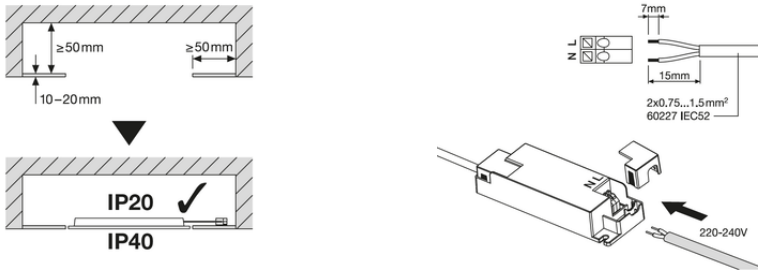

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.