







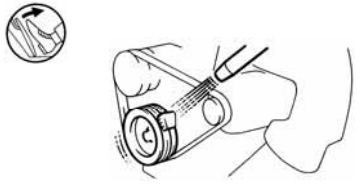

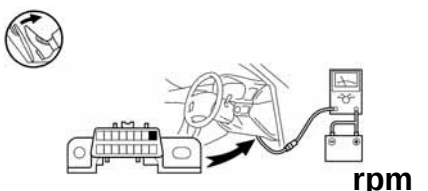






 liter (US qts, Imp. qts)		
	1.85 to 1.95 (1.96 to 2.06, 1.63 to 1.71)	Standard 4.15 to 4.25 (4.39 to 4.49, 3.66 to 3.74) w/ LSD w/ Differential Lock 4.10 to 4.20 (4.34 to 4.43, 3.60 to 3.69)
	Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent	w/o LSD Toyota Genuine Differential gear oil LT 75W-85 GL-5 or equivalent w/ LSD Toyota Genuine Differential gear oil LX 75W-85 GL-5 or equivalent
N*m (kgf*cm, ft*lbf)	A	37 (380, 27)
	B	20 (204, 15)
	C	37 (377, 27)
	D	39 (400, 29) 49 (500, 36)
		GRJ, UZJ
 N*m (kgf*cm, ft*lbf)		For Aluminum Wheel 131 (1336, 97) For Steel Wheel 209 (2131, 154)
		GRJ, UZJ
 mm (in.)		30 (1.18)
		
 	Please refer to the Repair Manual Pub. No. RM810E (Service Specification)	
 kPa (kgf/cm², psi)	Please refer to the Repair Manual Pub. No. RM810E (Service Specification)	

*1: When brake pedal is depressed with the force of 490 N (50 kgf, 110.2 lbf) while the engine is running.

		GRJ, UZJ	
		1.25 to 1.29	
20°C (68°F)			
		1GR-FE	2UZ-FE
cm ³ or cc (cu. in.)		3956 (241.4)	4664 (284.5)
	DENSO	K20HR-U11	SK20R11
	NGK	LFR6C11	IFR6A11
	A mm (in.)	1.3 (0.039 to 0.043)	1.1 (0.043)
		8 to 12°*1 (DLC3 Terminals 13 (TC) - 4 (CG) Connected)	5 to 15° (DLC3 Terminals 13 (TC) - 4 (CG) Connected)
		0.15 to 0.25 (0.00591 to 0.00984)	
		0.29 to 0.39 (0.0114 to 0.0154)	0.25 to 0.35 (0.00984 to 0.0138)
		650 to 750*1	
		1300 (13.3, 189)	1373 (14.0, 199)
		↑ 1000 (10.2, 145)	↑ 1030 (10.5, 149)
		↓ 100 (1.0, 15)	↓ 98 (1.0, 14.2)

		↑ 29 (0.3, 4.2)	
	3000 rpm	↑ 294 to 588 (3.0 to 6.0, 43 to 85)	
kPa (kgf/cm ² , psi)			
		1GR-FE	2UZ-FE
		4.9 (5.2, 4.3)	5.7 (6.0, 5.0)
		5.2 (5.5, 4.6)	6.2 (6.6, 5.5)
	10W-30*2: API grade SL "Energy-Conserv ing", SM "Energy-Conserv ing" or ILSAC multigrade engine oil 10W-30 API grade SL and SM multigrade engine oil		
liter (US qts, Imp. qts)			
N*m (kgf*cm, ft*lbf)		40 (408, 30)	39 (398, 29)
		w/o Rear Heater 12.0 (12.7, 10.6) w/ Rear Heater 14.6 (15.4, 12.8)	
		w/o Rear Heater 11.2 (11.8, 9.9) w/ Rear Heater 14.4 (15.2, 12.7)	w/o Transmission Oil Cooler Front Heater Only 13.4 (14.2, 11.8) Front and Rear Heater 16.3 (17.2, 14.3) w/ Transmission Oil Cooler Front Heater Only 14.1 (14.9, 12.4) Front and Rear Heater 16.9 (17.9, 14.9)







*1: Transmission in neutral position and A/C switch OFF. *2: 10W-30 is the best choice for good fuel economy and good starting in cold weather.



LAND CRUISER Station Wagon

Diesel

VDJ200

2007/08-

		VDJ	
		1.25 to 1.29	
20°C (68 °F)			
		1VD-FTV	
cm ³ or cc (cu. in.)		4461 (272.2)	
		Approximately 1	
20°C (68 °F)			
Ohm			
		⬆ 40°C (104 °F): 1	
		⬇ 40°C (104 °F): Maximum 21	
secs			
		500 to 600	
		550 to 650	
			
		4700 to 4900	
rpm			
		2700 (27.5, 392)	
		⬆ 2200 (22.4, 319)	
		⬇ 500 (5.1, 73)	
kPa (kgf/cm ² , psi)			

		VDJ	
		⬆ 50 (0.5, 7.3)	
2500 rpm		⬆ 230 (2.3, 33)	
kPa (kgf/cm ² , psi)			
		VDJ	
		8.0 (8.5, 7.0)	
		9.0 (9.5, 8.0)	
		G-DLD-1, API CF-4, CF or ACEA B1 (You may also use API CE or CD)	
liter (US qts, Imp. qts)			
		13 (127, 9)	
N*m (kgf*cm, ft*lbft)			
		15.4 (16.3, 13.5)	
liter (US qts, Imp. qts)		Front Heater Only 14.8 (15.6, 13.0) Front Heater and Rear heater 17.6 (18.6, 15.5) Front Heater*1 15.2 (16.1, 13.4) Front Heater and Rear Heater*1 18.0 (19.0, 15.4)	

*1: with Viscous Heater