


ROOF SIDE INNER REAR PANEL (ASSY)

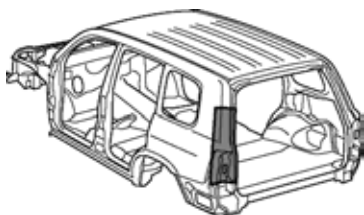

F29241A

With the quarter panel reinforcement removed.

Symbol meaning

REMOVAL


▲ ▲ : Remove Weld Points

INSTALLATION


◻ ■ : Plug Weld

F29241B

REMOVAL-INSTALLATION

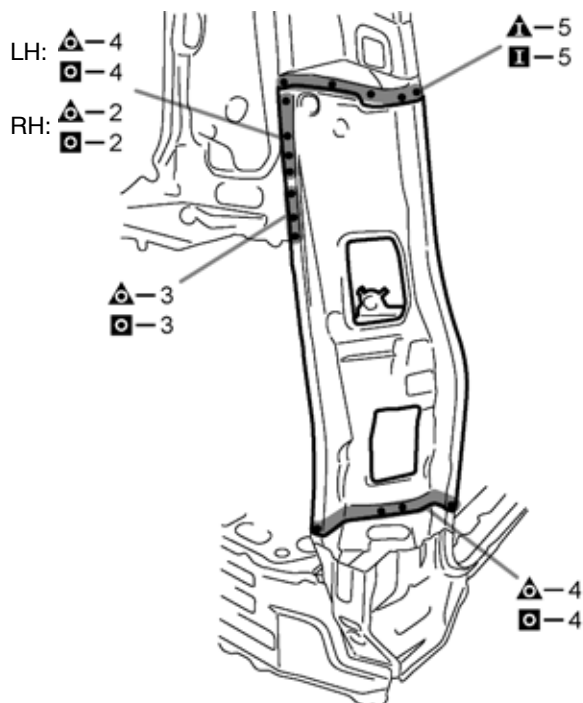

[w/ Rear No. 2 Seat
(except Face to Face Seat Type)]

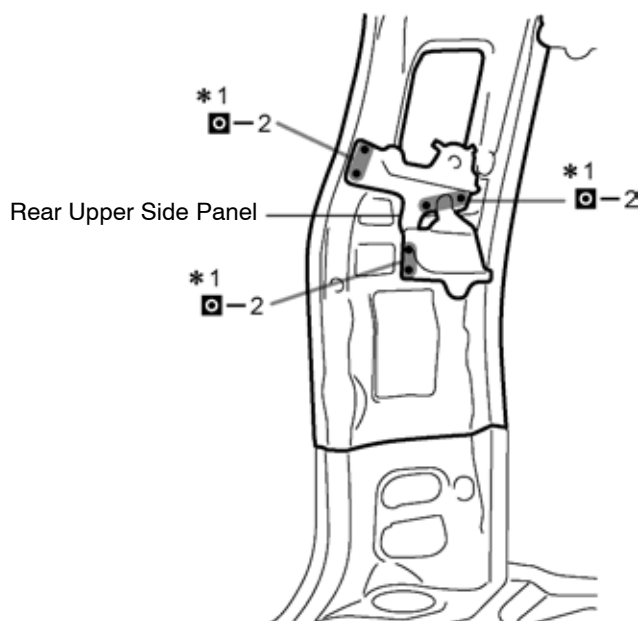

F29241

INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- 2 *1 is only for installation.
- 3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.