

REAR FLOOR NO. 5 CROSSMEMBER (ASSY)



F29252A

With the rear floor pan removed.

Symbol meaning

REMOVAL




△ : Remove Weld Points

INSTALLATION

◻ : Plug Weld

F29252B

REMOVAL-INSTALLATION

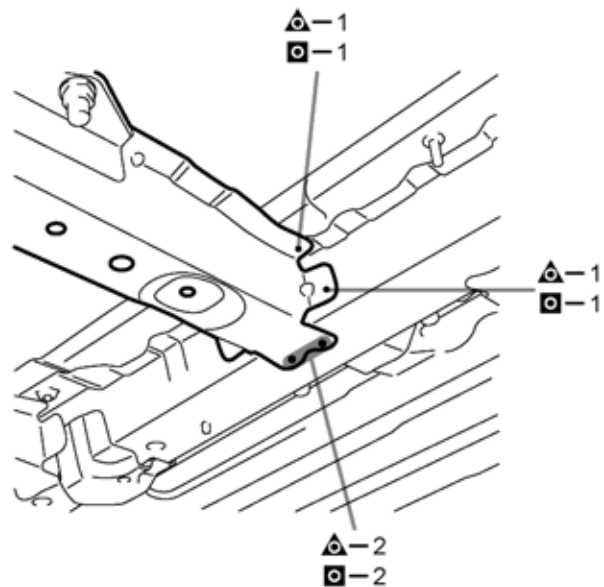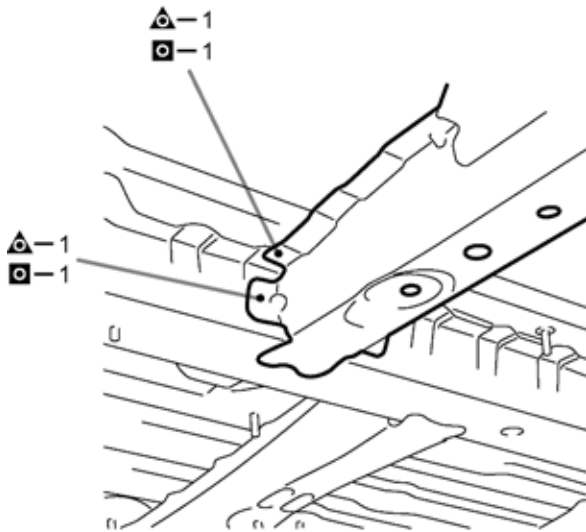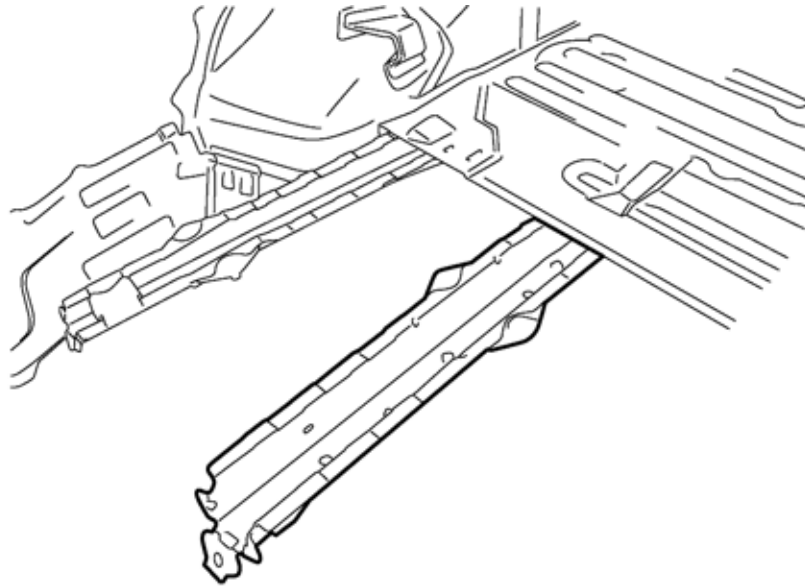

F29252

INSTALLATION POINT

- 1 After welding, apply undercoating to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.