


4. COMPONENTS

(a) FRONT BUMPER



for 1GR-FE, 2UZ-FE:

UPPER RADIATOR SUPPORT SEAL

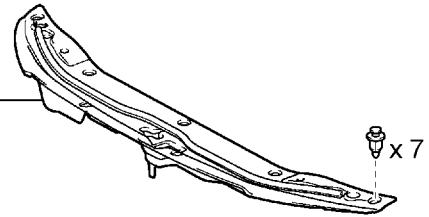


for 1VD-FTV:

UPPER RADIATOR SUPPORT SEAL

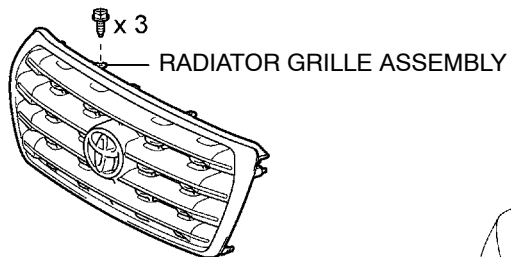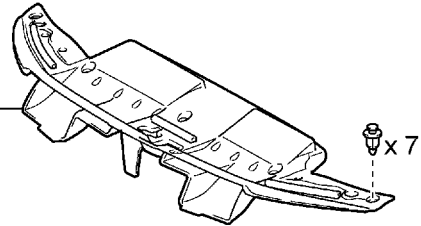



RADIATOR GRILLE ASSEMBLY


FRONT FENDER SPLASH SHIELD
SUB-ASSEMBLY RH

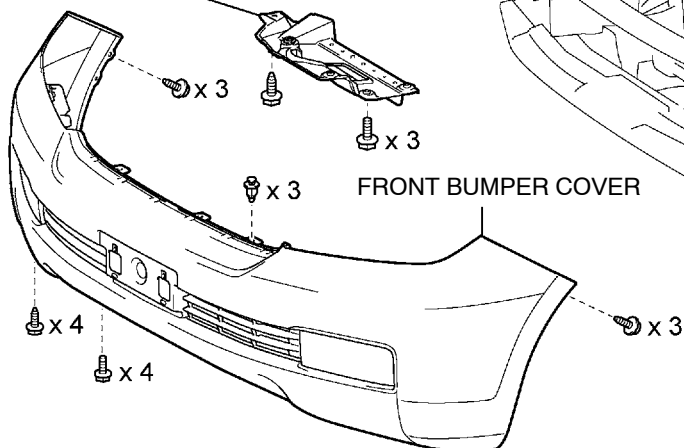

FRONT BUMPER COVER


FRONT FENDER SPLASH SHIELD SUB-ASSEMBLY LH

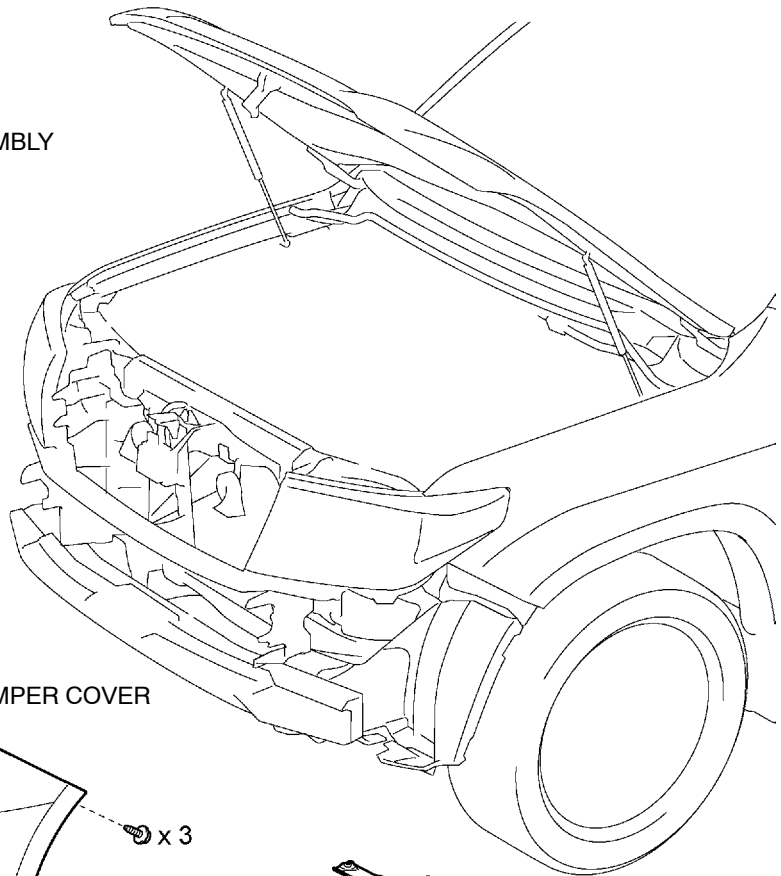


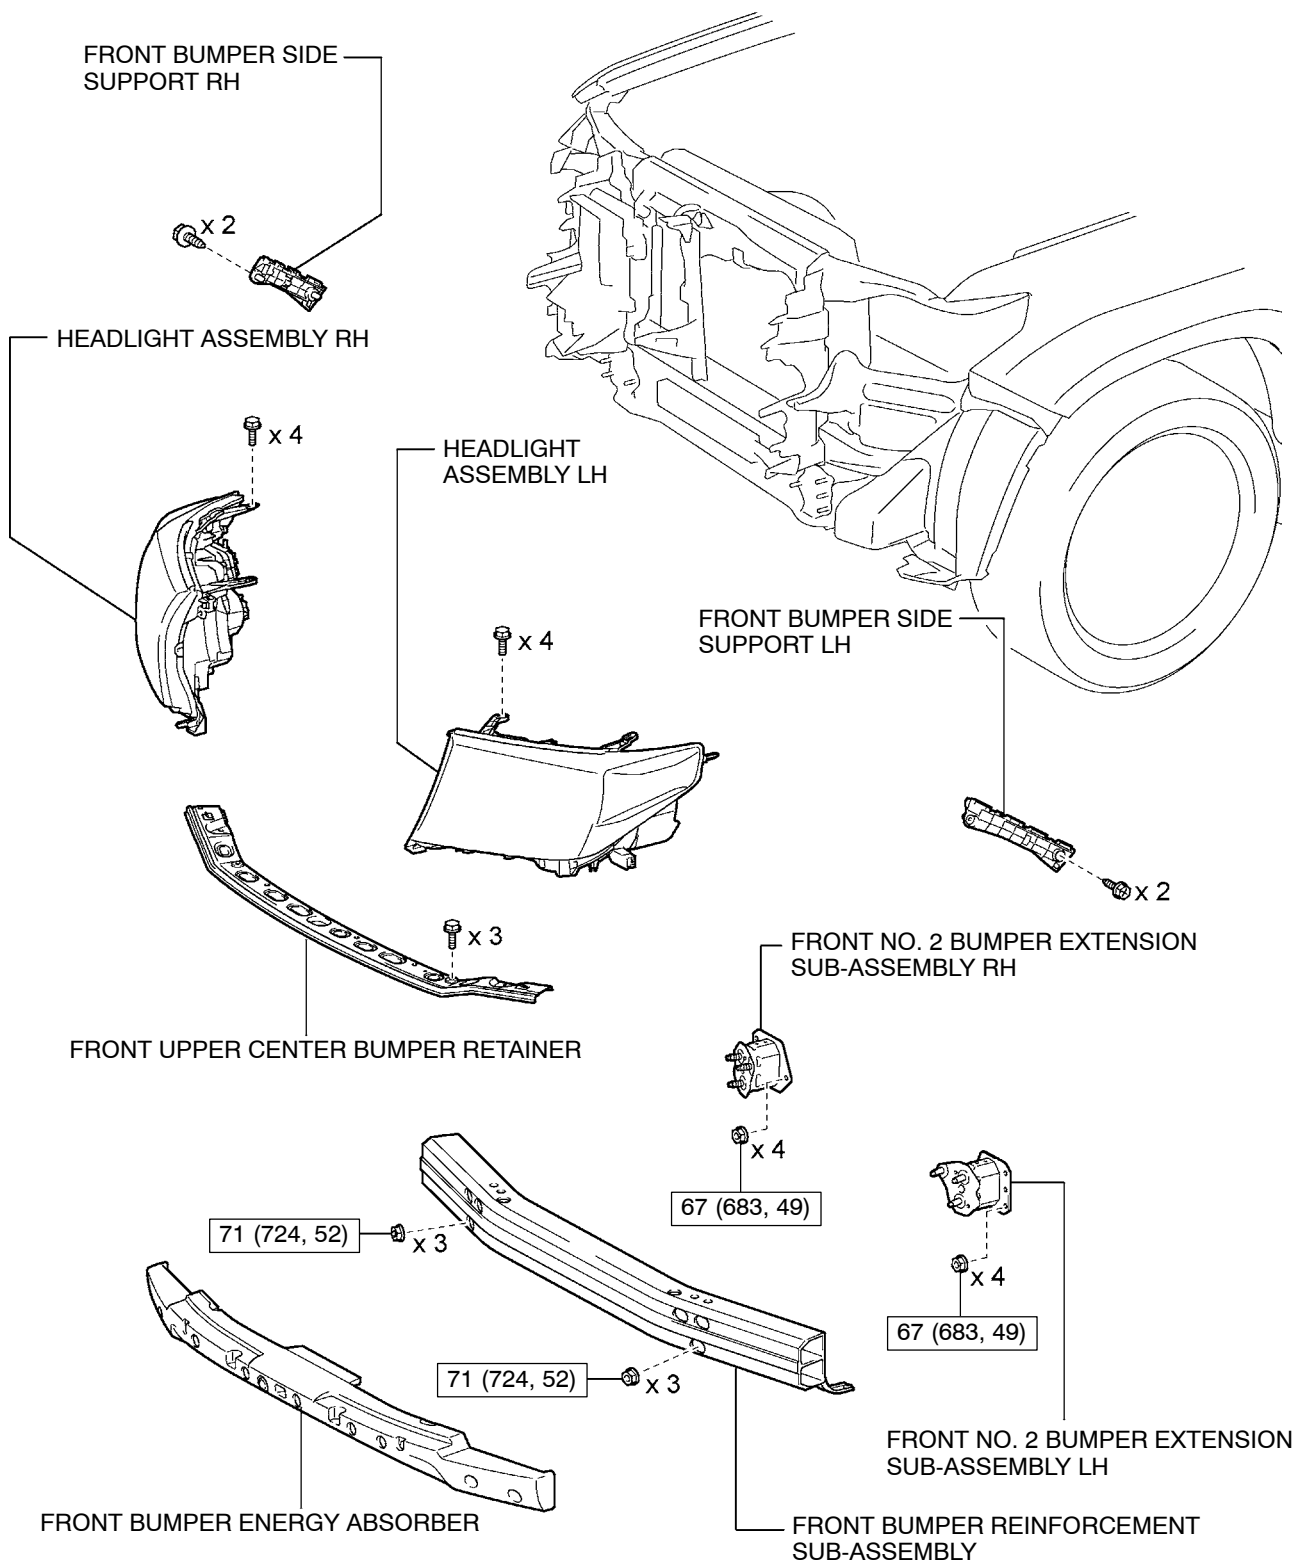**CAUTION:**

The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft.·lbf) : Specified torque

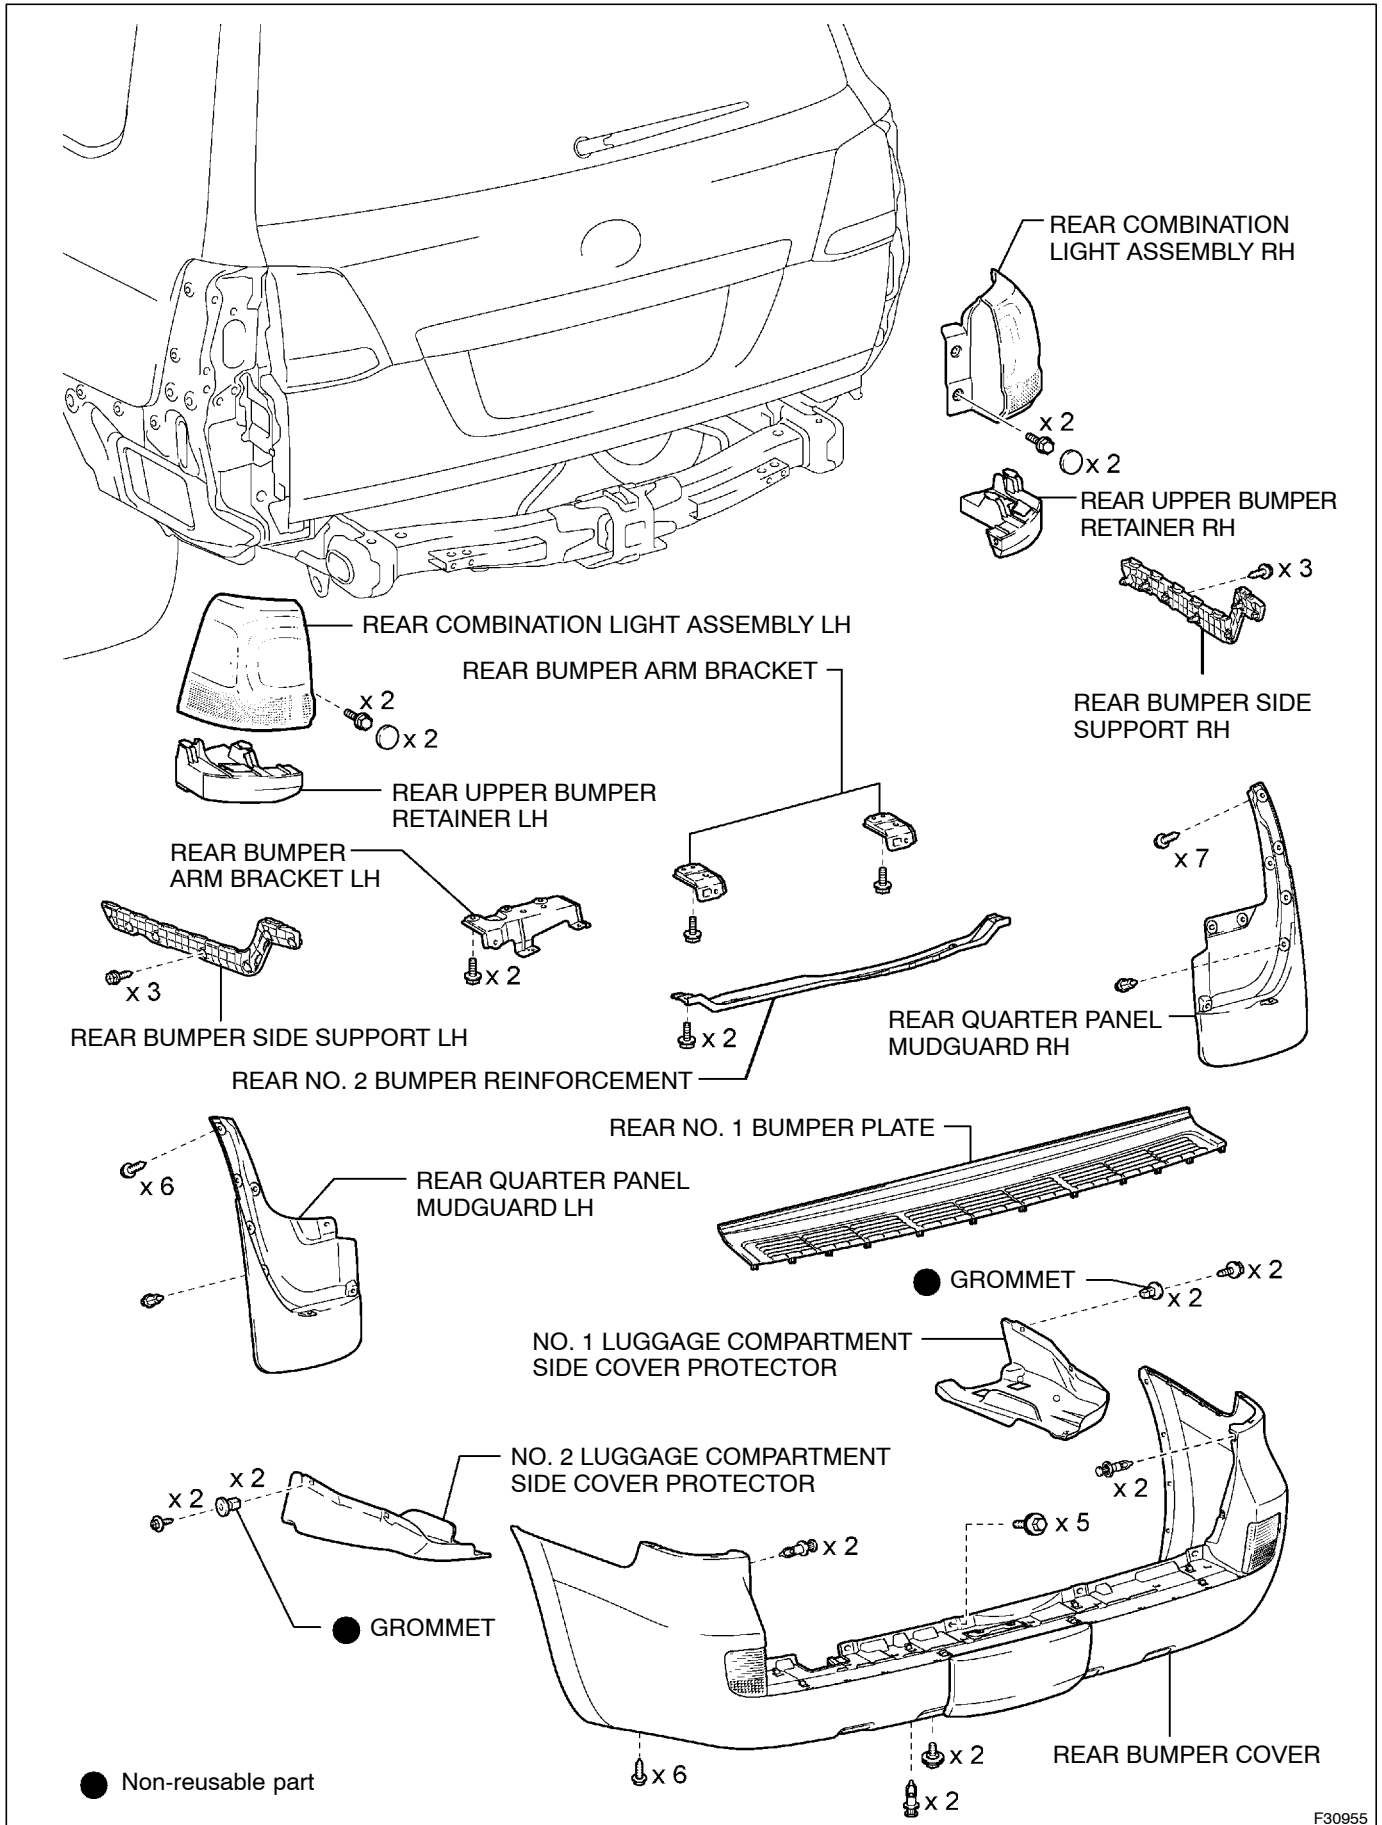(b) REAR BUMPER

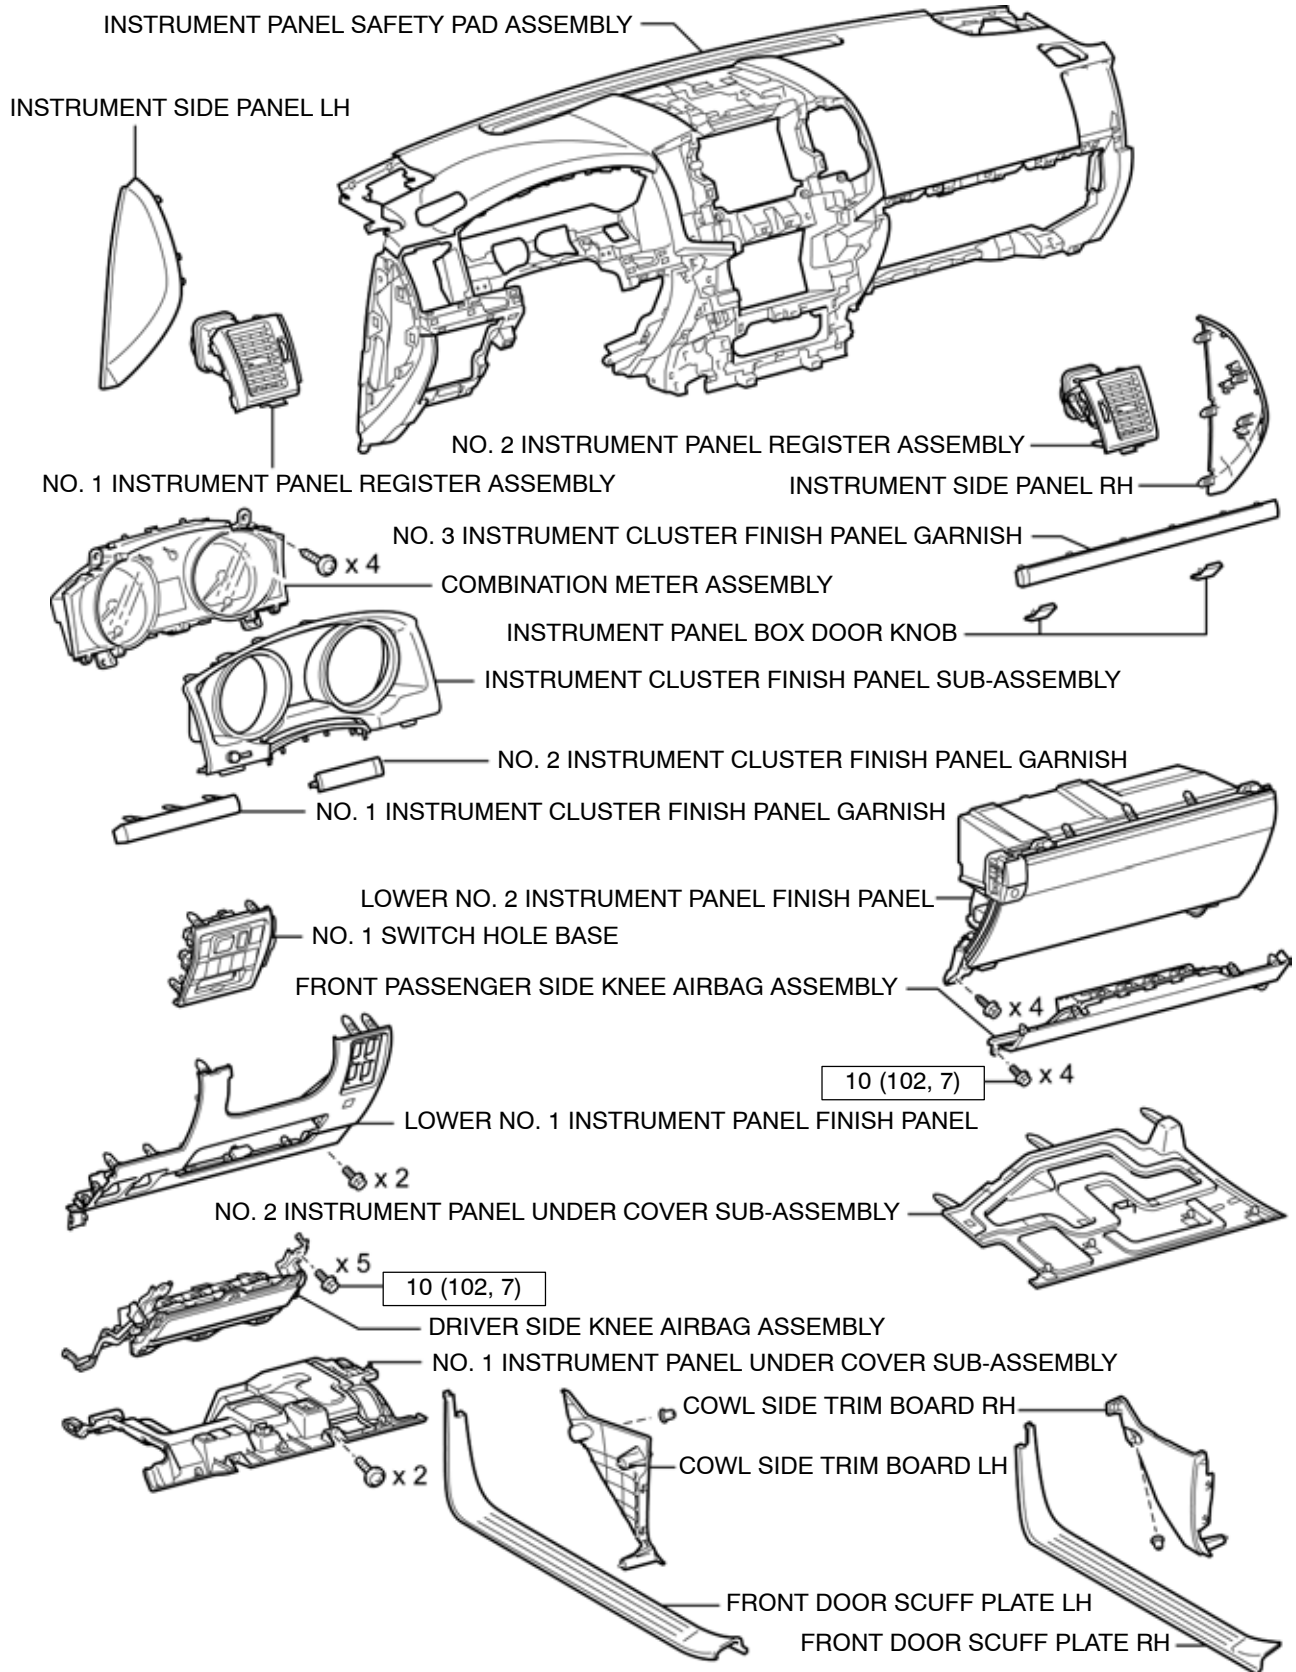(c) INSTRUMENT PANEL**CAUTION:**


The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft·lbf) : Specified torque

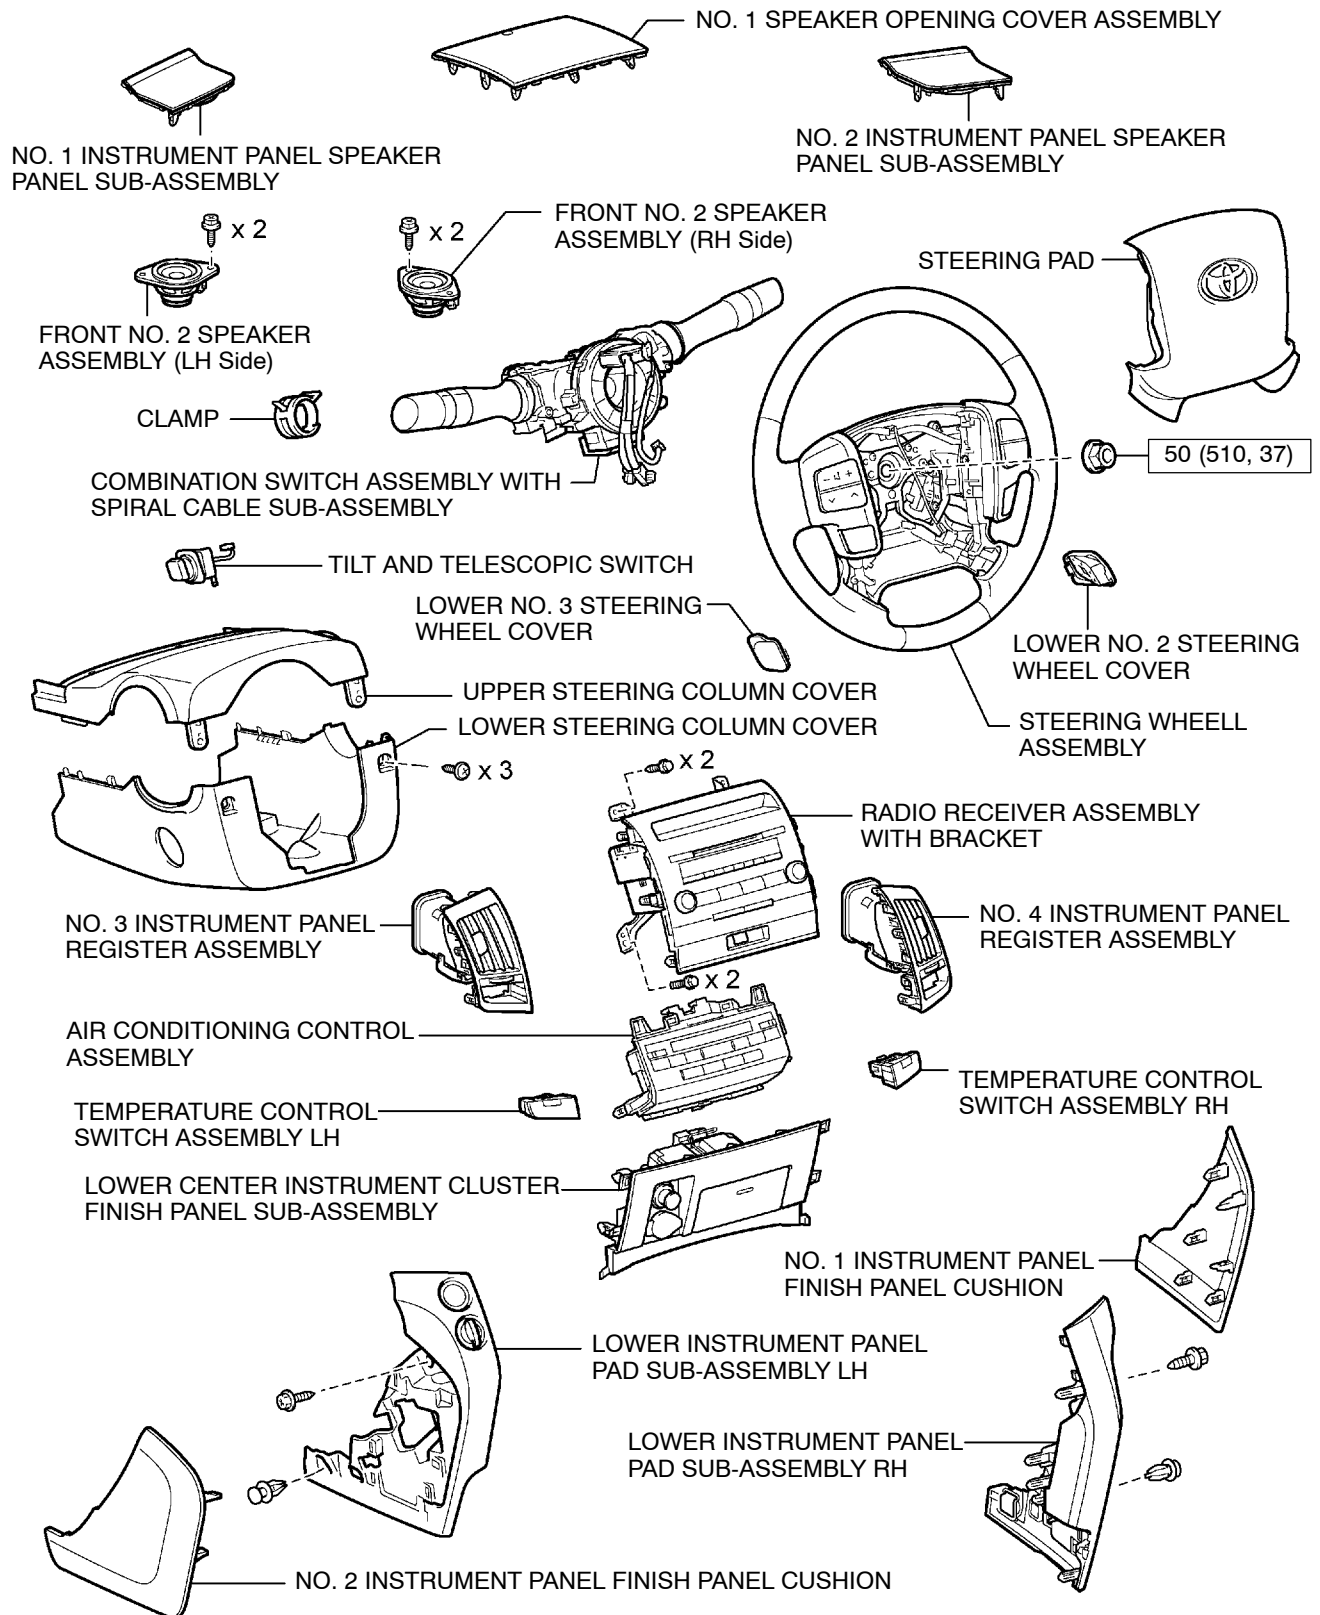
**CAUTION:**


The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft·lbf) : Specified torque

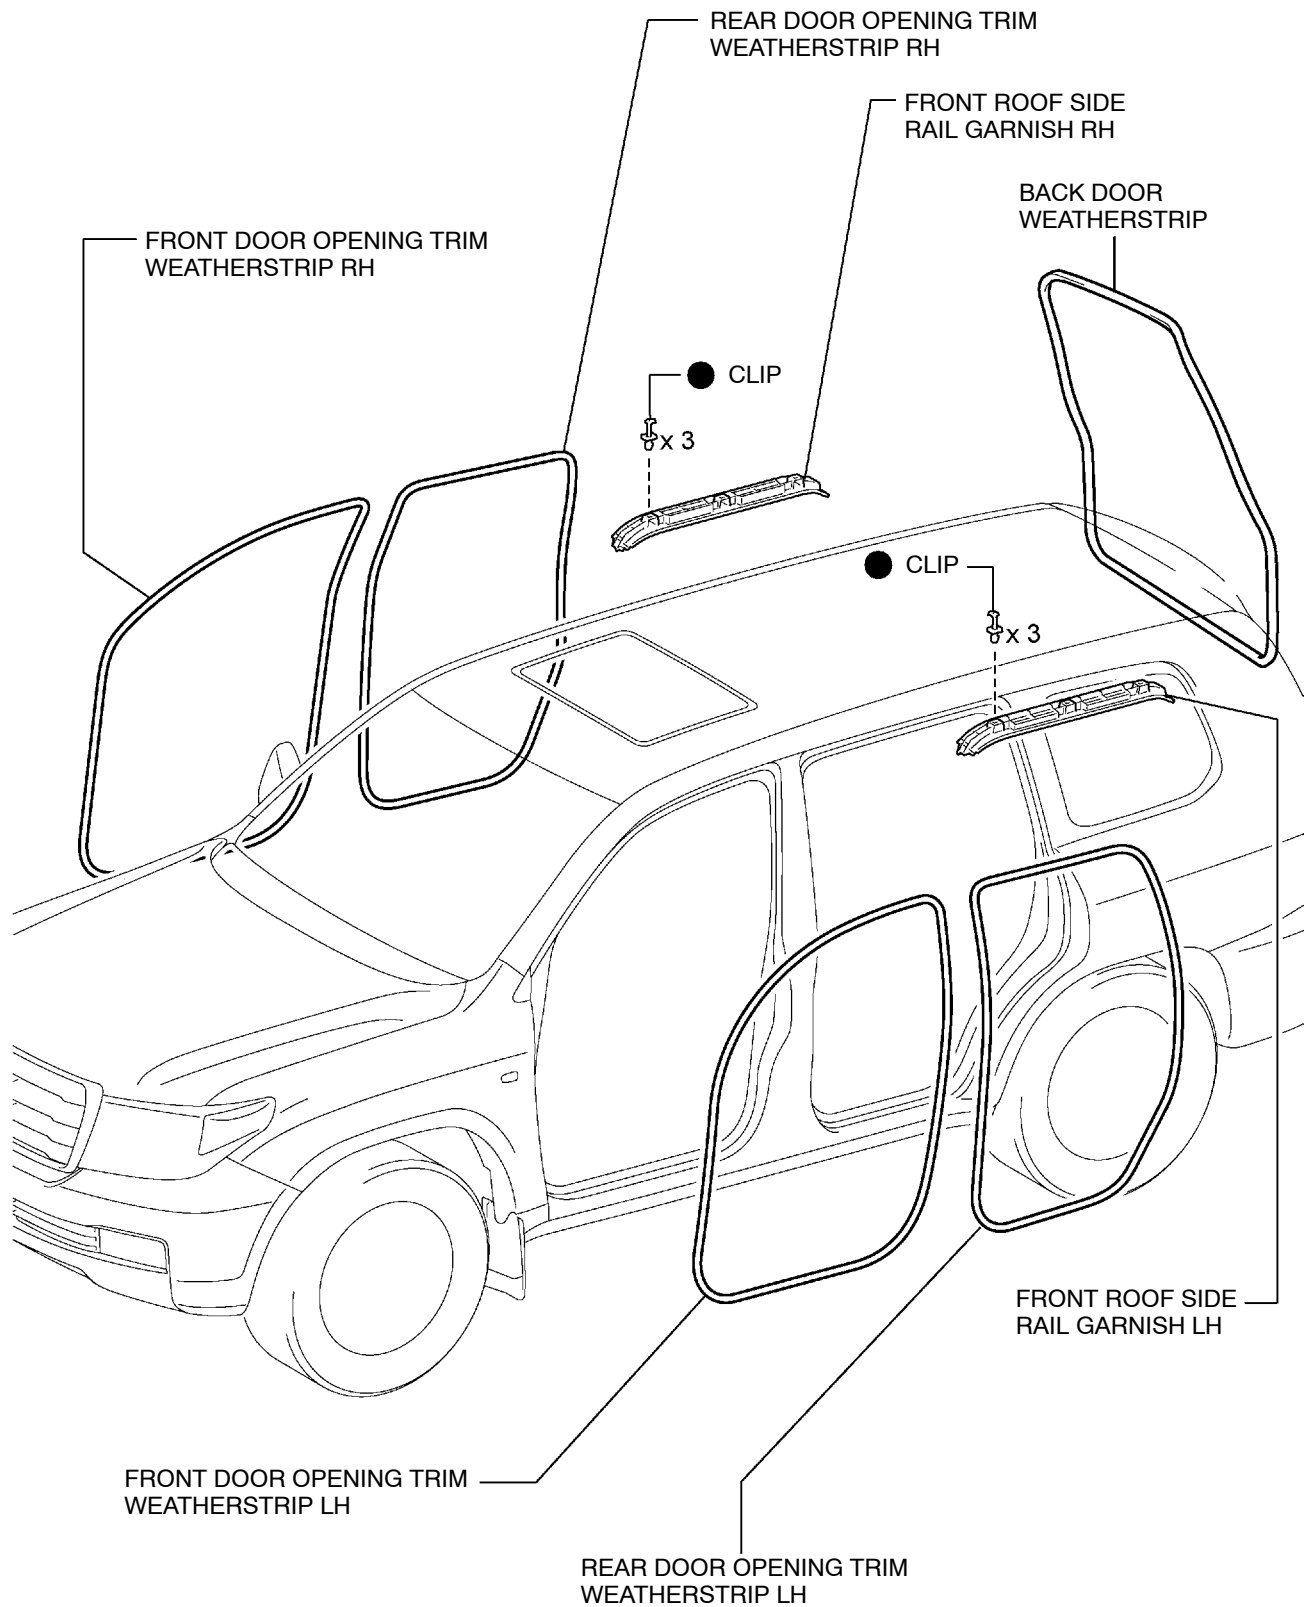(d) INTERIOR TRIM


● Non-reusable part

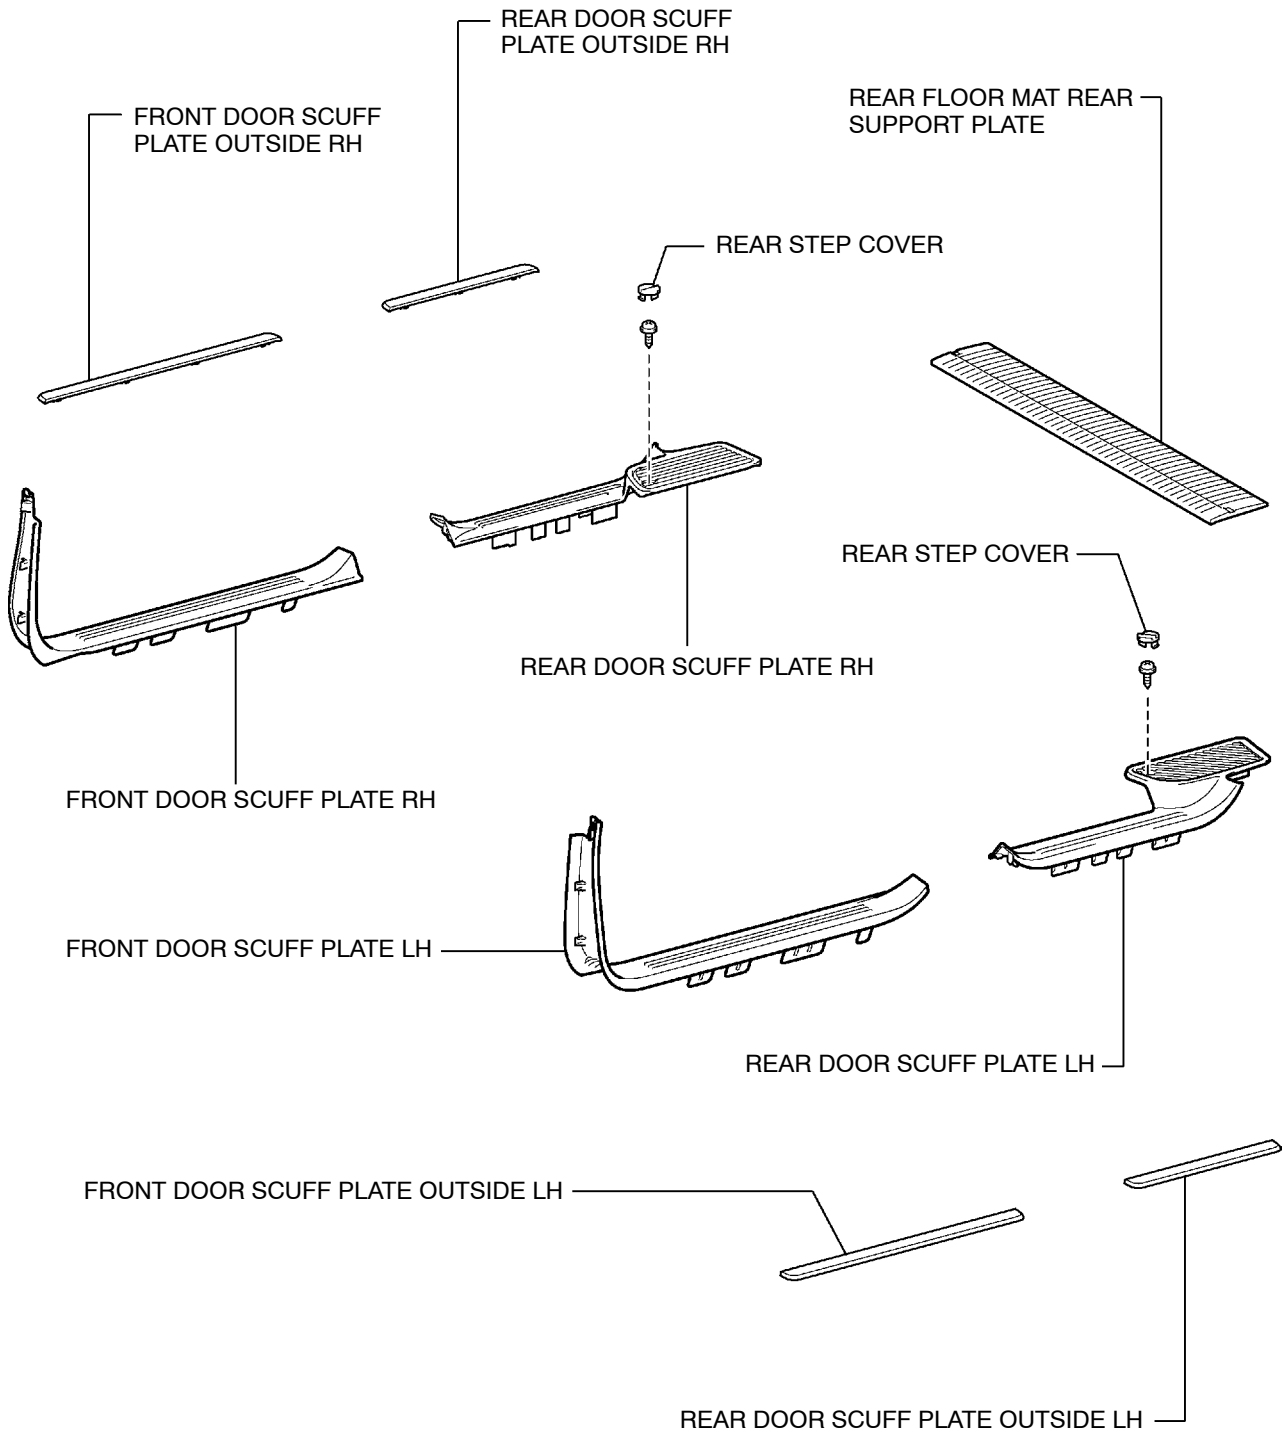

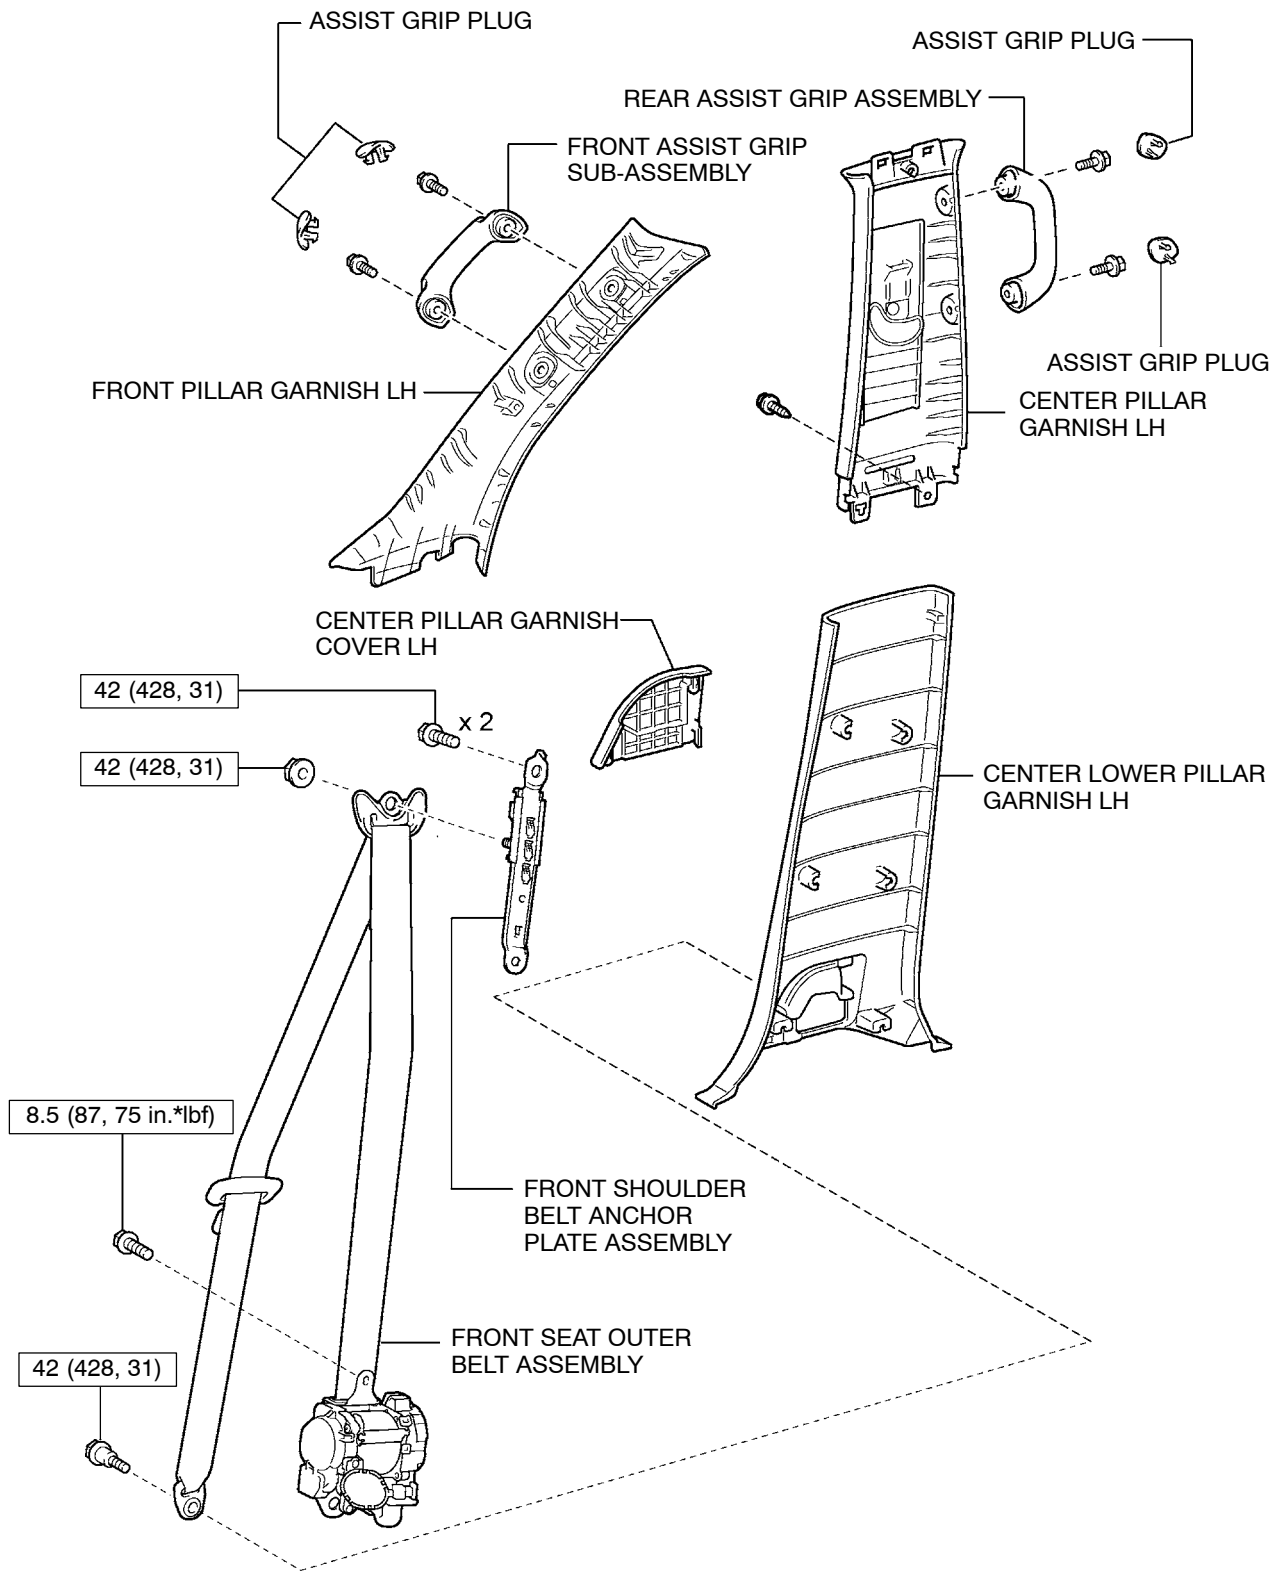**CAUTION:**


The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft.·lbf) : Specified torque

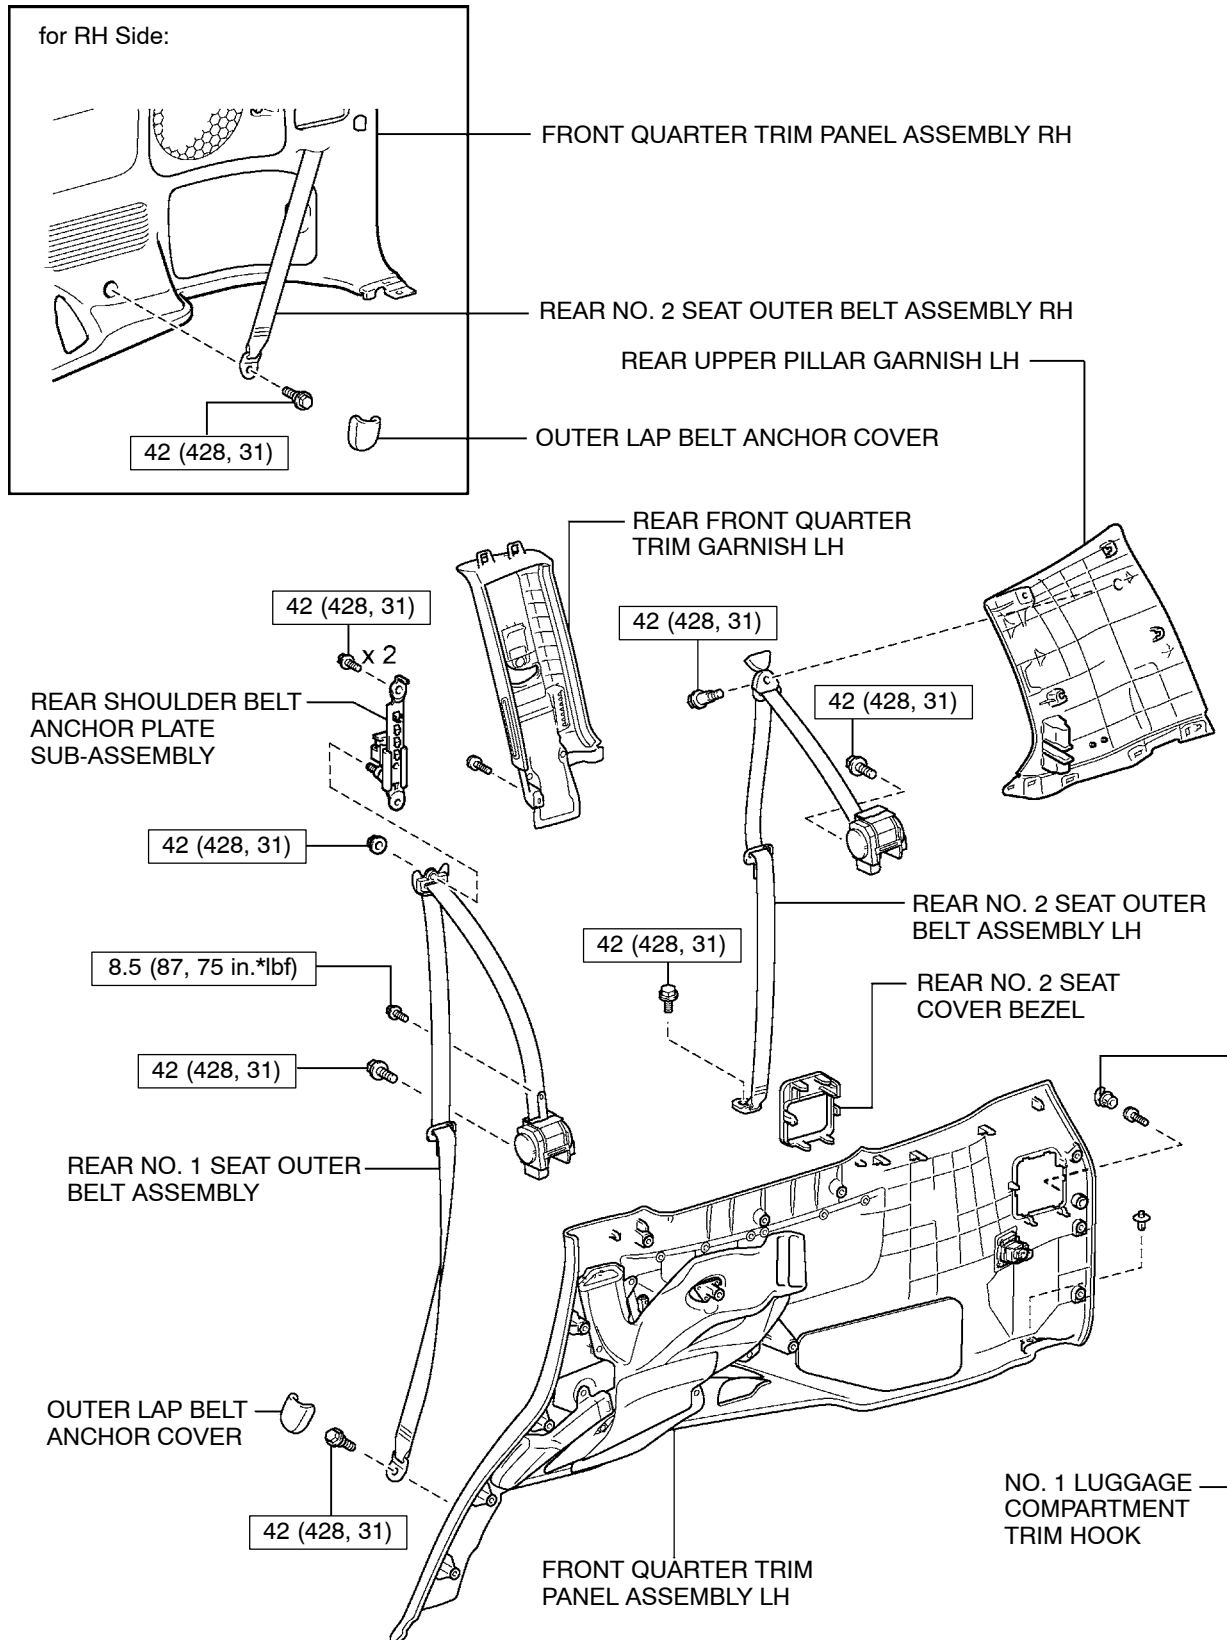**CAUTION:**


The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft.·lbf) : Specified torque

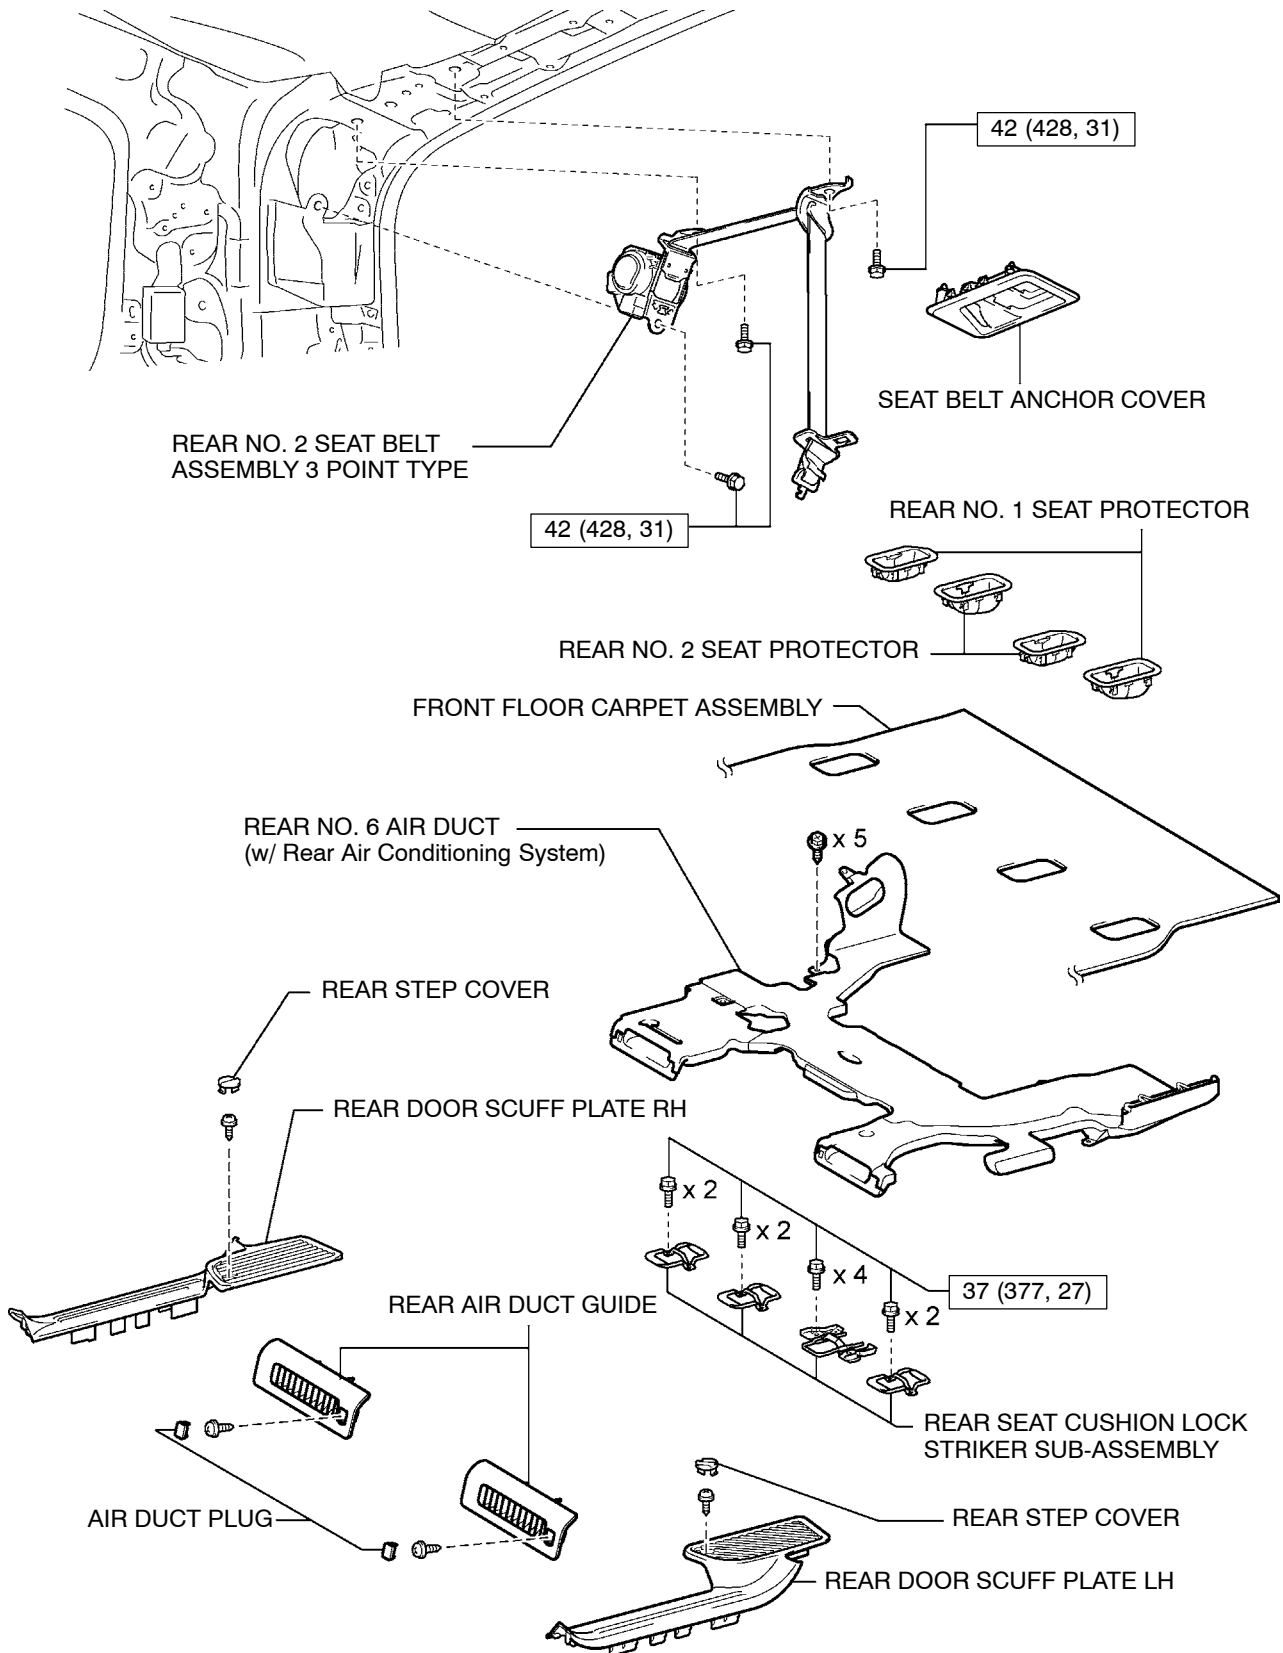**CAUTION:**

The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft·lbf) : Specified torque

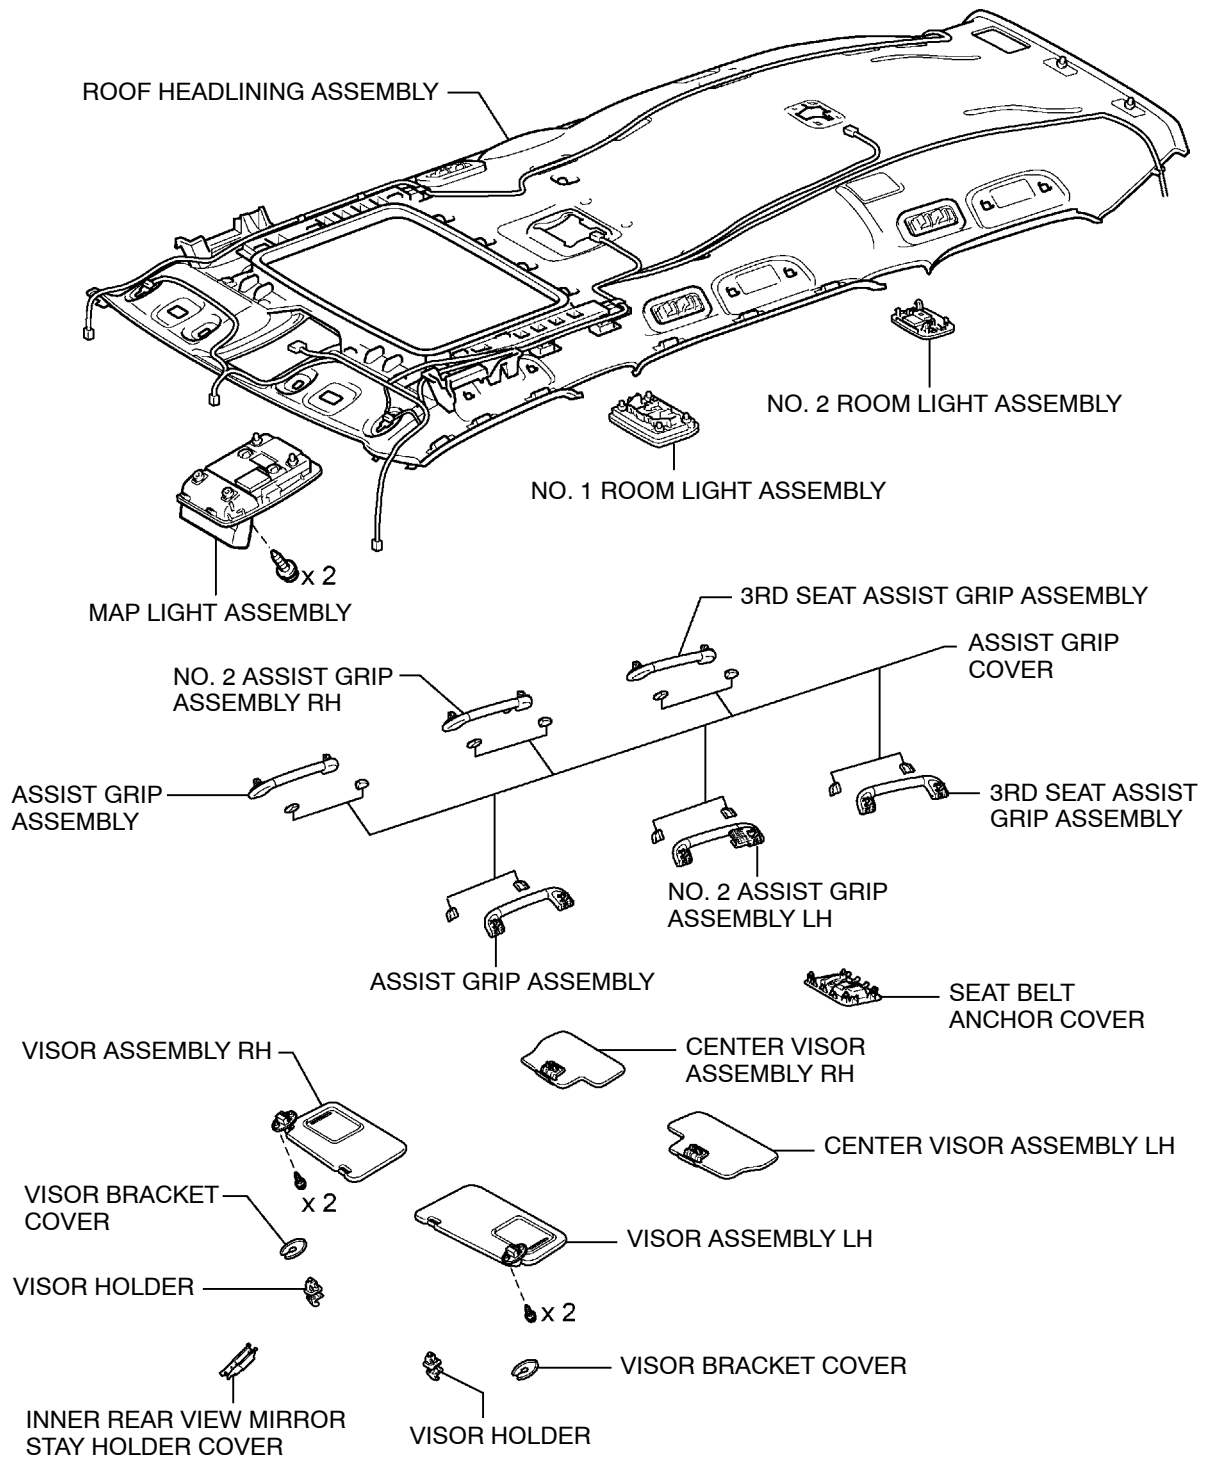

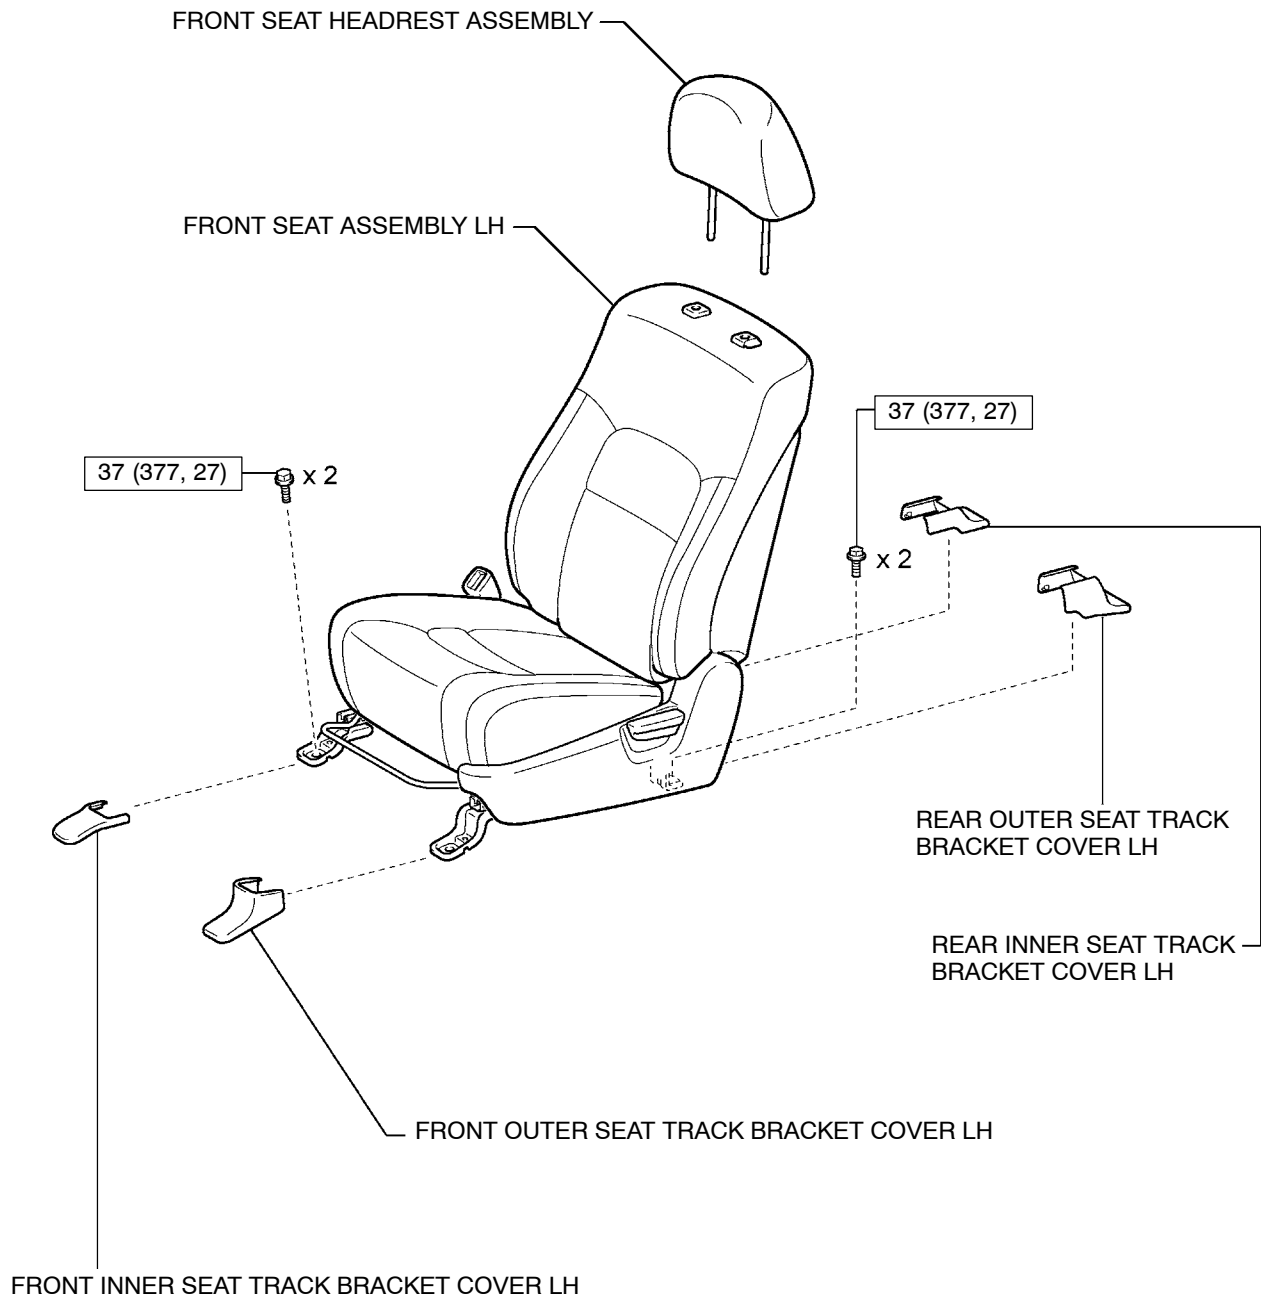(e) FRONT SEAT**CAUTION:**

The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft·lbf) : Specified torque

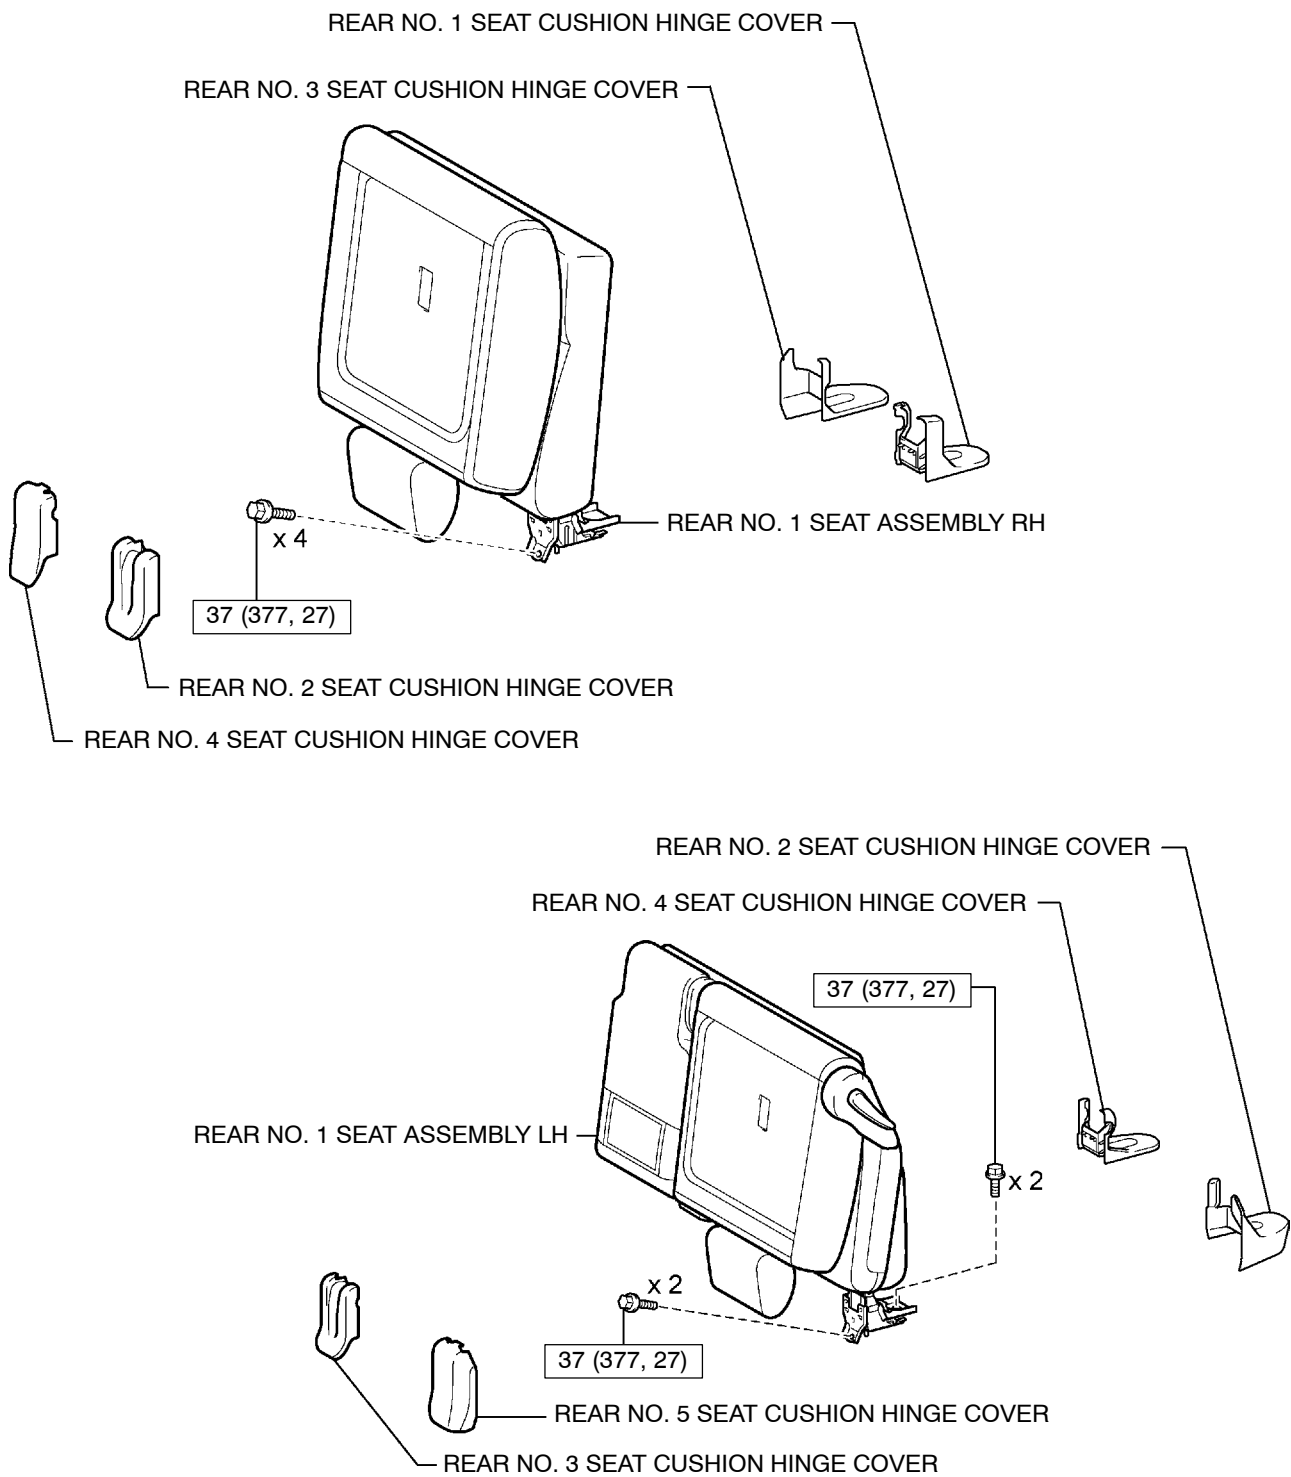(f) REAR SEAT**CAUTION:**

The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.


N·m (kgf·cm, ft.·lbf) : Specified torque

LH Side:

REAR NO. 2 SEAT HEADREST
ASSEMBLY LH




REAR SEAT CUSHION HINGE
COVER LH

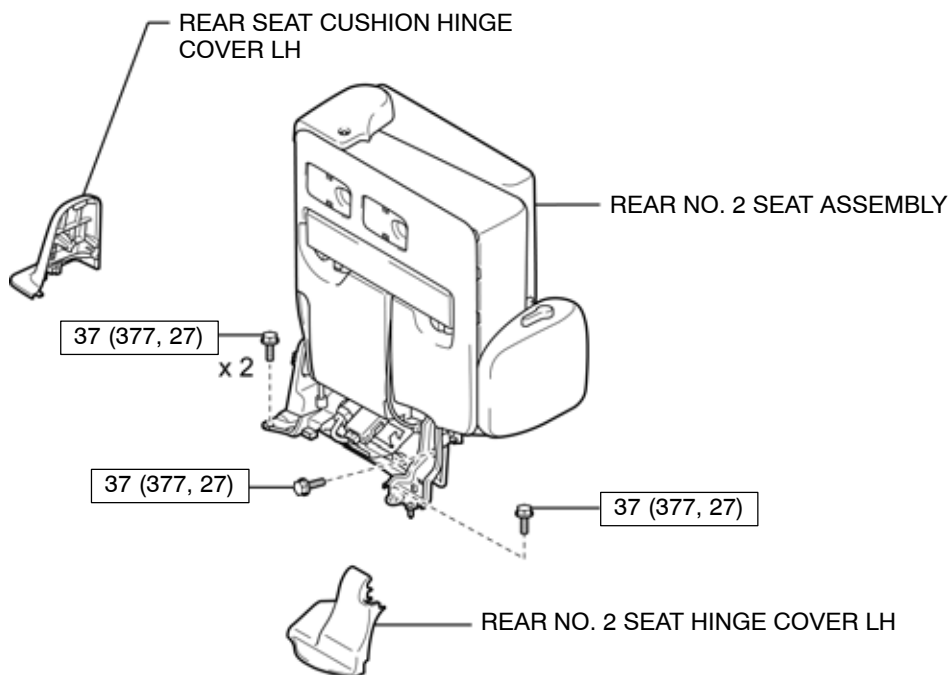

REAR NO. 2 SEAT HINGE COVER LH

NO. 3 SEAT CUSHION
COVER

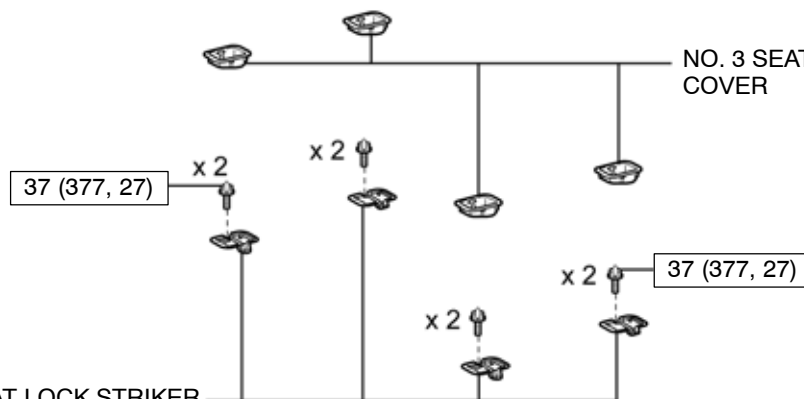

REAR SEAT LOCK STRIKER
SUB-ASSEMBLY

CAUTION:

The bolts and nuts must be tightened to the torque specification, as they are related to vehicle safety during a collision.

N·m (kgf·cm, ft·lbf) : Specified torque