


5. WHEEL ALIGNMENT STANDARD

(a) FRONT WHEEL ALIGNMENT (USA, Canada)

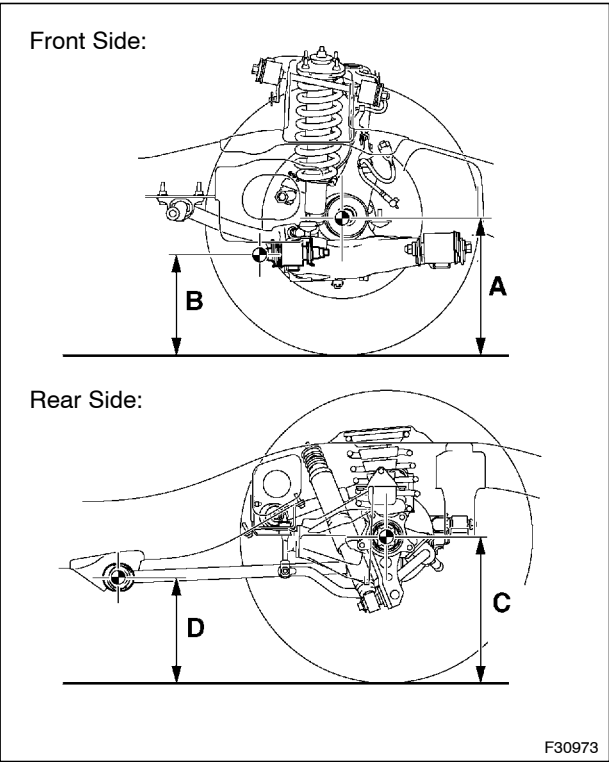

(1) Standard vehicle height (unloaded vehicle):

Measuring points:


A: Ground clearance of the front drive shaft center

B: Ground clearance of the front adjusting cam bolt center

C: Ground clearance of the rear axle shaft center

D: Ground clearance of the rear lower control arm front side center

Front A - B	Rear C - D
97 mm (3.82 in.)	77 mm (3.03 in.)

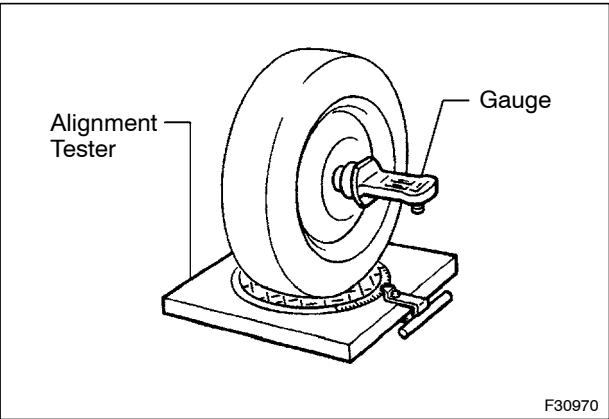

(2) Standard camber inclination (unloaded vehicle):

Camber Inclination	
Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less

(3) Standard caster inclination (unloaded vehicle):


Caster Inclination	
Caster Left - right error	2°54' +/-45' (2.90° +/-0.75°) 45' (0.75°) or less

(4) Standard steering axis inclination (unloaded vehicle):

HINT:


The steering axis inclination is a reference value.

Steering Axis Inclination (Reference)	
Steering Axis	12°51' (12.85°)

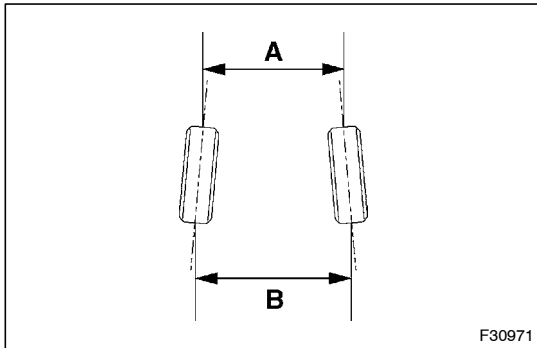


(5) Standard toe-in (unloaded vehicle):

Item	Standard toe-in
Toe-in (total)	B - A: 3 +/-2 mm (0.118 +/-0.0787 in.)

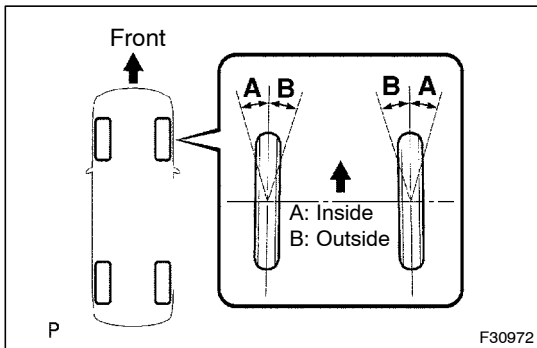

(6) Standard wheel turning angle (unloaded vehicle):

Inside Wheel Angle	Outside Wheel Angle (Reference)
33°31' to 36°31' (33.52° to 36.52°)	32°13' (32.21°)

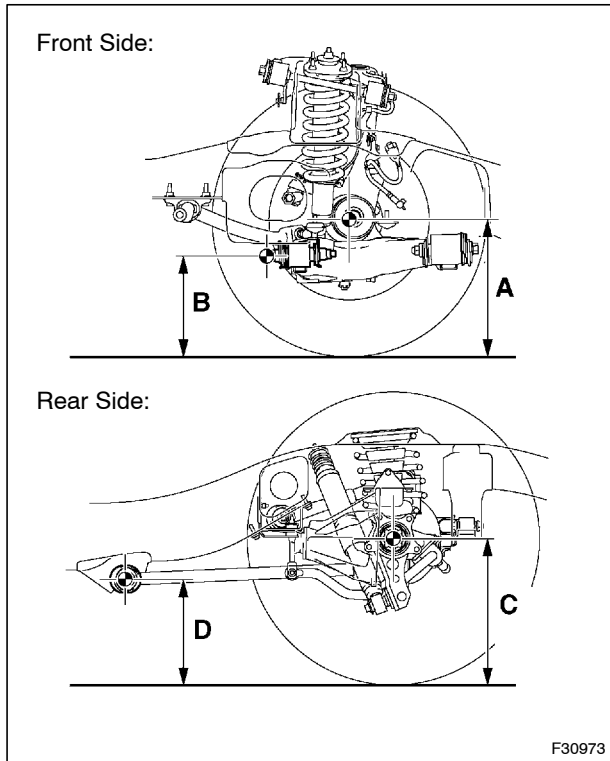(b) FRONT WHEEL ALIGNMENT (Except USA, Canada)

(1) Standard vehicle height (unloaded vehicle):

Measuring points:

A: Ground clearance of the front drive shaft center

B: Ground clearance of the front adjusting cam bolt center

C: Ground clearance of the rear axle shaft center

D: Ground clearance of the rear lower control arm front side center


Vehicle Model	Suspension Package Option	Front A - B	Rear C - D
GRJ200L/R-GMMNK	Option Less	97.6 mm (3.84 in.)	58.5 mm (2.30 in.)
	Spare Tire x 2	95.0 mm (3.74 in.)	54.7 mm (2.15 in.)
	Sub Tank	96.5 mm (3.80 in.)	54.3 mm (2.14 in.)
	Winch	99.1 mm (3.90 in.)	57.3 mm (2.26 in.)
	Spare Tire x 2 + Winch	96.6 mm (3.80 in.)	53.7 mm (2.11 in.)
	Sub Tank + Winch	98.0 mm (3.86 in.)	53.1 mm (2.09 in.)
	Spare Tire x 2 + Sub Tank	92.6 mm (3.65 in.)	62.3 mm (2.45 in.)
	Winch + Spare Tire x 2 + Sub Tank	94.3 mm (3.71 in.)	61.2 mm (2.41 in.)
	Full Option	96.5 mm (3.80 in.)	59.9 mm (2.36 in.)
GRJ200L/R-GNMNK	Option Less	97.8 mm (3.85 in.)	56.1 mm (2.21 in.)
	Spare Tire x 2	94.5 mm (3.72 in.)	58.4 mm (2.30 in.)
	Sub Tank	96.0 mm (3.78 in.)	58.1 mm (2.29 in.)
	Winch	99.3 mm (3.91 in.)	55.0 mm (2.17 in.)
	Spare Tire x 2 + Winch	96.1 mm (3.78 in.)	57.4 mm (2.26 in.)
	Sub Tank + Winch	97.6 mm (3.84 in.)	56.9 mm (2.24 in.)
	Spare Tire x 2 + Sub Tank	92.8 mm (3.65 in.)	60.1 mm (2.37 in.)
	Full Option	97.6 mm (3.84 in.)	61.3 mm (2.41 in.)
GRJ200L-GPMNK	Option Less	95.9 mm (3.78 in.)	56.0 mm (2.20 in.)
	Spare Tire x 2	92.6 mm (3.65 in.)	58.3 mm (2.30 in.)
	Sub Tank	94.1 mm (3.70 in.)	57.9 mm (2.28 in.)
	Winch	97.5 mm (3.84 in.)	54.8 mm (2.16 in.)
	Spare Tire x 2 + Winch	94.3 mm (3.71 in.)	57.3 mm (2.26 in.)
	Sub Tank + Winch	95.8 mm (3.77 in.)	56.7 mm (2.23 in.)
	Spare Tire x 2 + Sub Tank	90.8 mm (3.57 in.)	59.9 mm (2.36 in.)
	Full Option	96.2 mm (3.79 in.)	61.7 mm (2.43 in.)

Vehicle Model	Suspension Package Option	Front A - B	Rear C - D
UZJ200L-GNAEK	Option Less	98.5 mm (3.88 in.)	65.5 mm (2.58 in.)
	Spare Tire x 2	96.0 mm (3.78 in.)	61.7 mm (2.43 in.)
	Full Option	99.0 mm (3.90 in.)	65.0 mm (2.56 in.)
	w/ KDSS Option Less	95.1 mm (3.74 in.)	66.6 mm (2.62 in.)
	w/ KDSS Spare Tire x 2	92.9 mm (3.66 in.)	59.5 mm (2.34 in.)
	w/ KDSS Full Option	95.6 mm (3.76 in.)	63.2 mm (2.49 in.)
VDJ200L-GMMNZ	Option Less	95.8 mm (3.77 in.)	60.9 mm (2.40 in.)
	Spare Tire x 2	92.8 mm (3.65 in.)	63.1 mm (2.48 in.)
	Sub Tank	94.2 mm (3.71 in.)	62.7 mm (2.47 in.)
	Winch	98.8 mm (3.89 in.)	60.1 mm (2.37 in.)
	Spare Tire x 2 + Winch	96.0 mm (3.78 in.)	62.5 mm (2.46 in.)
	Sub Tank + Winch	97.3 mm (3.83 in.)	61.8 mm (2.43 in.)
	Spare Tire x 2 + Sub Tank	91.2 mm (3.59 in.)	64.6 mm (2.54 in.)
	Full Option	98.4 mm (3.87 in.)	61.9 mm (2.44 in.)
VDJ200L/R-GNMNZ	Option Less	94.4 mm (3.72 in.)	61.2 mm (2.41 in.)
	Spare Tire x 2	91.4 mm (3.60 in.)	63.2 mm (2.49 in.)
	Sub Tank	92.8 mm (3.65 in.)	62.8 mm (2.47 in.)
	Winch	97.4 mm (3.83 in.)	60.5 mm (2.38 in.)
	Spare Tire x 2 + Winch	94.7 mm (3.73 in.)	62.6 mm (2.46 in.)
	Sub Tank + Winch	96.0 mm (3.78 in.)	62.1 mm (2.44 in.)
	Spare Tire x 2 + Sub Tank	90.1 mm (3.55 in.)	62.1 mm (2.44 in.)
	Full Option	97.8 mm (3.85 in.)	59.9 mm (2.36 in.)
VDJ200L/R-GNTEZ	Option Less	99.6 mm (3.92 in.)	64.5 mm (2.54 in.)
	Spare Tire x 2	96.7 mm (3.81 in.)	66.4 mm (2.61 in.)
	Sub Tank	98.0 mm (3.86 in.)	66.0 mm (2.60 in.)
	Spare Tire x 2 + Sub Tank	95.2 mm (3.75 in.)	67.7 mm (2.67 in.)
	Full Option	100.2 mm (3.94 in.)	66.8 mm (2.63 in.)
	w/ KDSS Option Less	99.9 mm (3.93 in.)	56.4 mm (2.22 in.)
	w/ KDSS Spare Tire x 2	96.4 mm (3.80 in.)	64.9 mm (2.56 in.)
	w/ KDSS Sub Tank	97.7 mm (3.85 in.)	64.5 mm (2.54 in.)
	w/ KDSS Spare Tire x 2 + Sub Tank	94.5 mm (3.72 in.)	69.8 mm (2.75 in.)
	w/ KDSS Full Option	98.8 mm (3.89 in.)	67.9 mm (2.67 in.)
VDJ200L/R-GNTNZ	Option Less	99.6 mm (3.92 in.)	64.5 mm (2.54 in.)
	Spare Tire x 2	96.7 mm (3.81 in.)	66.4 mm (2.61 in.)
	Sub Tank	98.0 mm (3.86 in.)	66.0 mm (2.60 in.)
	Winch	100.8 mm (3.97 in.)	63.4 mm (2.50 in.)
	Spare Tire x 2 + Winch	98.0 mm (3.86 in.)	65.4 mm (2.57 in.)
	Sub Tank + Winch	99.3 mm (3.91 in.)	64.8 mm (2.55 in.)
	Spare Tire x 2 + Sub Tank	95.4 mm (3.76 in.)	65.3 mm (2.57 in.)
	Full Option	99.9 mm (3.93 in.)	63.2 mm (2.49 in.)

Vehicle Model	Suspension Package Option	Front A - B	Rear C - D
VDJ200L/R-GPMNZ	Option Less	94.4 mm (3.72 in.)	61.5 mm (2.42 in.)
	Spare Tire x 2	92.0 mm (3.62 in.)	57.7 mm (2.27 in.)
	Sub Tank	93.4 mm (3.68 in.)	57.3 mm (2.26 in.)
	Winch	97.5 mm (3.84 in.)	60.8 mm (2.39 in.)
	Spare Tire x 2 + Winch	95.3 mm (3.75 in.)	57.1 mm (2.25 in.)
	Sub Tank + Winch	96.6 mm (3.80 in.)	56.4 mm (2.22 in.)
	Spare Tire x 2 + Sub Tank	90.4 mm (3.56 in.)	59.4 mm (2.34 in.)
	Full Option	96.8 mm (3.81 in.)	58.6 mm (2.31 in.)
VDJ200R-GMMNZ	Option Less	100.3 mm (3.95 in.)	55.6 mm (2.19 in.)
	Spare Tire x 2	97.3 mm (3.83 in.)	58.1 mm (2.29 in.)
	Sub Tank	98.7 mm (3.89 in.)	57.8 mm (2.28 in.)
	Winch	102.9 mm (4.05 in.)	54.8 mm (2.16 in.)
	Spare Tire x 2 + Winch	100.1 mm (3.94 in.)	57.4 mm (2.26 in.)
	Sub Tank + Winch	101.4 mm (3.99 in.)	56.8 mm (2.24 in.)
	Spare Tire x 2 + Sub Tank	95.4 mm (3.76 in.)	63.0 mm (2.48 in.)
	Full Option	98.6 mm (3.88 in.)	64.2 mm (2.53 in.)
GRJ200L-GNANKV	Option Less	87.9 mm (3.46 in.)	81.1 mm (3.19 in.)
	Spare Tire x 2	84.8 mm (3.34 in.)	81.9 mm (3.22 in.)
	Winch	87.2 mm (3.43 in.)	78.0 mm (3.07 in.)
	Spare Tire x 2 + Winch	84.2 mm (3.31 in.)	78.9 mm (3.11 in.)
	Full Option	88.3 mm (3.48 in.)	84.6 mm (3.33 in.)
GRJ200L-GNMNKV	Option Less	87.9 mm (3.46 in.)	81.1 mm (3.19 in.)
	Spare Tire x 2	84.8 mm (3.34 in.)	81.9 mm (3.22 in.)
	Winch	87.2 mm (3.43 in.)	78.0 mm (3.07 in.)
	Spare Tire x 2 + Winch	84.2 mm (3.31 in.)	78.9 mm (3.11 in.)
	Full Option	88.3 mm (3.48 in.)	85.2 mm (3.35 in.)
GRJ200L-GPANKV	Option Less	88.3 mm (3.48 in.)	78.3 mm (3.08 in.)
	Spare Tire x 2	85.1 mm (3.35 in.)	79.2 mm (3.12 in.)
	Winch	88.7 mm (3.49 in.)	77.0 mm (3.03 in.)
	Spare Tire x 2 + Winch	85.7 mm (3.37 in.)	78.1 mm (3.07 in.)
	Full Option	88.6 mm (3.49 in.)	82.0 mm (3.23 in.)
GRJ200L-GPMNKV	Option Less	88.3 mm (3.48 in.)	78.3 mm (3.08 in.)
	Spare Tire x 2	85.1 mm (3.35 in.)	79.2 mm (3.12 in.)
	Winch	88.7 mm (3.49 in.)	77.0 mm (3.03 in.)
	Spare Tire x 2 + Winch	85.7 mm (3.37 in.)	78.1 mm (3.07 in.)
	Full Option	88.6 mm (3.49 in.)	82.0 mm (3.23 in.)
UZJ200L-GNANKV	Option Less	87.5 mm (3.44 in.)	79.8 mm (3.14 in.)
	Spare Tire x 2	84.5 mm (3.33 in.)	80.6 mm (3.17 in.)
	Winch	86.7 mm (3.41 in.)	78.3 mm (3.08 in.)
	Spare Tire x 2 + Winch	83.8 mm (3.30 in.)	79.2 mm (3.12 in.)
	Full Option	85.2 mm (3.35 in.)	83.4 mm (3.28 in.)
UZJ200L-GNAEKV	w/ KDSS Option Less	89.8 mm (3.54 in.)	81.5 mm (3.21 in.)
	w/ KDSS Spare Tire x 2	86.8 mm (3.42 in.)	82.3 mm (3.24 in.)
	w/ KDSS Full Option	91.3 mm (3.59 in.)	86.9 mm (3.42 in.)

Vehicle Model	Suspension Package Option	Front A - B	Rear C - D
VDJ200L-GNMNZV	Option Less	90.8 mm (3.57 in.)	82.6 mm (3.25 in.)
	Spare Tire x 2	88.0 mm (3.46 in.)	83.4 mm (3.28 in.)
	Winch	93.6 mm (3.69 in.)	81.9 mm (3.22 in.)
	Full Option	94.0 mm (3.70 in.)	82.2 mm (3.24 in.)
VDJ200L-GPMNZV	Option Less	91.2 mm (3.59 in.)	79.8 mm (3.14 in.)
	Spare Tire x 2	88.3 mm (3.48 in.)	80.8 mm (3.18 in.)
	Full Option	91.0 mm (3.58 in.)	80.3 mm (3.16 in.)
VDJ200L-GNTNZV	Option Less	85.3 mm (3.36 in.)	81.3 mm (3.20 in.)
	Spare Tire x 2	82.5 mm (3.25 in.)	82.2 mm (3.24 in.)
	Full Option	95.3 mm (3.75 in.)	82.6 mm (3.25 in.)
UZJ200R-GNAEKQ	w/ KDSS Option Less	88.3 mm (3.48 in.)	62.9 mm (2.48 in.)
	w/ KDSS Full Option	90.5 mm (3.56 in.)	67.3 mm (2.65 in.)
UZJ200R-GNANKQ	Option Less	84.9 mm (3.34 in.)	56.9 mm (2.24 in.)
	Full Option	86.5 mm (3.41 in.)	59.0 mm (2.32 in.)
	w/ KDSS Option Less	90.1 mm (3.55 in.)	56.4 mm (2.22 in.)
	w/ KDSS Full Option	90.1 mm (3.55 in.)	58.1 mm (2.29 in.)
VDJ200R-GNTEZQ	Option Less	88.5 mm (3.48 in.)	56.6 mm (2.23 in.)
	Full Option	86.4 mm (3.40 in.)	62.2 mm (2.45 in.)
	w/ KDSS Option Less	96.2 mm (3.79 in.)	60.7 mm (2.39 in.)
	w/ KDSS Full Option	93.3 mm (3.67 in.)	66.3 mm (2.61 in.)
VDJ200R-GNTNZQ	Option Less	86.1 mm (3.39 in.)	57.0 mm (2.24 in.)
	Full Option	87.7 mm (3.45 in.)	58.2 mm (2.29 in.)
	w/ KDSS Option Less	92.2 mm (3.63 in.)	63.1 mm (2.48 in.)
	w/ KDSS Full Option	93.5 mm (3.68 in.)	64.3 mm (2.53 in.)
UZJ200R-GNAEKQ	w/ KDSS Bull Bar	98.9 mm (3.89 in.)	63.8 mm (2.51 in.)
	w/ KDSS Bull Bar Full Option	101.1 mm (3.98 in.)	68.3 mm (2.69 in.)
UZJ200R-GNANKQ	Bull Bar	95.0 mm (3.74 in.)	57.9 mm (2.28 in.)
	Bull Bar Full Option	96.6 mm (3.80 in.)	60.0 mm (2.36 in.)
	w/ KDSS Bull Bar	100.7 mm (3.96 in.)	57.4 mm (2.56 in.)
	w/ KDSS Bull Bar Full Option	100.7 mm (3.96 in.)	59.1 mm (2.33 in.)
VDJ200R-GNTEZQ	Bull Bar	98.2 mm (3.87 in.)	57.4 mm (2.26 in.)
	Bull Bar Full Option	96.1 mm (3.78 in.)	63.1 mm (2.48 in.)
	w/ KDSS Bull Bar	105.9 mm (4.17 in.)	61.4 mm (2.42 in.)
	w/ KDSS Bull Bar Full Option	103.0 mm (4.06 in.)	66.9 mm (2.63 in.)

Vehicle Model	Suspension Package Option	Front A - B	Rear C - D
VDJ200R-GNTNZQ	Bull Bar	95.8 mm (3.77 in.)	57.8 mm (2.28 in.)
	Bull Bar Full Option	97.4 mm (3.83 in.)	59.0 mm (2.32 in.)
	w/ KDSS Bull Bar	101.9 mm (4.01 in.)	63.7 mm (2.51 in.)
	w/ KDSS Bull Bar Full Option	103.2 mm (4.06 in.)	64.9 mm (2.56 in.)
UZJ200L-GMAEKW	w/ KDSS Option Less	93.7 mm (3.69 in.)	57.5 mm (2.26 in.)
	w/ KDSS Full Option	97.2 mm (3.83 in.)	63.6 mm (2.50 in.)
	Active Height Control STD	101.4 mm (3.99 in.)	93.8 mm (3.69 in.)
	Active Height Control Low	162.9 mm (6.41 in.)	139.0 mm (5.47 in.)
	Active Height Control High	52.2 mm (2.06 in.)	36.3 mm (1.43 in.)
UZJ200L/R-GNAEKW	w/ KDSS Option Less	93.9 mm (3.70 in.)	55.1 mm (2.17 in.)
	w/ KDSS Full Option	97.4 mm (3.83 in.)	61.2 mm (2.41 in.)
	Active Height Control STD	101.4 mm (3.99 in.)	93.6 mm (3.69 in.)
	Active Height Control Low	162.9 mm (6.41 in.)	138.8 mm (5.46 in.)
	Active Height Control High	52.1 mm (2.05 in.)	36.1 mm (1.42 in.)
VDJ200L-GMTEZW	w/ KDSS Option Less	97.6 mm (3.84 in.)	57.0 mm (2.24 in.)
	w/ KDSS Full Option	97.6 mm (3.84 in.)	57.0 mm (2.24 in.)
	Active Height Control STD	101.6 mm (3.99 in.)	94.4 mm (3.72 in.)
	Active Height Control Low	163.1 mm (6.42 in.)	139.6 mm (5.50 in.)
	Active Height Control High	52.4 mm (2.06 in.)	37.0 mm (1.46 in.)
VDJ200L/R-GNTEZW	w/ KDSS Option Less	97.3 mm (3.83 in.)	60.0 mm (2.36 in.)
	w/ KDSS Full Option	97.3 mm (3.83 in.)	60.0 mm (2.36 in.)
	Active Height Control STD	101.6 mm (3.99 in.)	94.3 mm (3.71 in.)
	Active Height Control Low	163.1 mm (6.42 in.)	139.5 mm (5.49 in.)
	Active Height Control High	52.3 mm (2.06 in.)	36.8 mm (1.45 in.)

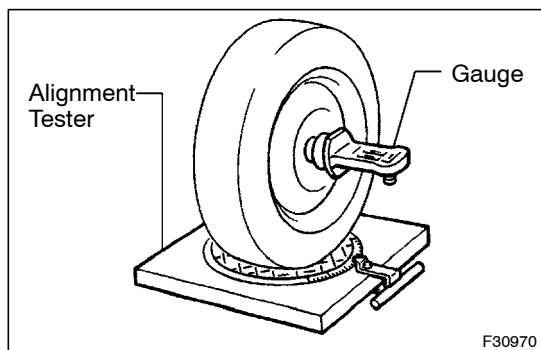

(2) Standard camber inclination (Unloaded Vehicle):

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
GRJ200L/R-GMMNK	Option Less	Camber Left - right error	-0°10' +/-45' (-0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Winch + Spare Tire x 2 + Sub Tank	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
GRJ200L/R-GNMNK	Option Less	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°09' +/-45' (0.15° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPMNK	Option Less	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°16' +/-45' (0.26° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°14' +/-45' (0.23° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°14' +/-45' (0.23° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°17' +/-45' (0.29° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
UZJ200L-GNAEK	Option Less	Camber Left - right error	0°07' +/-45' (0.12° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
VDJ200L-GMMNZ	Option Less	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°08' +/-45' (0.14° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°17' +/-45' (0.28° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°08' +/-45' (0.14° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNMNZ	Option Less	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°17' +/-45' (0.28° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°13' +/-45' (0.21° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°09' +/-45' (0.15° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNTEZ	Option Less	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°05' +/-45' (0.09° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Camber Left - right error	0°07' +/-45' (0.12° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Sub Tank	Camber Left - right error	0°08' +/-45' (0.14° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2 + Sub Tank	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
VDJ200L/R-GNTNZ	Option Less	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°05' +/-45' (0.09° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°08' +/-45' (0.14° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°06' +/-45' (0.10° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GPMNZ	Option Less	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°17' +/-45' (0.28° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°13' +/-45' (0.21° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
VDJ200R-GMMNZ	Option Less	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Camber Left - right error	0°08' +/-45' (0.14° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°04' +/-45' (0.06° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°07' +/-45' (0.11° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Camber Left - right error	0°05' +/-45' (0.09° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°08' +/-45' (0.13° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
GRJ200L-GNANKV	Option Less	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°20' +/-45' (0.33° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°23' +/-45' (0.38° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°17' +/-45' (0.29° +/-0.75°) 45' (0.75°) or less
GRJ200L-GNMNKV	Option Less	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°20' +/-45' (0.33° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°23' +/-45' (0.38° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°17' +/-45' (0.29° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPANKV	Option Less	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°17' +/-45' (0.29° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPMNKV	Option Less	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°17' +/-45' (0.29° +/-0.75°) 45' (0.75°) or less
UZJ200L-GNANKV	Option Less	Camber Left - right error	0°19' +/-45' (0.32° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°22' +/-45' (0.37° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°20' +/-45' (0.34° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Camber Left - right error	0°23' +/-45' (0.39° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
UZJ200L-GNAEKV	w/ KDSS Option Less	Camber Left - right error	0°16' +/-45' (0.27° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2 + Winch	Camber Left - right error	0°19' +/-45' (0.32° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°13' +/-45' (0.22° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
VDJ200L-GNMNZV	Option Less	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Winch	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
VDJ200L-GPMNZV	Option Less	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°18' +/-45' (0.30° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°15' +/-45' (0.25° +/-0.75°) 45' (0.75°) or less
VDJ200L-GNTNZV	Option Less	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Camber Left - right error	0°25' +/-45' (0.41° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°10' +/-45' (0.16° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNAEKQ	w/ KDSS Option Less	Camber Left - right error	0°20' +/-45' (0.33° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°17' +/-45' (0.28° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNANKQ	Option Less	Camber Left - right error	0°25' +/-45' (0.41° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°23' +/-45' (0.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Camber Left - right error	0°19' +/-45' (0.31° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°19' +/-45' (0.31° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTEZQ	Option Less	Camber Left - right error	0°21' +/-45' (0.35° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°23' +/-45' (0.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Camber Left - right error	0°11' +/-45' (0.19° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°14' +/-45' (0.23° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTNZQ	Option Less	Camber Left - right error	0°24' +/-45' (0.40° +/-0.75°) 45' (0.75°) or less
	Full Option	Camber Left - right error	0°22' +/-45' (0.36° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Camber Left - right error	0°16' +/-45' (0.26° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°14' +/-45' (0.23° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNAEKQ	w/ KDSS Bull Bar	Camber Left - right error	0°07' +/-45' (0.12° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Camber Left - right error	0°04' +/-45' (0.06° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNANKQ	Bull Bar	Camber Left - right error	0°13' +/-45' (0.21° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Camber Left - right error	0°06' +/-45' (0.10° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Camber Left - right error	0°05' +/-45' (0.09° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	Caster Inclination
VDJ200R-GNTEZQ	Bull Bar	Camber Left - right error	0°09' +/-45' (0.15° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Camber Left - right error	0°11' +/-45' (0.18° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Camber Left - right error	-0°01' +/-45' (-0.02° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Camber Left - right error	0°02' +/-45' (0.03° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTNZQ	Bull Bar	Camber Left - right error	0°12' +/-45' (0.20° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Camber Left - right error	0°04' +/-45' (0.06° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Camber Left - right error	0°02' +/-45' (0.03° +/-0.75°) 45' (0.75°) or less
UZJ200L-GMAEKW	w/ KDSS Option Less	Camber Left - right error	0°14' +/-45' (0.24° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°09' +/-45' (0.15° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Camber Left - right error	0°00' +/-45' (0.00° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Camber Left - right error	-1°43' +/-45' (-1.71° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Camber Left - right error	1°01' +/-45' (1.01° +/-0.75°) 45' (0.75°) or less
UZJ200L/R-GNAEKW	w/ KDSS Option Less	Camber Left - right error	0°14' +/-45' (0.24° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°09' +/-45' (0.15° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Camber Left - right error	0°00' +/-45' (0.00° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Camber Left - right error	-1°43' +/-45' (-1.71° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Camber Left - right error	1°01' +/-45' (1.01° +/-0.75°) 45' (0.75°) or less
VDJ200L-GMTEZW	w/ KDSS Option Less	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Camber Left - right error	0°00' +/-45' (0.00° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Camber Left - right error	-1°43' +/-45' (-1.71° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Camber Left - right error	1°01' +/-45' (1.01° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNTEZW	w/ KDSS Option Less	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Camber Left - right error	0°10' +/-45' (0.17° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Camber Left - right error	0°00' +/-45' (0.00° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Camber Left - right error	-1°43' +/-45' (-1.71° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Camber Left - right error	1°01' +/-45' (1.01° +/-0.75°) 45' (0.75°) or less

(3) Standard caster inclination (unloaded vehicle):

Vehicle Model	Suspension Package Option	Caster Inclination	
GRJ200L/R-GMMNK	Option Less	Caster Left - right error	2°25' +/-45' (2.41° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°20' +/-45' (2.33° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°20' +/-45' (2.33° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°17' +/-45' (2.28° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°15' +/-45' (2.25° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°35' +/-45' (2.59° +/-0.75°) 45' (0.75°) or less
	Winch + Spare Tire x 2 + Sub Tank	Caster Left - right error	2°31' +/-45' (2.51° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°28' +/-45' (2.46° +/-0.75°) 45' (0.75°) or less
GRJ200L/R-GNMNK	Option Less	Caster Left - right error	2°22' +/-45' (2.37° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°28' +/-45' (2.47° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°27' +/-45' (2.45° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°24' +/-45' (2.40° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°22' +/-45' (2.37° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°33' +/-45' (2.55° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°32' +/-45' (2.53° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPMNK	Option Less	Caster Left - right error	2°20' +/-45' (2.34° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°26' +/-45' (2.44° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°16' +/-45' (2.26° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°22' +/-45' (2.37° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°31' +/-45' (2.52° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°31' +/-45' (2.52° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
UZJ200L-GNAEK	Option Less	Caster Left - right error	2°38' +/-45' (2.64° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°35' +/-45' (2.58° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°41' +/-45' (2.68° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Caster Left - right error	2°40' +/-45' (2.67° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2	Caster Left - right error	2°31' +/-45' (2.52° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°38' +/-45' (2.63° +/-0.75°) 45' (0.75°) or less
VDJ200L-GMMNZ	Option Less	Caster Left - right error	2°23' +/-45' (2.39° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°29' +/-45' (2.49° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°28' +/-45' (2.47° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°20' +/-45' (2.33° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°24' +/-45' (2.40° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°34' +/-45' (2.57° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°25' +/-45' (2.41° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNMNZ	Option Less	Caster Left - right error	2°26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°31' +/-45' (2.52° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°30' +/-45' (2.50° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°22' +/-45' (2.36° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°28' +/-45' (2.46° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°26' +/-45' (2.44° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°31' +/-45' (2.52° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
VDJ200L/R-GNTEZ	Option Less	Caster Left - right error	2°31' +/-45' (2.51° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°36' +/-45' (2.60° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°35' +/-45' (2.58° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°40' +/-45' (2.67° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°37' +/-45' (2.61° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Caster Left - right error	2°17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2	Caster Left - right error	2°34' +/-45' (2.56° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Sub Tank	Caster Left - right error	2°32' +/-45' (2.54° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2 + Sub Tank	Caster Left - right error	2°43' +/-45' (2.72° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°38' +/-45' (2.64° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNTNZ	Option Less	Caster Left - right error	2°31' +/-45' (2.51° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°36' +/-45' (2.60° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°35' +/-45' (2.58° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°32' +/-45' (2.53° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°30' +/-45' (2.50° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°37' +/-45' (2.61° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°29' +/-45' (2.48° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GPMNZ	Option Less	Caster Left - right error	2°25' +/-45' (2.42° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°22' +/-45' (2.36° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°20' +/-45' (2.34° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°16' +/-45' (2.27° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°26' +/-45' (2.44° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
VDJ200R-GMMNZ	Option Less	Caster Left - right error	2°14' +/-45' (2.24° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	2°21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	Sub Tank	Caster Left - right error	2°20' +/-45' (2.33° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°10' +/-45' (2.17° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°17' +/-45' (2.28° +/-0.75°) 45' (0.75°) or less
	Sub Tank + Winch	Caster Left - right error	2°15' +/-45' (2.25° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Sub Tank	Caster Left - right error	2°31' +/-45' (2.51° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°30' +/-45' (2.50° +/-0.75°) 45' (0.75°) or less
GRJ200L-GNANKV	Option Less	Caster Left - right error	3°05' +/-45' (3.08° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°08' +/-45' (3.14° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°56' +/-45' (2.94° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	3°01' +/-45' (3.01° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°10' +/-45' (3.17° +/-0.75°) 45' (0.75°) or less
GRJ200L-GNMNKV	Option Less	Caster Left - right error	3°05' +/-45' (3.08° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°08' +/-45' (3.14° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°56' +/-45' (2.94° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	3°01' +/-45' (3.01° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°11' +/-45' (3.19° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPANKV	Option Less	Caster Left - right error	2°59' +/-45' (2.99° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°03' +/-45' (3.05° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°55' +/-45' (2.91° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°59' +/-45' (2.98° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°05' +/-45' (3.09° +/-0.75°) 45' (0.75°) or less
GRJ200L-GPMNKV	Option Less	Caster Left - right error	2°59' +/-45' (2.99° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°03' +/-45' (3.05° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°55' +/-45' (2.91° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	2°59' +/-45' (2.98° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°05' +/-45' (3.09° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
UZJ200L-GNANKV	Option Less	Caster Left - right error	3°01' +/-45' (3.02° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°05' +/-45' (3.08° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°56' +/-45' (2.94° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2 + Winch	Caster Left - right error	3°00' +/-45' (3.00° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°08' +/-45' (3.13° +/-0.75°) 45' (0.75°) or less
UZJ200L-GNAEKV	w/ KDSS Option Less	Caster Left - right error	3°05' +/-45' (3.08° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Spare Tire x 2	Caster Left - right error	3°08' +/-45' (3.14° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	3°16' +/-45' (3.26° +/-0.75°) 45' (0.75°) or less
VDJ200L-GNMNZV	Option Less	Caster Left - right error	3°02' +/-45' (3.03° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°05' +/-45' (3.09° +/-0.75°) 45' (0.75°) or less
	Winch	Caster Left - right error	2°58' +/-45' (2.96° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°00' +/-45' (3.00° +/-0.75°) 45' (0.75°) or less
VDJ200L-GPMNZV	Option Less	Caster Left - right error	2°56' +/-45' (2.94° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°01' +/-45' (3.01° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°59' +/-45' (2.99° +/-0.75°) 45' (0.75°) or less
VDJ200L-GNTNZV	Option Less	Caster Left - right error	2°59' +/-45' (2.99° +/-0.75°) 45' (0.75°) or less
	Spare Tire x 2	Caster Left - right error	3°03' +/-45' (3.05° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	3°00' +/-45' (3.00° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNAEKQ	w/ KDSS Option Less	Caster Left - right error	2°34' +/-45' (2.56° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°41' +/-45' (2.69° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNANKQ	Option Less	Caster Left - right error	2°23' +/-45' (2.39° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°27' +/-45' (2.45° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Caster Left - right error	2°23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTEZQ	Option Less	Caster Left - right error	2°19' +/-45' (2.31° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2°30' +/-45' (2.50° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Caster Left - right error	2°23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°34' +/-45' (2.57° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
VDJ200R-GNTNZQ	Option Less	Caster Left - right error	2° 19' +/-45' (2.32° +/-0.75°) 45' (0.75°) or less
	Full Option	Caster Left - right error	2° 21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Option Less	Caster Left - right error	2° 29' +/-45' (2.48° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2° 31' +/-45' (2.51° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNAEKQ	w/ KDSS Bull Bar	Caster Left - right error	2° 32' +/-45' (2.54° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Caster Left - right error	2° 40' +/-45' (2.67° +/-0.75°) 45' (0.75°) or less
UZJ200R-GNANKQ	Bull Bar	Caster Left - right error	2° 22' +/-45' (2.37° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Caster Left - right error	2° 26' +/-45' (2.43° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Caster Left - right error	2° 21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Caster Left - right error	2° 25' +/-45' (2.41° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTEZQ	Bull Bar	Caster Left - right error	2° 17' +/-45' (2.28° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Caster Left - right error	2° 28' +/-45' (2.47° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Caster Left - right error	2° 21' +/-45' (2.35° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Caster Left - right error	2° 32' +/-45' (2.54° +/-0.75°) 45' (0.75°) or less
VDJ200R-GNTNZQ	Bull Bar	Caster Left - right error	2° 17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	Bull Bar Full Option	Caster Left - right error	2° 19' +/-45' (2.32° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar	Caster Left - right error	2° 27' +/-45' (2.45° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Bull Bar Full Option	Caster Left - right error	2° 29' +/-45' (2.48° +/-0.75°) 45' (0.75°) or less
UZJ200L-GMAEKW	w/ KDSS Option Less	Caster Left - right error	2° 23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2° 33' +/-45' (2.55° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Caster Left - right error	3° 22' +/-45' (3.36° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Caster Left - right error	4° 28' +/-45' (4.46° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Caster Left - right error	1° 46' +/-45' (1.77° +/-0.75°) 45' (0.75°) or less

Vehicle Model	Suspension Package Option	Caster Inclination	
UZJ200L/R-GNAEKW	w/ KDSS Option Less	Caster Left - right error	2°20' +/-45' (2.33° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°30' +/-45' (2.50° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Caster Left - right error	3°23' +/-45' (3.38° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Caster Left - right error	4°28' +/-45' (4.47° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Caster Left - right error	1°47' +/-45' (1.79° +/-0.75°) 45' (0.75°) or less
VDJ200L-GMTEZW	w/ KDSS Option Less	Caster Left - right error	2°17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°17' +/-45' (2.29° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Caster Left - right error	3°19' +/-45' (3.31° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Caster Left - right error	4°25' +/-45' (4.41° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Caster Left - right error	1°44' +/-45' (1.73° +/-0.75°) 45' (0.75°) or less
VDJ200L/R-GNTEZW	w/ KDSS Option Less	Caster Left - right error	2°23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less
	w/ KDSS Full Option	Caster Left - right error	2°23' +/-45' (2.38° +/-0.75°) 45' (0.75°) or less
	Active Height Control STD	Caster Left - right error	3°19' +/-45' (3.32° +/-0.75°) 45' (0.75°) or less
	Active Height Control Low	Caster Left - right error	4°25' +/-45' (4.42° +/-0.75°) 45' (0.75°) or less
	Active Height Control High	Caster Left - right error	1°44' +/-45' (1.74° +/-0.75°) 45' (0.75°) or less

(4) Standard steering axis inclination (unloaded vehicle):

HINT:


The steering axis inclination is a reference value.

Vehicle Model	Suspension Package Option	Steering Axis Inclination (Reference)	
GRJ200L/R-GMMNK	Option Less	Steering Axis	12°50' (12.84°)
	Spare Tire x 2	Steering Axis	12°46' (12.77°)
	Sub Tank	Steering Axis	12°48' (12.80°)
	Winch	Steering Axis	12°52' (12.86°)
	Spare Tire x 2 + Winch	Steering Axis	12°48' (12.80°)
	Sub Tank + Winch	Steering Axis	12°50' (12.83°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°44' (12.74°)
	Winch + Spare Tire x 2 + Sub Tank	Steering Axis	12°46' (12.77°)
GRJ200L/R-GNMNK	Full Option	Steering Axis	12°49' (12.81°)
	Option Less	Steering Axis	12°50' (12.84°)
	Spare Tire x 2	Steering Axis	12°46' (12.77°)
	Sub Tank	Steering Axis	12°48' (12.80°)
	Winch	Steering Axis	12°52' (12.86°)
	Spare Tire x 2 + Winch	Steering Axis	12°48' (12.80°)
	Sub Tank + Winch	Steering Axis	12°50' (12.83°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°44' (12.74°)
GRJ200L-GPMNK	Full Option	Steering Axis	12°50' (12.84°)
	Option Less	Steering Axis	12°47' (12.79°)
	Spare Tire x 2	Steering Axis	12°44' (12.73°)
	Sub Tank	Steering Axis	12°46' (12.76°)
	Winch	Steering Axis	12°49' (12.82°)
	Spare Tire x 2 + Winch	Steering Axis	12°46' (12.76°)
	Sub Tank + Winch	Steering Axis	12°47' (12.79°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°42' (12.70°)
UZJ200L-GNAEK	Full Option	Steering Axis	12°49' (12.81°)
	Option Less	Steering Axis	12°53' (12.88°)
	Spare Tire x 2	Steering Axis	12°49' (12.81°)
	Full Option	Steering Axis	12°53' (12.89°)
	w/ KDSS Option Less	Steering Axis	12°48' (12.80°)
	w/ KDSS Spare Tire x 2	Steering Axis	12°44' (12.74°)
VDJ200L-GMMNZ	w/ KDSS Full Option	Steering Axis	12°49' (12.81°)
	Option Less	Steering Axis	12°47' (12.79°)
	Spare Tire x 2	Steering Axis	12°44' (12.74°)
	Sub Tank	Steering Axis	12°46' (12.77°)
	Winch	Steering Axis	12°51' (12.85°)
	Spare Tire x 2 + Winch	Steering Axis	12°48' (12.80°)
	Sub Tank + Winch	Steering Axis	12°50' (12.83°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°43' (12.71°)
VDJ200L/R-GNMNZ	Full Option	Steering Axis	12°51' (12.85°)
	Option Less	Steering Axis	12°46' (12.77°)
	Spare Tire x 2	Steering Axis	12°43' (12.71°)
	Sub Tank	Steering Axis	12°44' (12.74°)
	Winch	Steering Axis	12°50' (12.83°)
	Spare Tire x 2 + Winch	Steering Axis	12°47' (12.78°)
	Sub Tank + Winch	Steering Axis	12°48' (12.80°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°41' (12.68°)
	Full Option	Steering Axis	12°50' (12.84°)

Vehicle Model	Suspension Package Option	Steering Axis Inclination (Reference)	
VDJ200L/R-GNTEZ	Option Less	Steering Axis	12°53' (12.89°)
	Spare Tire x 2	Steering Axis	12°50' (12.83°)
	Sub Tank	Steering Axis	12°52' (12.86°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°48' (12.80°)
	Full Option	Steering Axis	12°55' (12.91°)
	w/ KDSS Option Less	Steering Axis	12°53' (12.88°)
	w/ KDSS Spare Tire x 2	Steering Axis	12°49' (12.82°)
	w/ KDSS Sub Tank	Steering Axis	12°51' (12.85°)
	w/ KDSS Spare Tire x 2 + Sub Tank	Steering Axis	12°47' (12.79°)
	w/ KDSS Full Option	Steering Axis	12°53' (12.88°)
VDJ200L/R-GNTNZ	Option Less	Steering Axis	12°53' (12.89°)
	Spare Tire x 2	Steering Axis	12°50' (12.83°)
	Sub Tank	Steering Axis	12°52' (12.86°)
	Winch	Steering Axis	12°55' (12.91°)
	Spare Tire x 2 + Winch	Steering Axis	12°51' (12.85°)
	Sub Tank + Winch	Steering Axis	12°53' (12.88°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°48' (12.80°)
	Full Option	Steering Axis	12°53' (12.89°)
VDJ200L/R-GPMNZ	Option Less	Steering Axis	12°46' (12.77°)
	Spare Tire x 2	Steering Axis	12°43' (12.71°)
	Sub Tank	Steering Axis	12°44' (12.74°)
	Winch	Steering Axis	12°50' (12.83°)
	Spare Tire x 2 + Winch	Steering Axis	12°47' (12.78°)
	Sub Tank + Winch	Steering Axis	12°48' (12.80°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°41' (12.68°)
	Full Option	Steering Axis	12°49' (12.81°)
VDJ200R-GMMNZ	Option Less	Steering Axis	12°53' (12.88°)
	Spare Tire x 2	Steering Axis	12°49' (12.82°)
	Sub Tank	Steering Axis	12°51' (12.85°)
	Winch	Steering Axis	12°56' (12.93°)
	Spare Tire x 2 + Winch	Steering Axis	12°53' (12.88°)
	Sub Tank + Winch	Steering Axis	12°55' (12.91°)
	Spare Tire x 2 + Sub Tank	Steering Axis	12°47' (12.79°)
	Full Option	Steering Axis	12°52' (12.86°)
GRJ200L-GNANKV	Option Less	Steering Axis	12°41' (12.68°)
	Spare Tire x 2	Steering Axis	12°37' (12.62°)
	Winch	Steering Axis	12°40' (12.66°)
	Spare Tire x 2 + Winch	Steering Axis	12°36' (12.60°)
	Full Option	Steering Axis	12°42' (12.70°)
GRJ200L-GNMNKV	Option Less	Steering Axis	12°41' (12.68°)
	Spare Tire x 2	Steering Axis	12°37' (12.62°)
	Winch	Steering Axis	12°40' (12.66°)
	Spare Tire x 2 + Winch	Steering Axis	12°36' (12.60°)
	Full Option	Steering Axis	12°42' (12.70°)
GRJ200L-GPANKV	Option Less	Steering Axis	12°41' (12.68°)
	Spare Tire x 2	Steering Axis	12°37' (12.62°)
	Winch	Steering Axis	12°41' (12.68°)
	Spare Tire x 2 + Winch	Steering Axis	12°38' (12.63°)
	Full Option	Steering Axis	12°42' (12.70°)


Vehicle Model	Suspension Package Option	Steering Axis Inclination (Reference)	
GRJ200L-GPMNKV	Option Less	Steering Axis	12°41' (12.68°)
	Spare Tire x 2	Steering Axis	12°37' (12.62°)
	Winch	Steering Axis	12°41' (12.68°)
	Spare Tire x 2 + Winch	Steering Axis	12°38' (12.63°)
	Full Option	Steering Axis	12°42' (12.70°)
UZJ200L-GNANKV	Option Less	Steering Axis	12°40' (12.67°)
	Spare Tire x 2	Steering Axis	12°37' (12.61°)
	Winch	Steering Axis	12°38' (12.64°)
	Spare Tire x 2 + Winch	Steering Axis	12°35' (12.59°)
	Full Option	Steering Axis	12°38' (12.63°)
UZJ200L-GNAEKV	w/ KDSS Option Less	Steering Axis	12°43' (12.72°)
	w/ KDSS Spare Tire x 2	Steering Axis	12°40' (12.66°)
	w/ KDSS Full Option	Steering Axis	12°46' (12.77°)
VDJ200L-GNMNZV	Option Less	Steering Axis	12°44' (12.74°)
	Spare Tire x 2	Steering Axis	12°41' (12.68°)
	Winch	Steering Axis	12°47' (12.79°)
	Full Option	Steering Axis	12°48' (12.80°)
VDJ200L-GPMNZV	Option Less	Steering Axis	12°44' (12.74°)
	Spare Tire x 2	Steering Axis	12°41' (12.68°)
	Full Option	Steering Axis	12°44' (12.74°)
VDJ200L-GNTNZV	Option Less	Steering Axis	12°37' (12.62°)
	Spare Tire x 2	Steering Axis	12°34' (12.57°)
	Full Option	Steering Axis	12°50' (12.83°)
UZJ200R-GNAEKQ	w/ KDSS Option Less	Steering Axis	12°39' (12.65°)
	w/ KDSS Full Option	Steering Axis	12°42' (12.70°)
UZJ200R-GNANKQ	Option Less	Steering Axis	12°34' (12.57°)
	Full Option	Steering Axis	12°36' (12.60°)
	w/ KDSS Option Less	Steering Axis	12°40' (12.67°)
	w/ KDSS Full Option	Steering Axis	12°41' (12.68°)
VDJ200R-GNTEZQ	Option Less	Steering Axis	12°38' (12.64°)
	Full Option	Steering Axis	12°37' (12.61°)
	w/ KDSS Option Less	Steering Axis	12°48' (12.80°)
	w/ KDSS Full Option	Steering Axis	12°46' (12.76°)
VDJ200R-GNTNZQ	Option Less	Steering Axis	12°35' (12.59°)
	Full Option	Steering Axis	12°37' (12.62°)
	w/ KDSS Option Less	Steering Axis	12°44' (12.73°)
	w/ KDSS Full Option	Steering Axis	12°46' (12.76°)
UZJ200R-GNAEKQ	w/ KDSS Bull Bar	Steering Axis	12°53' (12.88°)
	w/ KDSS Bull Bar Full Option	Steering Axis	12°56' (12.93°)
UZJ200R-GNANKQ	Bull Bar	Steering Axis	12°47' (12.78°)
	Bull Bar Full Option	Steering Axis	12°49' (12.81°)
	w/ KDSS Bull Bar	Steering Axis	12°54' (12.90°)
	w/ KDSS Bull Bar Full Option	Steering Axis	12°54' (12.90°)

Vehicle Model	Suspension Package Option	Steering Axis Inclination (Reference)	
		Steering Axis	
VDJ200R-GNTEZQ	Bull Bar	Steering Axis	12°50' (12.84°)
	Bull Bar Full Option	Steering Axis	12°49' (12.81°)
	w/ KDSS Bull Bar	Steering Axis	13°01' (13.02°)
	w/ KDSS Bull Bar Full Option	Steering Axis	12°58' (12.97°)
VDJ200R-GNTNZQ	Bull Bar	Steering Axis	12°47' (12.79°)
	Bull Bar Full Option	Steering Axis	12°49' (12.82°)
	w/ KDSS Bull Bar	Steering Axis	12°56' (12.93°)
	w/ KDSS Bull Bar Full Option	Steering Axis	12°58' (12.97°)
UZJ200L-GMAEKW	w/ KDSS Option Less	Steering Axis	12°45' (12.75°)
	w/ KDSS Full Option	Steering Axis	12°50' (12.84°)
	Active Height Control STD	Steering Axis	13°00' (13.00°)
	Active Height Control Low	Steering Axis	14°50' (14.83°)
	Active Height Control High	Steering Axis	11°58' (11.96°)
UZJ200L/R-GNAEKW	w/ KDSS Option Less	Steering Axis	12°45' (12.75°)
	w/ KDSS Full Option	Steering Axis	12°50' (12.84°)
	Active Height Control STD	Steering Axis	13°00' (13.00°)
	Active Height Control Low	Steering Axis	14°50' (14.83°)
	Active Height Control High	Steering Axis	11°58' (11.96°)
VDJ200L-GMTEZW	w/ KDSS Option Less	Steering Axis	12°50' (12.83°)
	w/ KDSS Full Option	Steering Axis	12°50' (12.83°)
	Active Height Control STD	Steering Axis	13°00' (13.00°)
	Active Height Control Low	Steering Axis	14°50' (14.83°)
	Active Height Control High	Steering Axis	11°58' (11.96°)
VDJ200L/R-GNTEZW	w/ KDSS Option Less	Steering Axis	12°50' (12.83°)
	w/ KDSS Full Option	Steering Axis	12°50' (12.83°)
	Active Height Control STD	Steering Axis	13°00' (13.00°)
	Active Height Control Low	Steering Axis	14°50' (14.83°)
	Active Height Control High	Steering Axis	11°58' (11.96°)

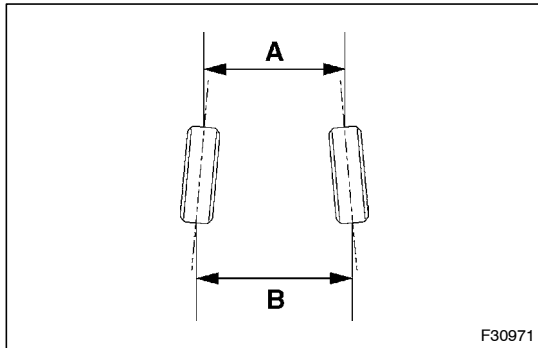

(5) Standard toe-in (unloaded vehicle):

Vehicle Model	Item	Front A + B Rear C - D
w/o Active Height Control	Toe-in (total)	A - B: 0° 13' +/- 45' (0.22° +/- 0.75°) C - D: 3 +/- 2 mm (0.118 +/- 0.0787 in.)
w/ Active Height Control	Toe-in (total)	A - B: 0° 00' +/- 45' (0.00° +/- 0.75°) C - D: 0 +/- 2 mm (0 +/- 0.0787 in.)

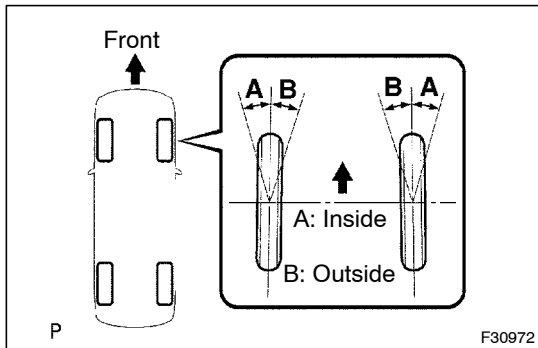

(6) Standard wheel turning angle:

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
GRJ200L/R-GMMNK	Option Less	33° 31' to 36° 31' (33.52° to 36.52°)	32° 14' (32.23°)
	Spare Tire x 2	33° 32' to 36° 32' (33.54° to 36.54°)	32° 19' (32.32°)
	Sub Tank	33° 32' to 36° 32' (33.53° to 36.53°)	32° 16' (32.27°)
	Winch	33° 31' to 36° 31' (33.51° to 36.51°)	32° 12' (32.20°)
	Spare Tire x 2 + Winch	33° 32' to 36° 32' (33.53° to 36.53°)	32° 17' (32.28°)
	Sub Tank + Winch	33° 31' to 36° 31' (33.52° to 36.52°)	32° 14' (32.24°)
	Spare Tire x 2 + Sub Tank	33° 33' to 36° 33' (33.55° to 36.55°)	32° 22' (32.36°)
	Winch + Spare Tire x 2 + Sub Tank	33° 32' to 36° 32' (33.54° to 36.54°)	32° 19' (32.32°)
	Full Option	33° 31' to 36° 31' (33.52° to 36.52°)	32° 16' (32.26°)
GRJ200L/R-GNMNK	Option Less	33° 31' to 36° 31' (33.52° to 36.52°)	32° 14' (32.23°)
	Spare Tire x 2	33° 32' to 36° 32' (33.54° to 36.54°)	32° 19' (32.32°)
	Sub Tank	33° 32' to 36° 32' (33.53° to 36.53°)	32° 16' (32.27°)
	Winch	33° 31' to 36° 31' (33.51° to 36.51°)	32° 12' (32.20°)
	Spare Tire x 2 + Winch	33° 32' to 36° 32' (33.53° to 36.53°)	32° 17' (32.28°)
	Sub Tank + Winch	33° 31' to 36° 31' (33.52° to 36.52°)	32° 14' (32.24°)
	Spare Tire x 2 + Sub Tank	33° 33' to 36° 33' (33.55° to 36.55°)	32° 22' (32.36°)
	Full Option	33° 31' to 36° 31' (33.51° to 36.51°)	32° 13' (32.22°)

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
GRJ200L-GPMNK	Option Less	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	Spare Tire x 2	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.37°)
	Sub Tank	33°32' to 36°32' (33.54° to 36.54°)	32°20' (32.33°)
	Winch	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	Spare Tire x 2 + Winch	33°32' to 36°32' (33.54° to 36.54°)	32°20' (32.33°)
	Sub Tank + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	Spare Tire x 2 + Sub Tank	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.41°)
	Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.26°)
UZJ200L-GNAEK	Option Less	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	Spare Tire x 2	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.26°)
	Full Option	33°30' to 36°30' (33.50° to 36.50°)	32°10' (32.17°)
	w/ KDSS Option Less	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	w/ KDSS Spare Tire x 2	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	w/ KDSS Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.27°)
VDJ200L-GMMNZ	Option Less	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	Spare Tire x 2	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	Sub Tank	33°32' to 36°32' (33.54° to 36.54°)	32°19' (32.32°)
	Winch	33°31' to 36°31' (33.51° to 36.51°)	32°13' (32.21°)
	Spare Tire x 2 + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	Sub Tank + Winch	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
	Spare Tire x 2 + Sub Tank	33°34' to 36°34' (33.56° to 36.56°)	32°24' (32.40°)
	Full Option	33°31' to 36°31' (33.51° to 36.51°)	32°13' (32.21°)
VDJ200L/R-GNMNZ	Option Less	33°32' to 36°32' (33.54° to 36.54°)	32°19' (32.32°)
	Spare Tire x 2	33°34' to 36°34' (33.56° to 36.56°)	32°24' (32.40°)
	Sub Tank	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	Winch	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
	Spare Tire x 2 + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°19' (32.31°)
	Sub Tank + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	Spare Tire x 2 + Sub Tank	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.44°)
	Full Option	33°31' to 36°31' (33.51° to 36.51°)	32°14' (32.23°)

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
VDJ200L/R-GNTEZ	Option Less	33°30' to 36°30' (33.50° to 36.50°)	32°10' (32.17°)
	Spare Tire x 2	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
	Sub Tank	33°31' to 36°31' (33.51° to 36.51°)	32°12' (32.20°)
	Spare Tire x 2 + Sub Tank	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	Full Option	33°29' to 36°29' (33.49° to 36.49°)	32°08' (32.14°)
	w/ KDSS Option Less	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	w/ KDSS Spare Tire x 2	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	w/ KDSS Sub Tank	33°31' to 36°31' (33.51° to 36.51°)	32°13' (32.22°)
	w/ KDSS Spare Tire x 2 + Sub Tank	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	w/ KDSS Full Option	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
VDJ200L/R-GNTNZ	Option Less	33°30' to 36°30' (33.50° to 36.50°)	32°10' (32.17°)
	Spare Tire x 2	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
	Sub Tank	33°31' to 36°31' (33.51° to 36.51°)	32°12' (32.20°)
	Winch	33°29' to 36°29' (33.49° to 36.49°)	32°08' (32.14°)
	Spare Tire x 2 + Winch	33°31' to 36°31' (33.51° to 36.51°)	32°13' (32.21°)
	Sub Tank + Winch	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	Spare Tire x 2 + Sub Tank	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	Full Option	33°30' to 36°30' (33.50° to 36.50°)	32°10' (32.16°)
VDJ200L/R-GPMNZ	Option Less	33°32' to 36°32' (33.54° to 36.54°)	32°19' (32.32°)
	Spare Tire x 2	33°34' to 36°34' (33.56° to 36.56°)	32°24' (32.40°)
	Sub Tank	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	Winch	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
	Spare Tire x 2 + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°19' (32.31°)
	Sub Tank + Winch	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	Spare Tire x 2 + Sub Tank	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.44°)
	Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.26°)

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
VDJ200R-GMMNZ	Option Less	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	Spare Tire x 2	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	Sub Tank	33°31' to 36°31' (33.51° to 36.51°)	32°13' (32.21°)
	Winch	33°29' to 36°29' (33.48° to 36.48°)	32°07' (32.11°)
	Spare Tire x 2 + Winch	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	Sub Tank + Winch	33°29' to 36°29' (33.49° to 36.49°)	32°08' (32.14°)
	Spare Tire x 2 + Sub Tank	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	Full Option	33°31' to 36°31' (33.51° to 36.51°)	32°12' (32.20°)
GRJ200L-GNANKV	Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°26' (32.44°)
	Spare Tire x 2	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	Winch	33°34' to 36°34' (33.57° to 36.57°)	32°28' (32.47°)
	Spare Tire x 2 + Winch	33°35' to 36°35' (33.59° to 36.59°)	32°33' (32.55°)
	Full Option	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.42°)
GRJ200L-GNMNKV	Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°26' (32.44°)
	Spare Tire x 2	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	Winch	33°34' to 36°34' (33.57° to 36.57°)	32°28' (32.47°)
	Spare Tire x 2 + Winch	33°35' to 36°35' (33.59° to 36.59°)	32°33' (32.55°)
	Full Option	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.42°)
GRJ200L-GPANKV	Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°26' (32.44°)
	Spare Tire x 2	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	Winch	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.43°)
	Spare Tire x 2 + Winch	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.51°)
	Full Option	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.42°)
GRJ200L-GPMNKV	Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°26' (32.44°)
	Spare Tire x 2	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	Winch	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.43°)
	Spare Tire x 2 + Winch	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.51°)
	Full Option	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.42°)
UZJ200L-GNANKV	Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°28' (32.46°)
	Spare Tire x 2	33°35' to 36°35' (33.59° to 36.59°)	32°32' (32.54°)
	Winch	33°35' to 36°35' (33.58° to 36.58°)	32°29' (32.49°)
	Spare Tire x 2 + Winch	33°35' to 36°35' (33.59° to 36.59°)	32°34' (32.56°)
	Full Option	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.51°)

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
UZJ200L-GNAEKV	w/ KDSS Option Less	33°33' to 36°33' (33.55° to 36.55°)	32°23' (32.39°)
	w/ KDSS Spare Tire x 2	33°34' to 36°34' (33.57° to 36.57°)	32°28' (32.46°)
	w/ KDSS Full Option	33°32' to 36°32' (33.54° to 36.54°)	32°19' (32.32°)
VDJ200L-GNMNZV	Option Less	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	Spare Tire x 2	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.44°)
	Winch	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.29°)
	Full Option	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
VDJ200L-GPMNZV	Option Less	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
	Spare Tire x 2	33°34' to 36°34' (33.56° to 36.56°)	32°26' (32.44°)
	Full Option	33°33' to 36°33' (33.55° to 36.55°)	32°22' (32.36°)
VDJ200L-GNTNZV	Option Less	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	Spare Tire x 2	33°36' to 36°36' (33.60° to 36.60°)	32°36' (32.59°)
	Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°14' (32.24°)
UZJ200R-GNAEKQ	w/ KDSS Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°29' (32.48°)
	w/ KDSS Full Option	33°34' to 36°34' (33.56° to 36.56°)	32°25' (32.41°)
UZJ200R-GNANKQ	Option Less	33°36' to 36°36' (33.60° to 36.60°)	32°36' (32.59°)
	Full Option	33°36' to 36°36' (33.59° to 36.59°)	32°32' (32.54°)
	w/ KDSS Option Less	33°34' to 36°34' (33.57° to 36.57°)	32°27' (32.45°)
	w/ KDSS Full Option	33°34' to 36°34' (33.57° to 36.57°)	32°26' (32.44°)
VDJ200R-GNTEZQ	Option Less	33°35' to 36°35' (33.58° to 36.58°)	32°30' (32.50°)
	Full Option	33°36' to 36°36' (33.59° to 36.59°)	32°32' (32.54°)
	w/ KDSS Option Less	33°32' to 36°32' (33.53° to 36.53°)	32°17' (32.28°)
	w/ KDSS Full Option	33°32' to 36°32' (33.54° to 36.54°)	32°20' (32.34°)
VDJ200R-GNTNZQ	Option Less	33°36' to 36°36' (33.59° to 36.59°)	32°34' (32.57°)
	Full Option	33°35' to 36°35' (33.58° to 36.58°)	32°31' (32.52°)
	w/ KDSS Option Less	33°33' to 36°33' (33.55° to 36.55°)	32°23' (32.38°)
	w/ KDSS Full Option	33°32' to 36°32' (33.54° to 36.54°)	32°20' (32.34°)
UZJ200R-GNAEKQ	w/ KDSS Bull Bar	33°30' to 36°30' (33.50° to 36.50°)	32°11' (32.18°)
	w/ KDSS Bull Bar Full Option	33°29' to 36°29' (33.48° to 36.48°)	32°07' (32.11°)

Vehicle Model	Suspension Package Option	Inside wheel angle	Outside wheel angle (reference)
UZJ200R-GNANKQ	Bull Bar	33°32' to 36°32' (33.53° to 36.53°)	32°19' (32.31°)
	Bull Bar Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.26°)
	w/ KDSS Bull Bar	33°29' to 36°29' (33.49° to 36.49°)	32°09' (32.15°)
	w/ KDSS Bull Bar Full Option	33°29' to 36°29' (33.49° to 36.49°)	32°09' (32.15°)
VDJ200R-GNTEZQ	Bull Bar	33°31' to 36°31' (33.51° to 36.51°)	32°14' (32.23°)
	Bull Bar Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°16' (32.27°)
	w/ KDSS Bull Bar	33°27' to 36°27' (33.45° to 36.45°)	32°01' (32.01°)
	w/ KDSS Bull Bar Full Option	33°28' to 36°28' (33.47° to 36.47°)	32°04' (32.07°)
VDJ200R-GNTNZQ	Bull Bar	33°32' to 36°32' (33.53° to 36.53°)	32°18' (32.30°)
	Bull Bar Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	w/ KDSS Bull Bar	33°29' to 36°29' (33.48° to 36.48°)	32°07' (32.11°)
	w/ KDSS Bull Bar Full Option	33°28' to 36°28' (33.47° to 36.47°)	32°04' (32.07°)
UZJ200L-GMAEKW	w/ KDSS Option Less	33°32' to 36°32' (33.54° to 36.54°)	32°21' (32.35°)
	w/ KDSS Full Option	33°31' to 36°31' (33.51° to 36.51°)	32°14' (32.23°)
	Active Height Control STD	33°28' to 36°28' (33.46° to 36.46°)	32°02' (32.03°)
	Active Height Control Low	32°43' to 35°43' (32.71° to 35.71°)	30°17' (30.29°)
	Active Height Control High	33°44' to 36°44' (33.74° to 36.74°)	33°37' (33.62°)
UZJ200L/R-GNAEKW	w/ KDSS Option Less	33°32' to 36°32' (33.54° to 36.54°)	32°21' (32.35°)
	w/ KDSS Full Option	33°31' to 36°31' (33.51° to 36.51°)	32°14' (32.23°)
	Active Height Control STD	33°28' to 36°28' (33.46° to 36.46°)	32°02' (32.03°)
	Active Height Control Low	32°43' to 35°43' (32.71° to 35.71°)	30°17' (30.29°)
	Active Height Control High	33°44' to 36°44' (33.74° to 36.74°)	33°37' (33.62°)
VDJ200L-GMTEZW	w/ KDSS Option Less	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	w/ KDSS Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	Active Height Control STD	33°28' to 36°28' (33.46° to 36.46°)	32°02' (32.03°)
	Active Height Control Low	32°43' to 35°43' (32.71° to 35.71°)	30°17' (30.29°)
	Active Height Control High	33°44' to 36°44' (33.74° to 36.74°)	33°37' (33.62°)
VDJ200L/R-GNTEZW	w/ KDSS Option Less	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	w/ KDSS Full Option	33°31' to 36°31' (33.52° to 36.52°)	32°15' (32.25°)
	Active Height Control STD	33°28' to 36°28' (33.46° to 36.46°)	32°02' (32.03°)
	Active Height Control Low	32°43' to 35°43' (32.71° to 35.71°)	30°17' (30.29°)
	Active Height Control High	33°44' to 36°44' (33.74° to 36.74°)	33°37' (33.62°)