

## BODY LOWER BACK PANEL (CUT)



F29242A


### Symbol meaning

REMOVAL      ▲ ▲ : Remove Weld Points      S : Cut and Join Location

INSTALLATION      I : Spot Weld      M I : Plug Weld      B : Butt Weld

F29242B

### REMOVAL-INSTALLATION

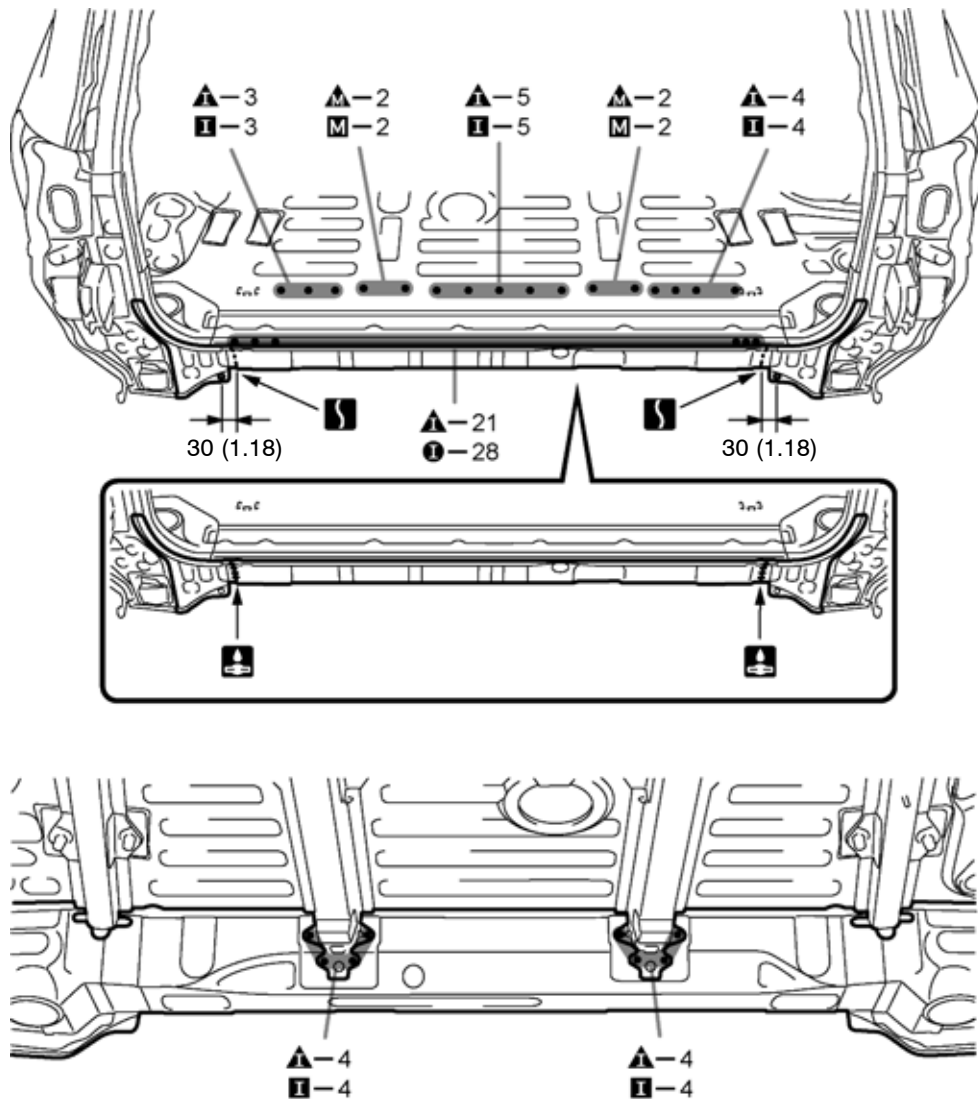

mm (in.)

F29242

### INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- 2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 3 After welding, apply undercoating to the corresponding parts. (See the paint coating)
- 4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.