

REAR FLOOR SIDE MEMBER (ASSY)



F29251A

With the rear floor pan removed.

Symbol meaning

REMOVAL



△ : Remove Weld Points

INSTALLATION

◻ : Plug Weld

F29251B

REMOVAL-INSTALLATION

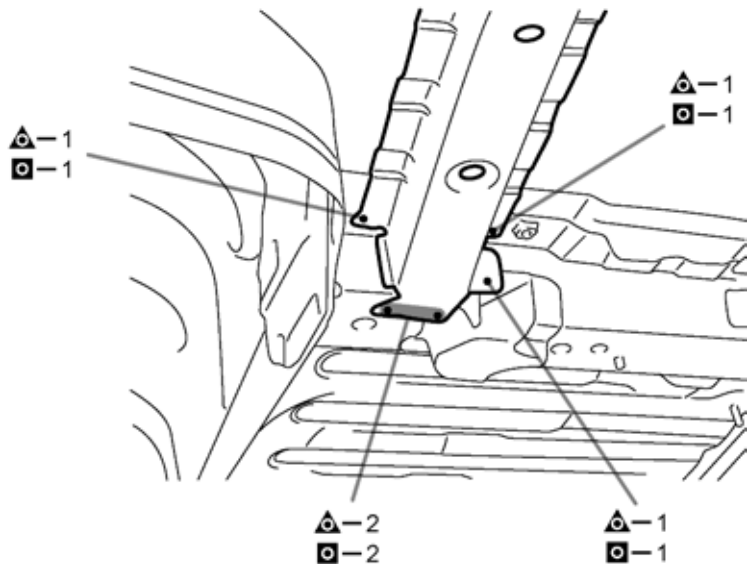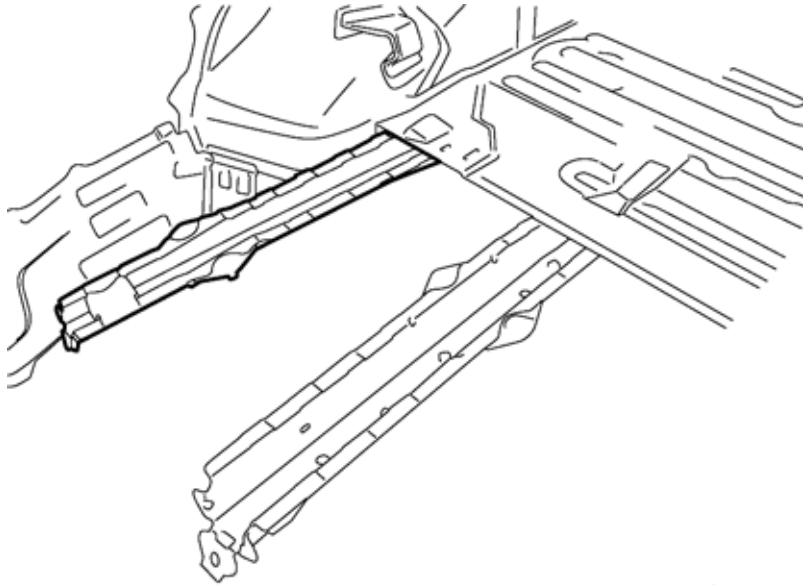

F29251

INSTALLATION POINT

- 1 After welding, apply undercoating to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.