


BODY DIMENSION DRAWINGS

ENGINE COMPARTMENT

(Three - Dimensional Distance)

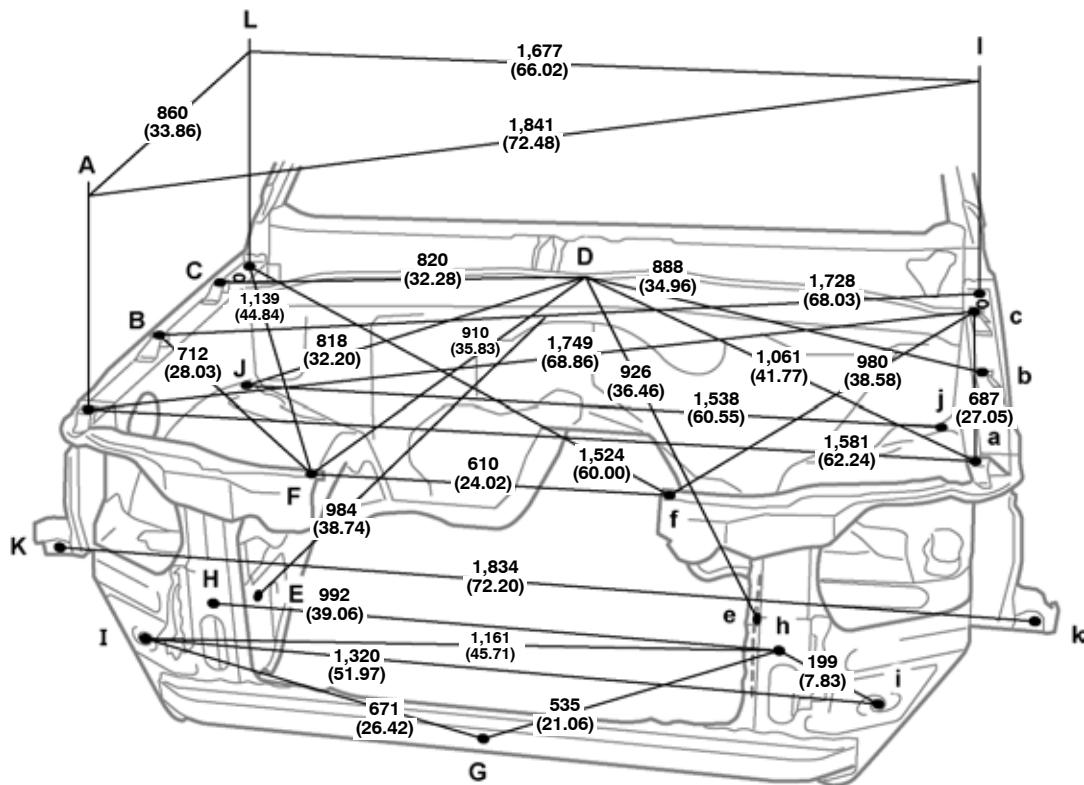

Vehicle Dimensions

B-f or b-F	B-L or b-l	C-f or c-F	B-b	C-c	E-e
1,224 (48.19)	510 (20.08)	1,399 (55.08)	1,625 (63.98)	1,637 (64.45)	918 (36.14)

Height from Imaginary Datum Line

A,a	F,f	L,l
923 (36.34)	887 (34.92)	984 (38.74)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
A, a	Front fender installation nut	M6 (0.24)	G	Hood lock support brace installation nut	M6 (0.24)
B, b	Front fender installation nut	M6 (0.24)	H, h	Radiator support standard hole	ø10 (0.39)
C, c	Front fender installation nut	M6 (0.24)	I, i	Radiator support standard hole	ø10 (0.39)
D	Cowl panel center mark	—	J, j	Front fender apron standard hole	ø15 (0.59)
E, e	Front fender No. 2 side apron standard hole	ø10 (0.39)	K, k	Front fender bracket standard hole	ø10 (0.39)
F, f	Radiator upper support installation nut	M6 (0.24)	L, l	Hood hinge installation nut	M8 (0.31)
			—	—	—

BODY OPENING AREAS (Side View: Front)

(Three - Dimensional Distance)

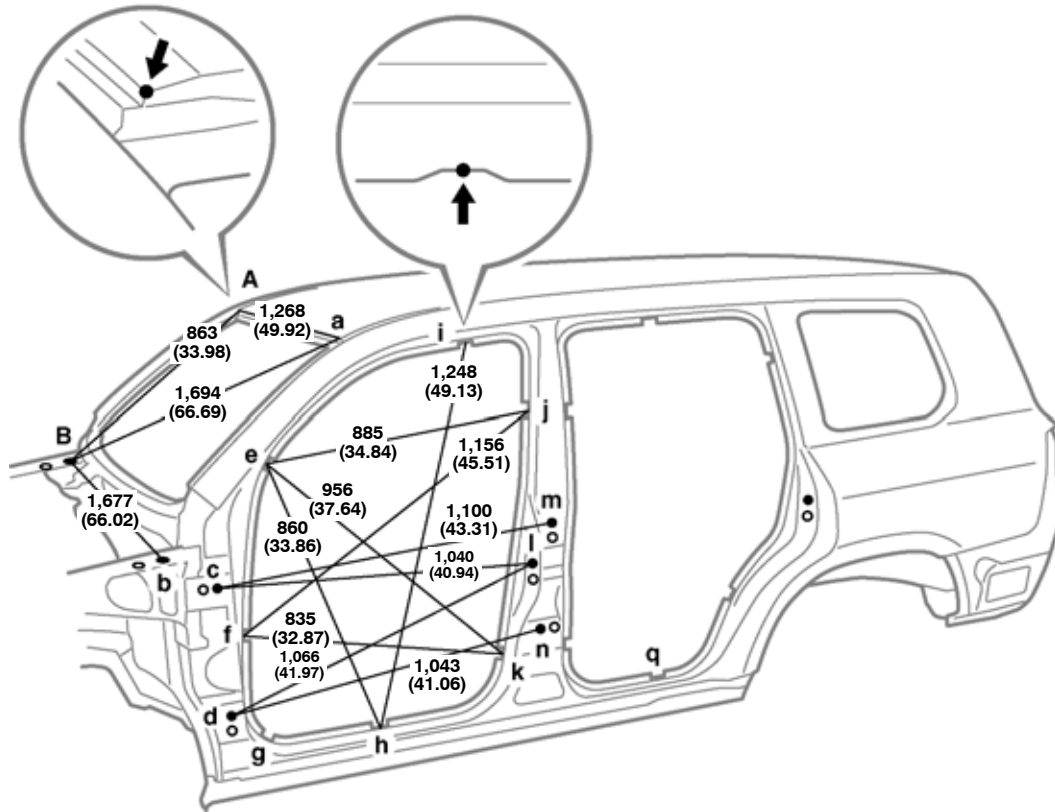

Vehicle Dimensions

E-e	F-f	G-g	H-h	I-I	J-j	K-k	L-I
1,537 (60.51)	1,598 (62.91)	1,661 (65.39)	1,661 (65.39)	1,320 (51.97)	1,468 (57.80)	1,634 (64.33)	1,701 (66.97)

E-f or e-F	E-h or e-H	E-j or e-J	F-j or f-J	F-k or f-K	G-q or g-Q	H-I or h-I	J-k or j-K
1,646 (64.80)	1,815 (71.46)	1,744 (68.66)	1,919 (75.55)	1,819 (71.61)	2,146 (84.49)	1,936 (76.22)	1,729 (68.07)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	H, h	Rocker panel assembly mark	—
A, a	Roof panel corner	—	I, i	Roof side rail assembly mark	—
B, b	Hood hinge installation nut	M8 (0.31)	J, j	Center body pillar assembly mark	—
C, c	Front door hinge installation nut	M8 (0.31)	K, k	Center body pillar assembly mark	—
D, d	Front door hinge installation nut	M8 (0.31)	L, l	Front door lock striker installation nut	M8 (0.31)
E, e	Front body pillar assembly mark	—	M, m	Rear door hinge installation nut	M8 (0.31)
F, f	Front body pillar assembly mark	—	N, n	Rear door hinge installation nut	M8 (0.31)
G, g	Rocker panel assembly mark	—	—	—	—

BODY OPENING AREAS (Side View: Rear)

(Three - Dimensional Distance)

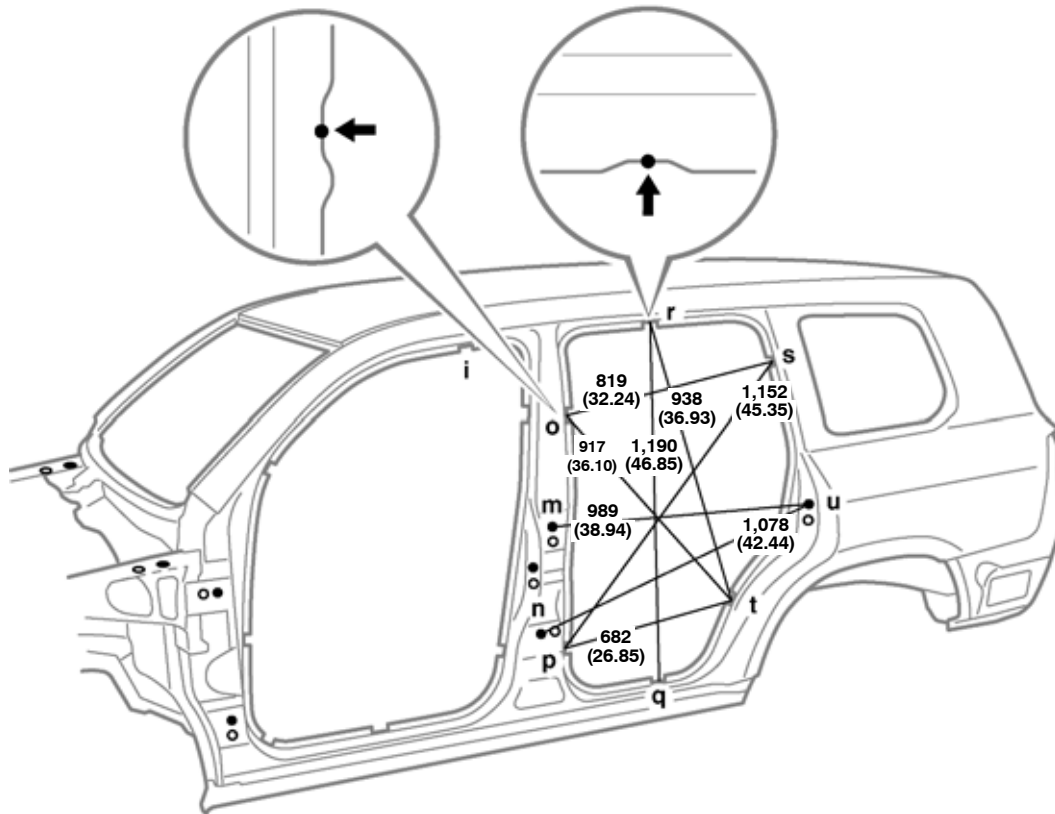

Vehicle Dimensions

O-o	P-p	Q-q	R-r	S-s	T-t	U-u
1,468 (57.80)	1,612 (63.46)	1,661 (65.39)	1,299 (51.14)	1,470 (57.87)	1,659 (65.31)	1,750 (66.57)

I-r or i-R	O-s or o-S	O-t or o-T	P-t or p-T	Q-r or q-R	S-t or s-T
1,480 (58.27)	1,682 (66.22)	1,810 (71.26)	1,772 (69.76)	1,890 (74.41)	1,711 (67.36)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Q, q	Rocker panel assembly mark	—
L, i	Front door lock striker installation nut	M8 (0.31)	R, r	Roof side rail assembly mark	—
M, m	Rear door hinge installation nut	M8 (0.31)	S, s	Quarter panel assembly mark	—
N, n	Rear door hinge installation nut	M8 (0.31)	T, t	Quarter panel assembly mark	—
O, o	Center body pillar assembly mark	—	U, u	Rear door lock striker installation nut	M8 (0.31)
P, p	Center body pillar assembly mark	—	—	—	—

BODY OPENING AREAS (Rear View)

(Three - Dimensional Distance)

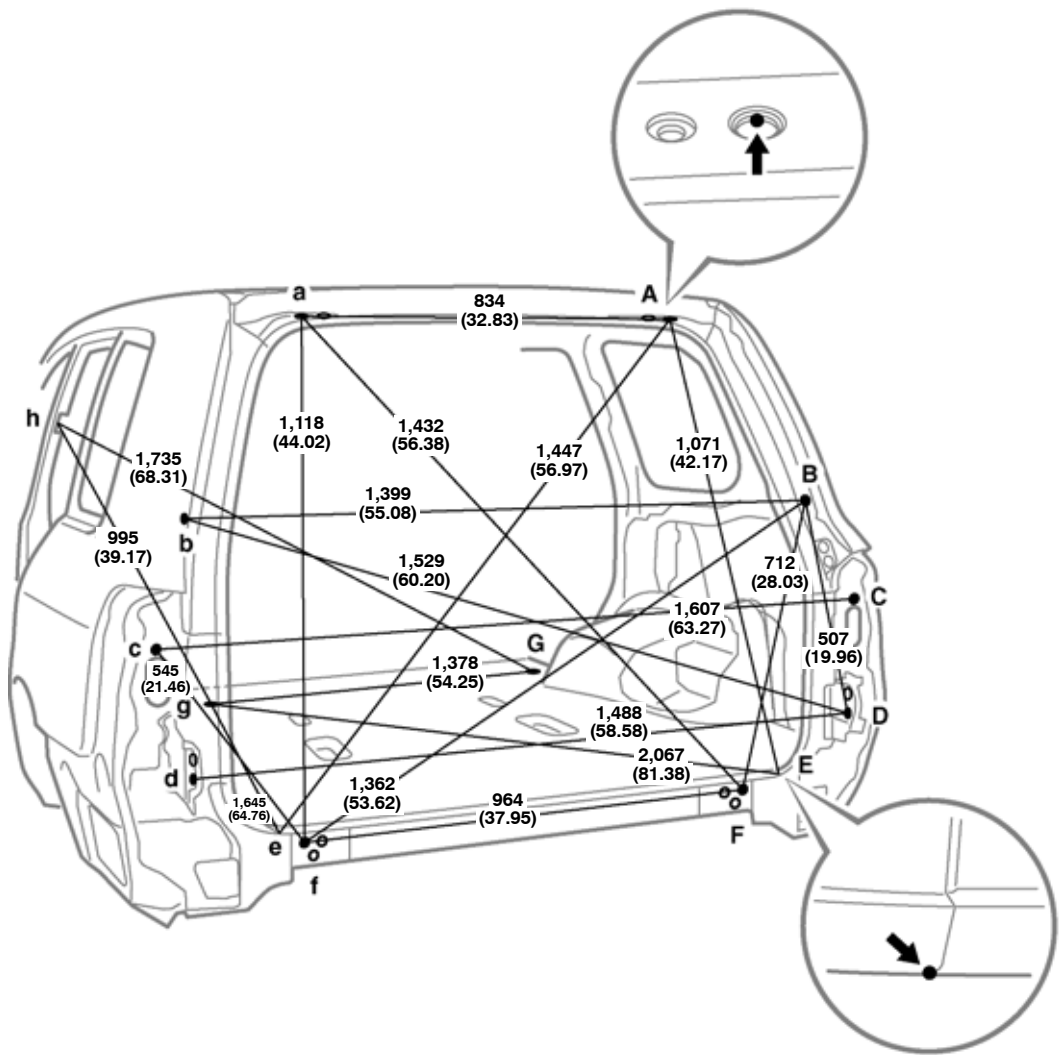

Vehicle Dimensions

C-f or c-F	E-e
1,359 (53.50)	1,136 (44.72)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.			
E, e	Lower back panel No. 1 gusset corner				—
A, a	Back door hinge installation hole	ø13 (0.51)	F, f	Tail gate hinge installation nut	M8 (0.31)
B, b	Back door damper stay installation nut	M8 (0.31)	G, g	Rear floor pan standard hole	ø45 (1.77)
C, c	Quarter panel extension standard hole	ø10 (0.39)	H, h	Center body pillar assembly mark	—
D, d	Tail gate lock striker installation nut	M8 (0.31)	—	—	—

FRAME DIMENSION - Upper Face

(Three - Dimensional Distance)

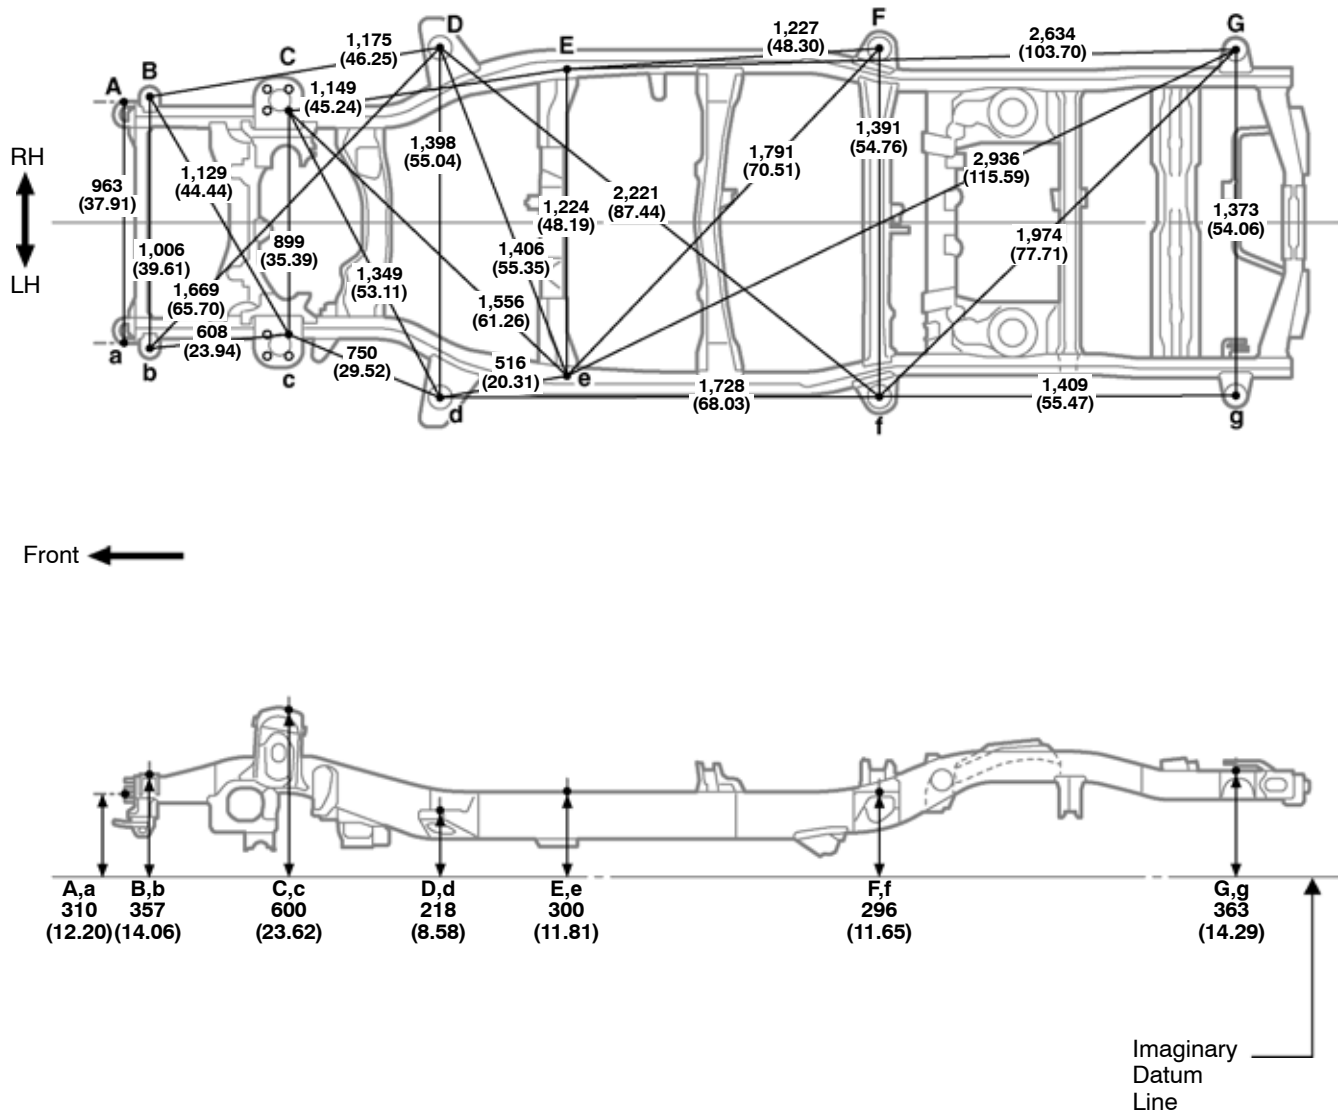


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face

(Two - Dimensional Distance)

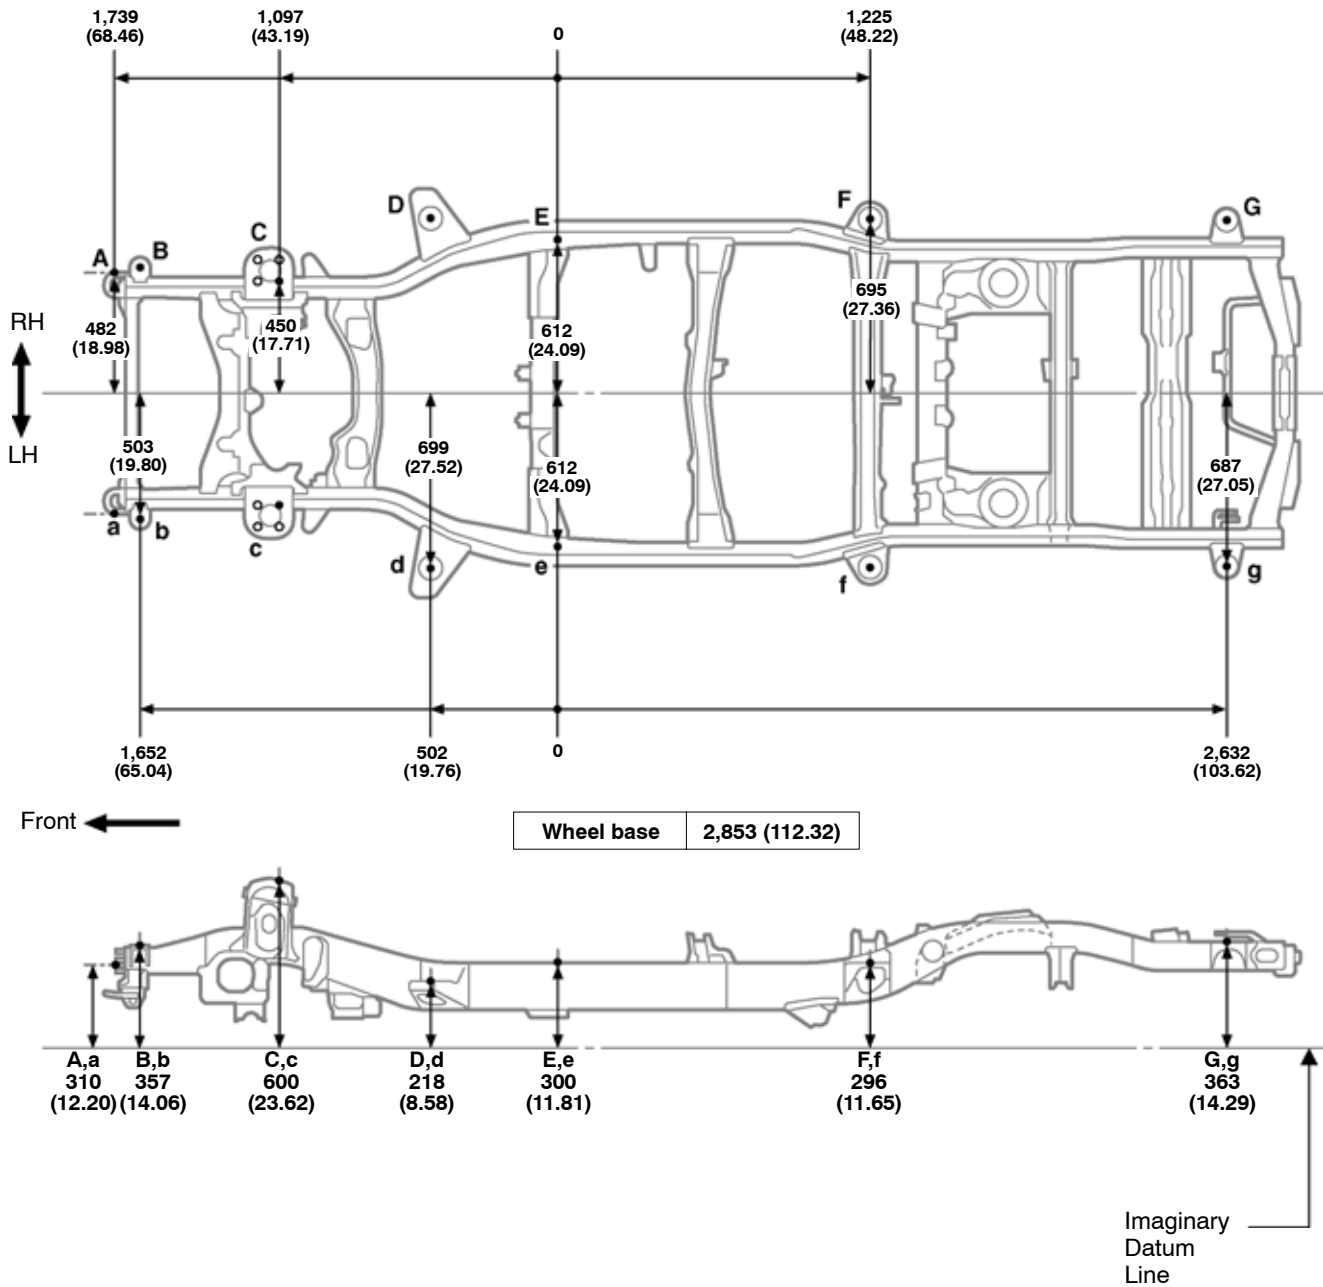


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face With Kinetic Dynamic Suspension System

(Three - Dimensional Distance)

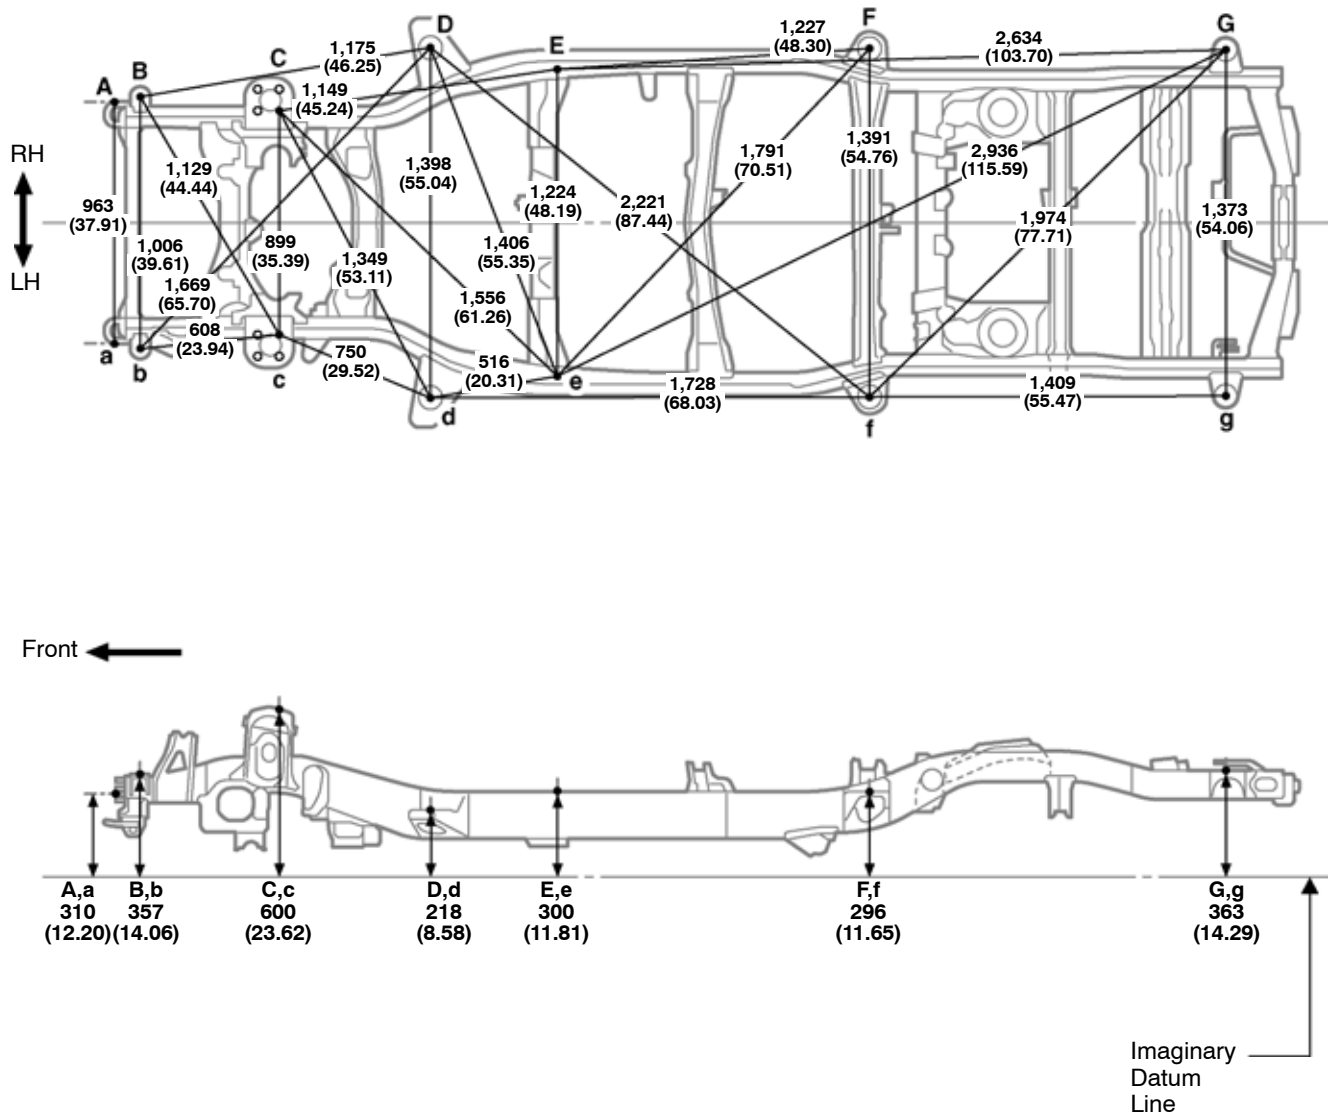

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face

With Kinetic Dynamic Suspension system

(Two - Dimensional Distance)

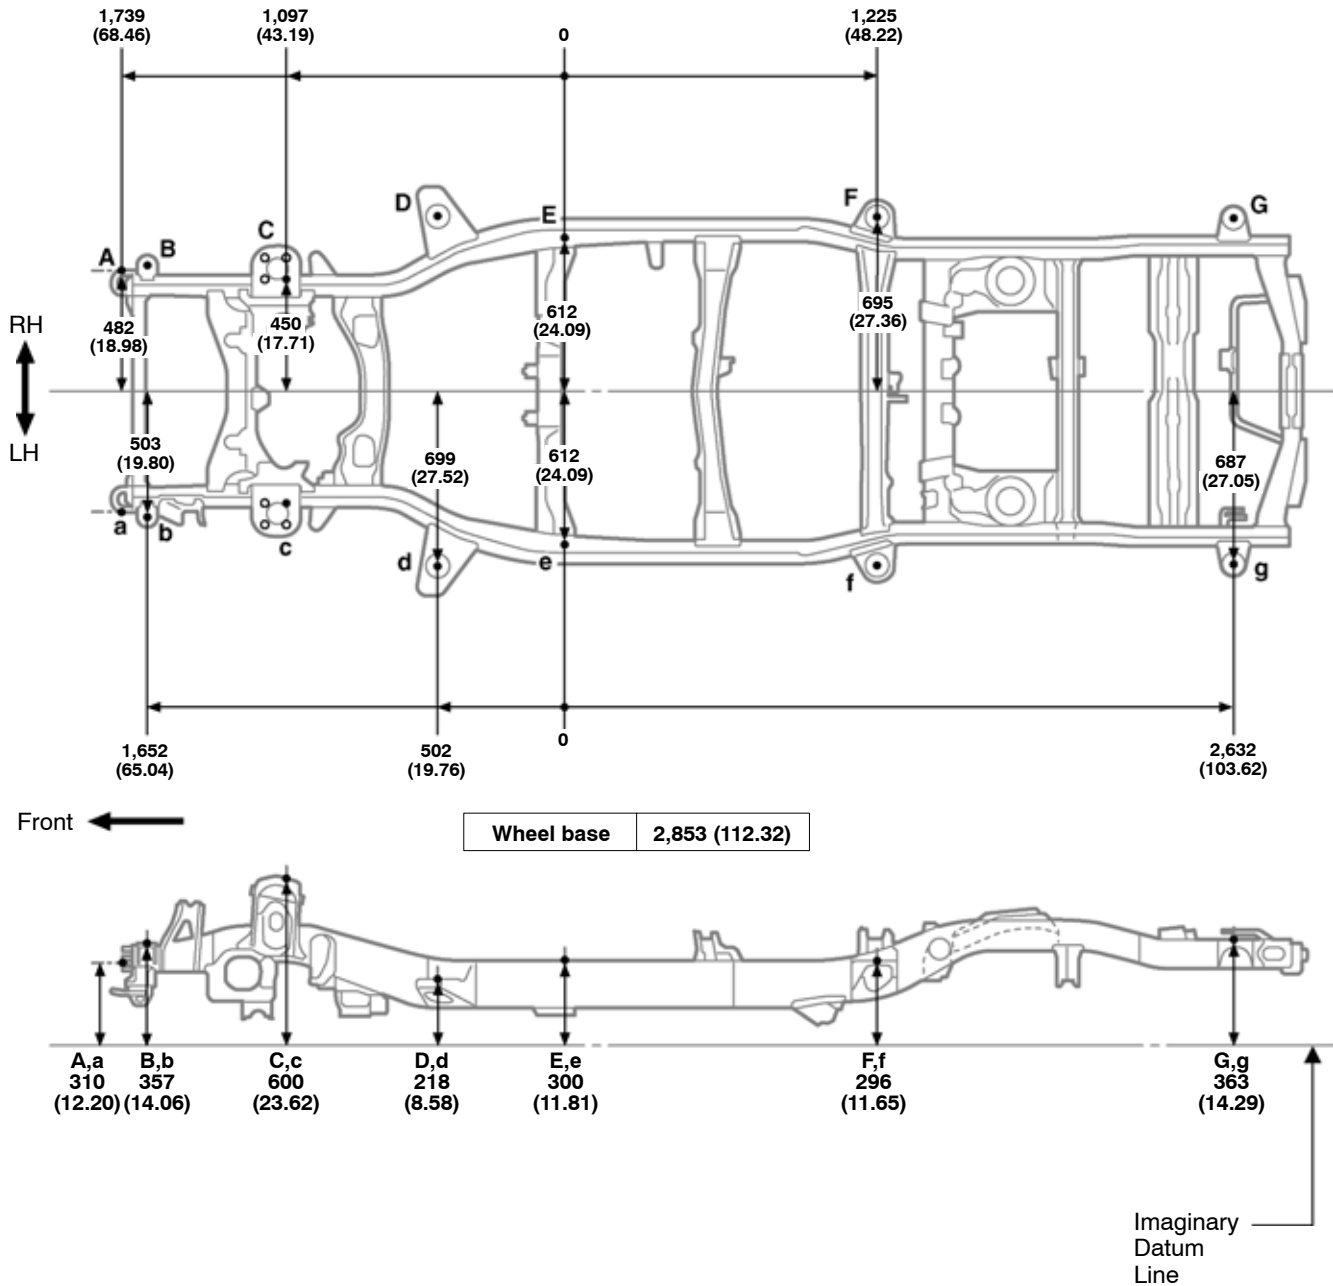


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)


Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face With Winch

(Three - Dimensional Distance)

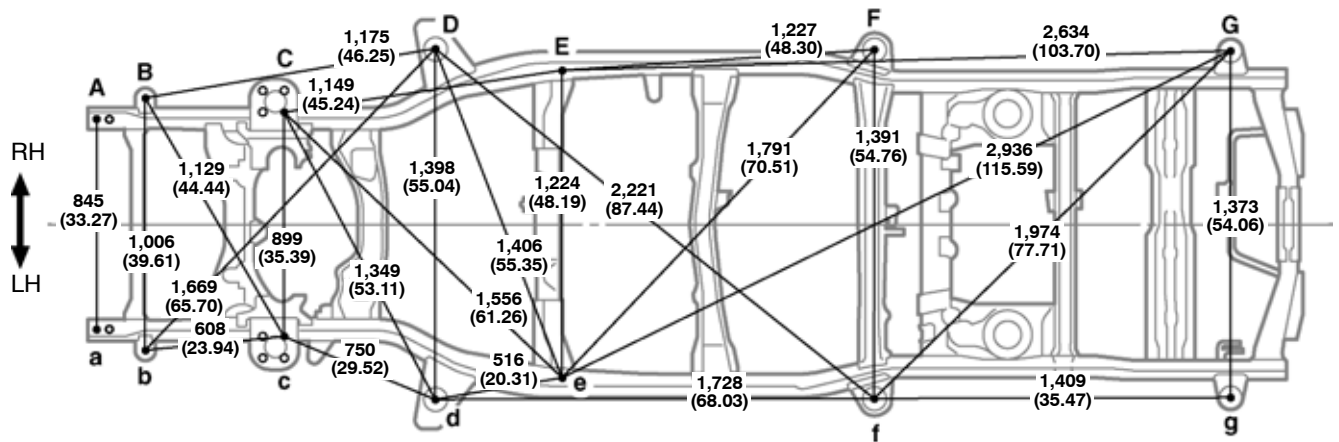

Front ←

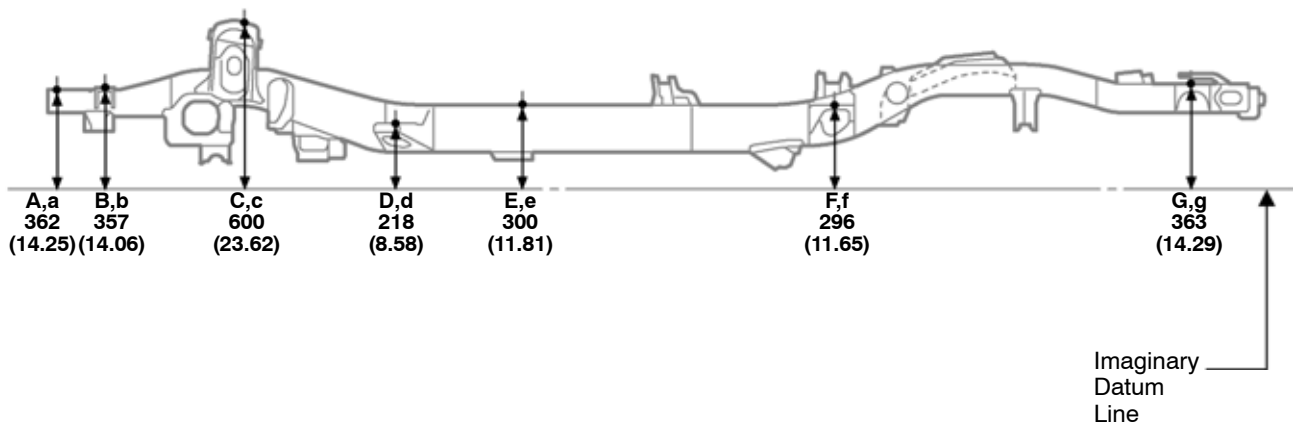


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Winch bracket installation nut	M12 (0.47)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Upper Face With Winch

(Two - Dimensional Distance)

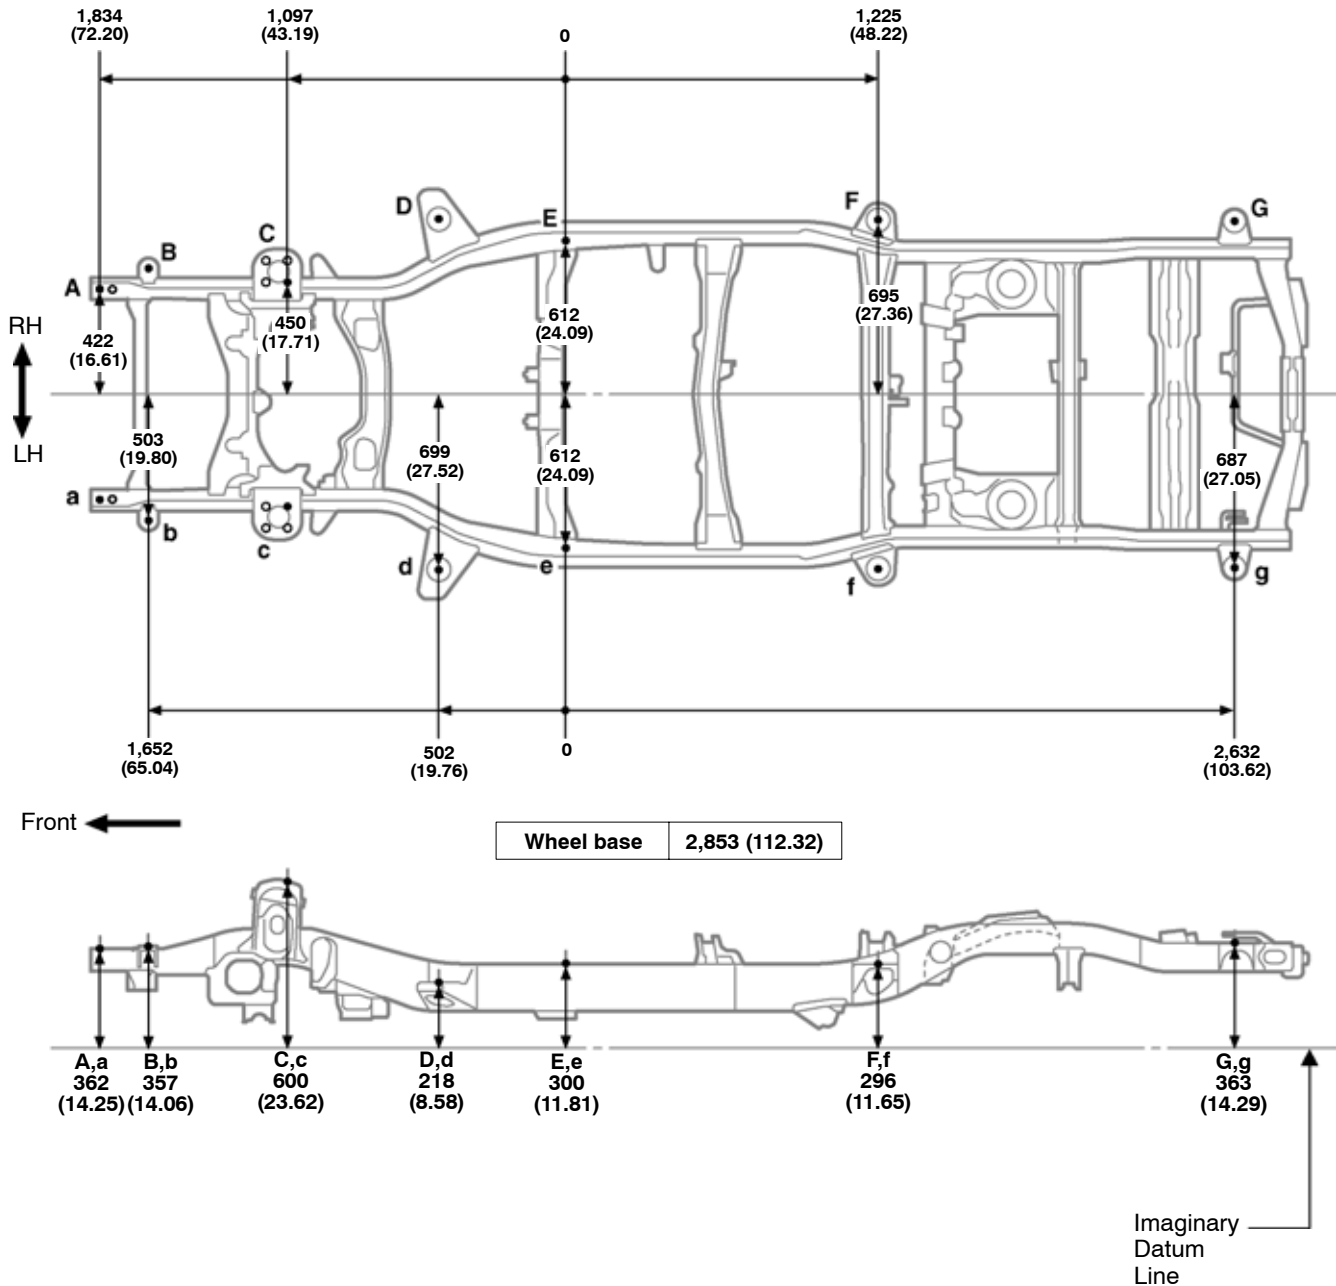


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	D, d	No. 2 body mounting hole	ø43 (1.69)
A, a	Winch bracket installation nut	M12 (0.47)	E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
B, b	No. 1 body mounting hole	ø26 (1.02)	F, f	No. 3 body mounting hole	ø43 (1.69)
C, c	Front spring support hole	ø12.2 (0.480)	G, g	No. 4 body mounting hole	ø43 (1.69)

FRAME DIMENSION - Lower Face


(Three - Dimensional Distance)

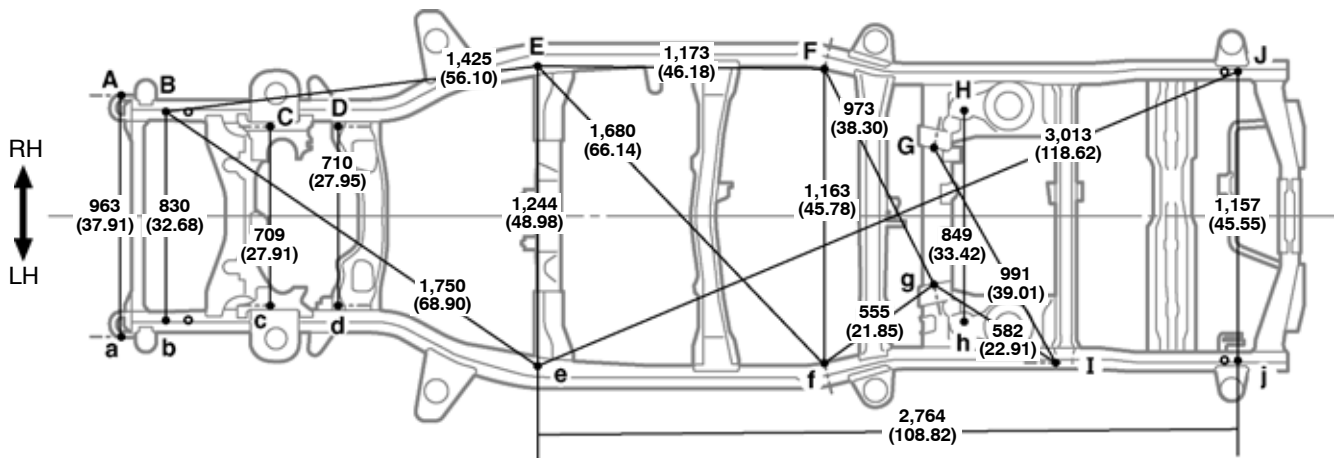

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front ←

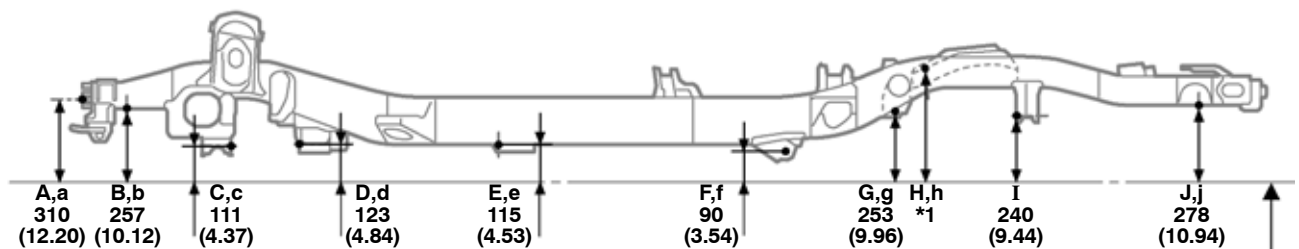

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)

Imaginary
Datum
Line


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I	Lateral control rod installation hole - front	ø15 (0.59)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J, j	Transport hook installation nut	M12 (0.47)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	—	—	—

FRAME DIMENSION - Lower Face

(Two - Dimensional Distance)

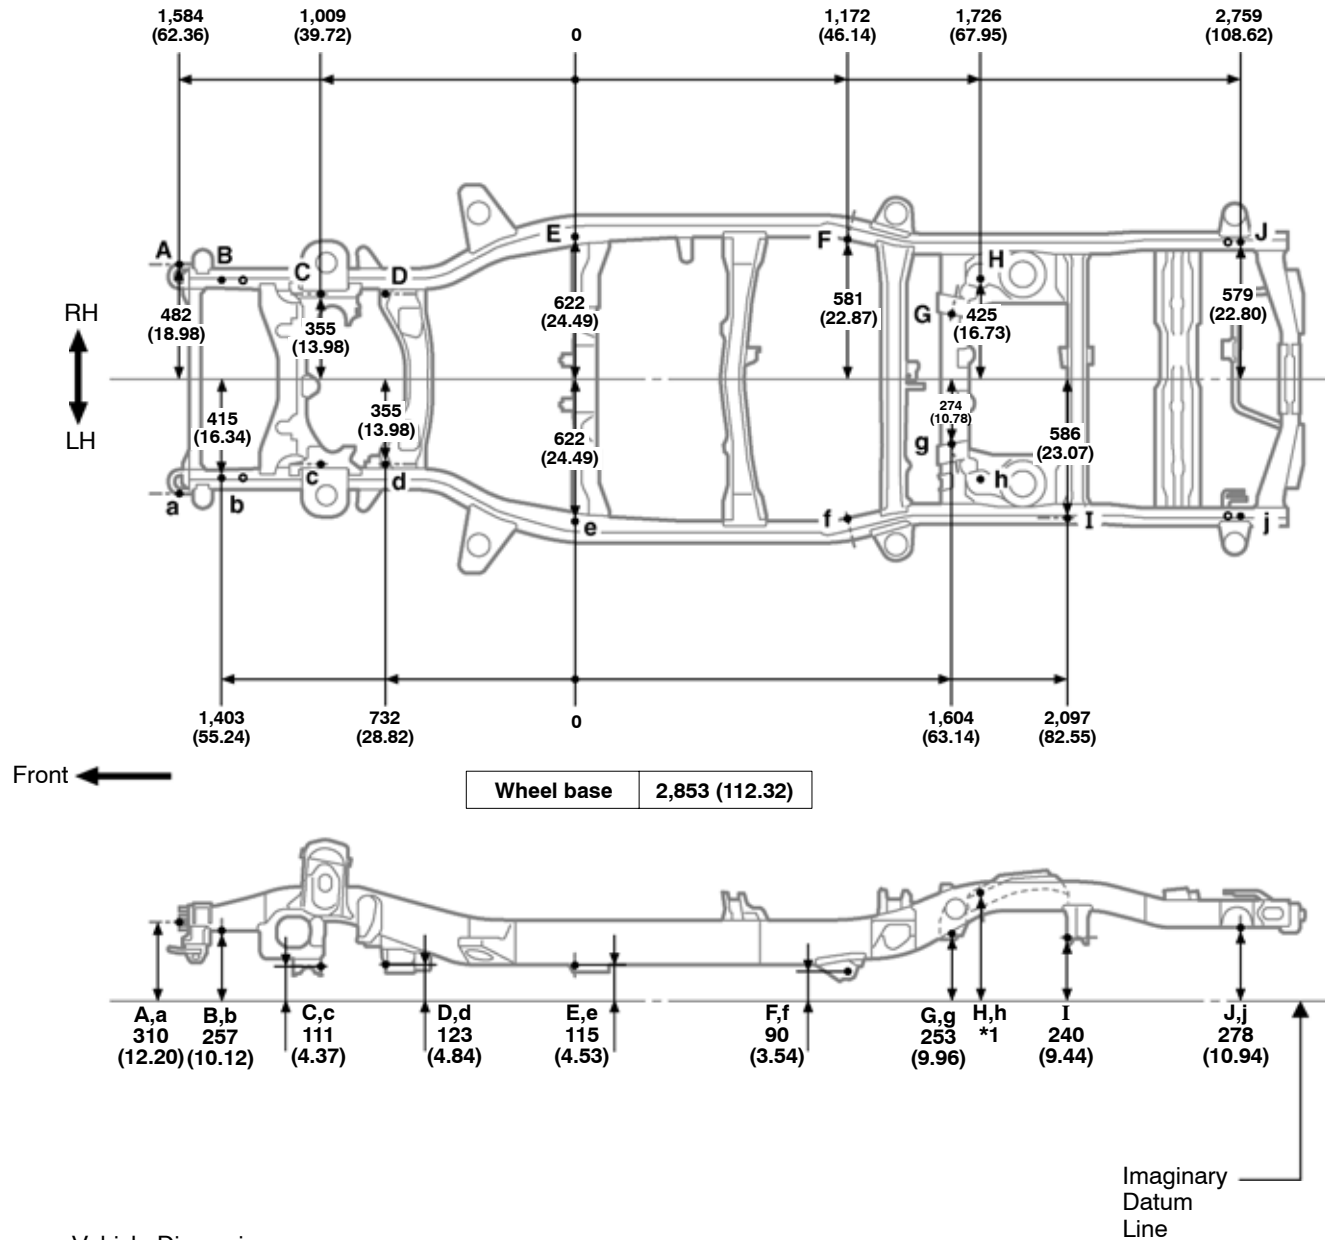

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).


mm (in.)

Symbol	Name	Hole dia.	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I	Lateral control rod installation hole - front	ø15 (0.59)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J, j	Transport hook installation nut	M12 (0.47)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	—	—	—

FRAME DIMENSION - Lower Face

With Kinetic Dynamic Suspension system


(Three - Dimensional Distance)

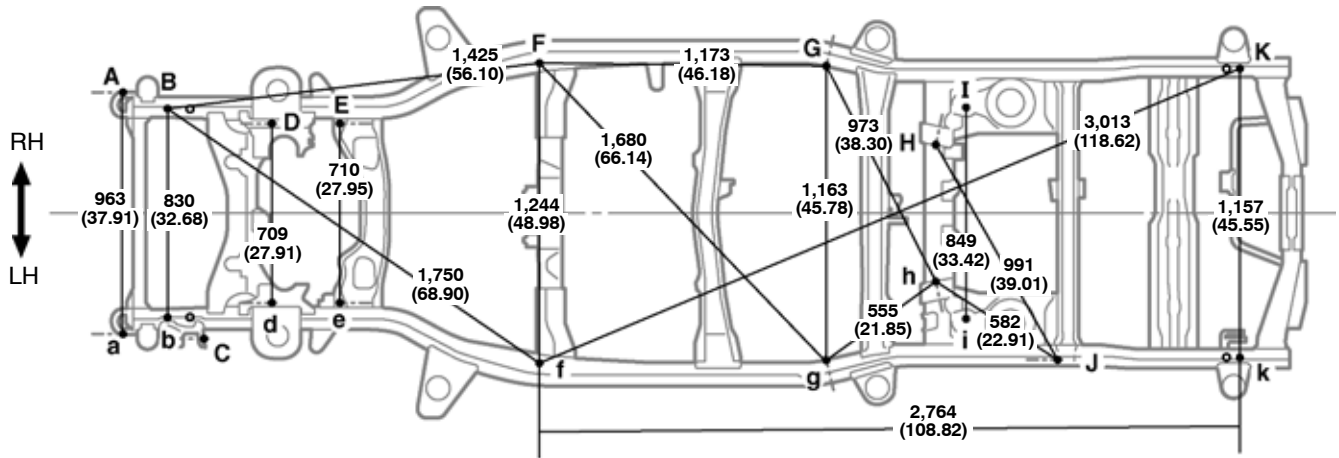

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front ←

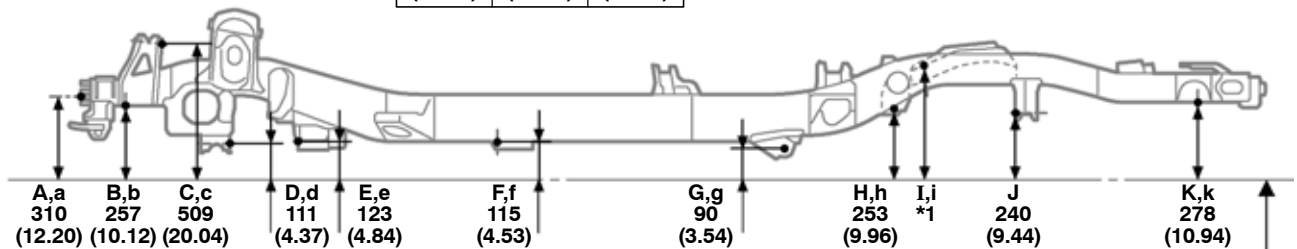

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).



mm (in.)

Symbol	Name	Hole dia.	F, f	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	G, g	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Kinetic Dynamic Suspension System bracket installation hole	ø18.5 (0.728)	I, i	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	J	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	K, k	Transport hook installation nut	M12 (0.47)

FRAME DIMENSION - Lower Face

With Kinetic Dynamic Suspension system

(Two - Dimensional Distance)

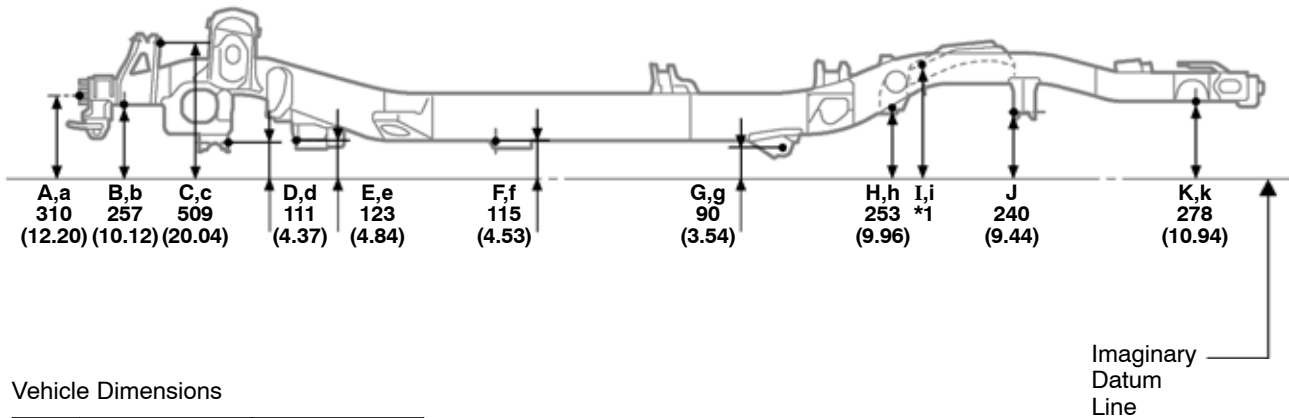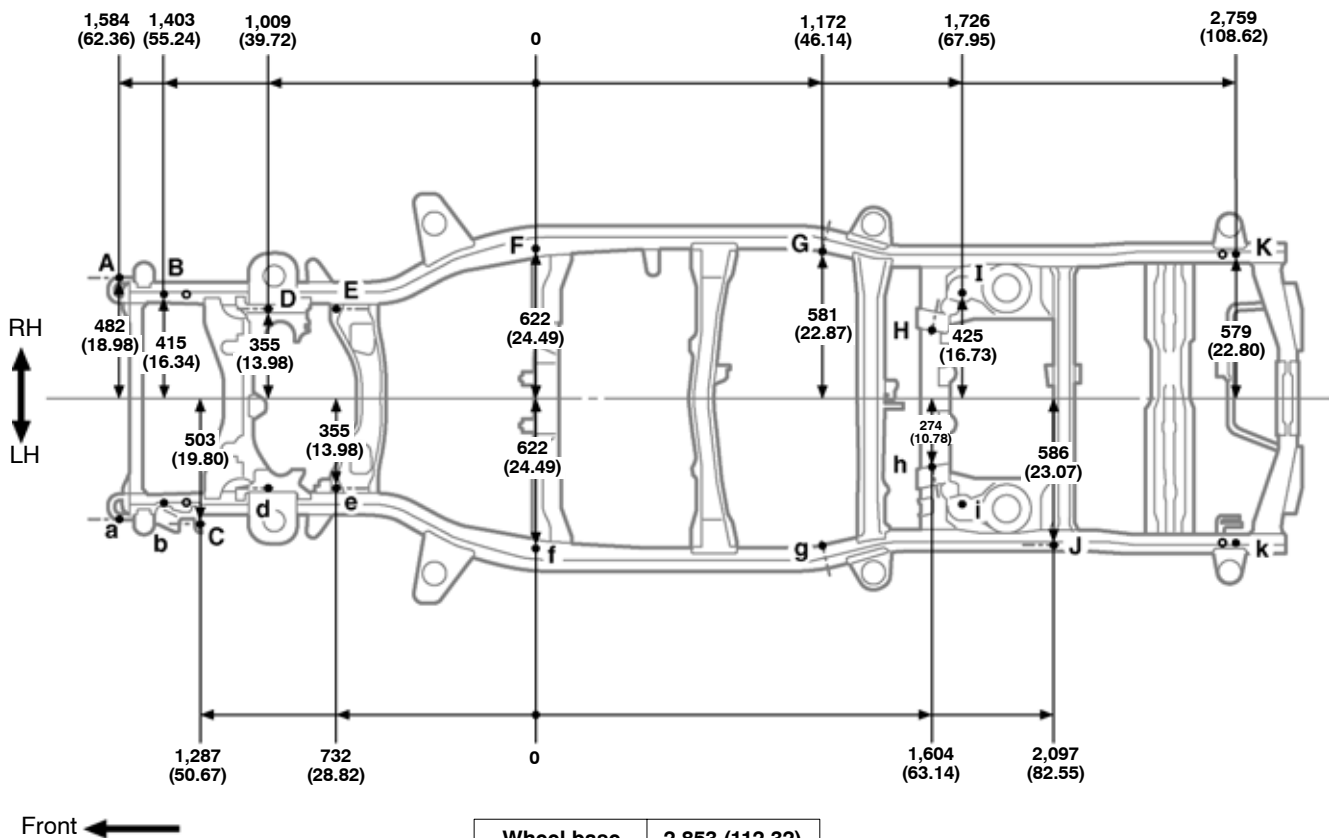

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	F, f	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)
A, a	Front bumper extension No. 2 installation bolt	M10 (0.39)	G, g	Lower control arm installation hole - inner	ø16.5 (0.650)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Upper control arm installation hole - inner	ø14.5 (0.571)
C, c	Kinetic Dynamic Suspension System bracket installation hole	ø18.5 (0.728)	I, i	Rear shock absorber installation hole	ø29.5 (1.161)
D, d	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	J	Lateral control rod installation hole - front	ø15 (0.59)
E, e	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	K, k	Transport hook installation nut	M12 (0.47)

FRAME DIMENSION - Lower Face With Winch


(Three - Dimensional Distance)

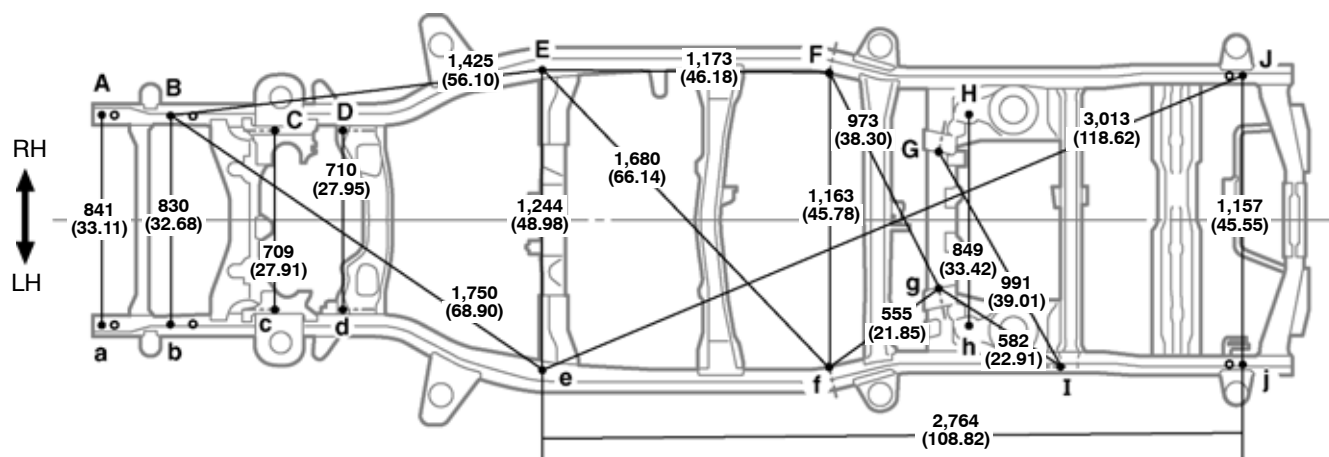

Vehicle Dimensions

C-d or c-D	C-D or c-d	G-g
762 (30.00)	278 (10.94)	549 (21.61)

Front ←

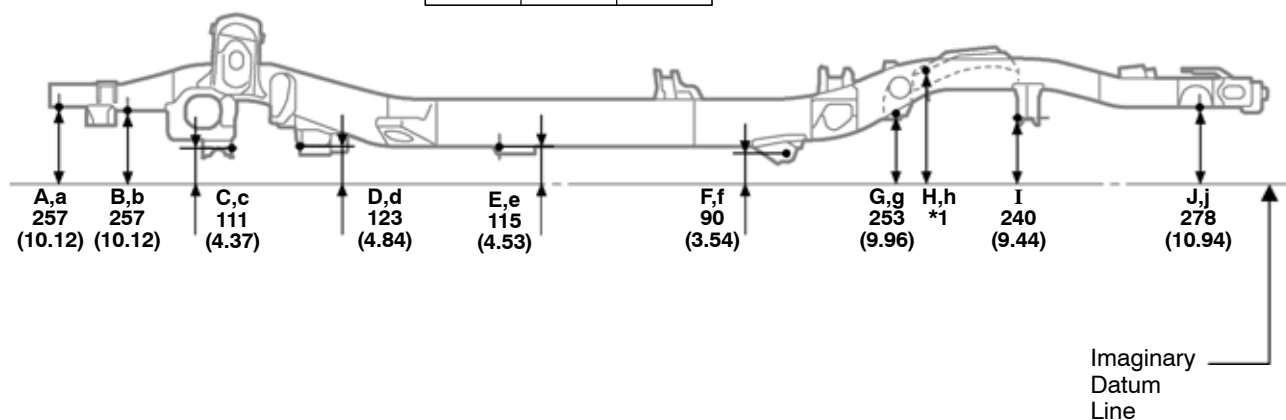

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
A, a	Winch bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I	Lateral control rod installation hole - front	ø15 (0.59)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J, j	Transport hook installation nut	M12 (0.47)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	—	—	—


FRAME DIMENSION - Lower Face With Winch

(Two - Dimensional Distance)

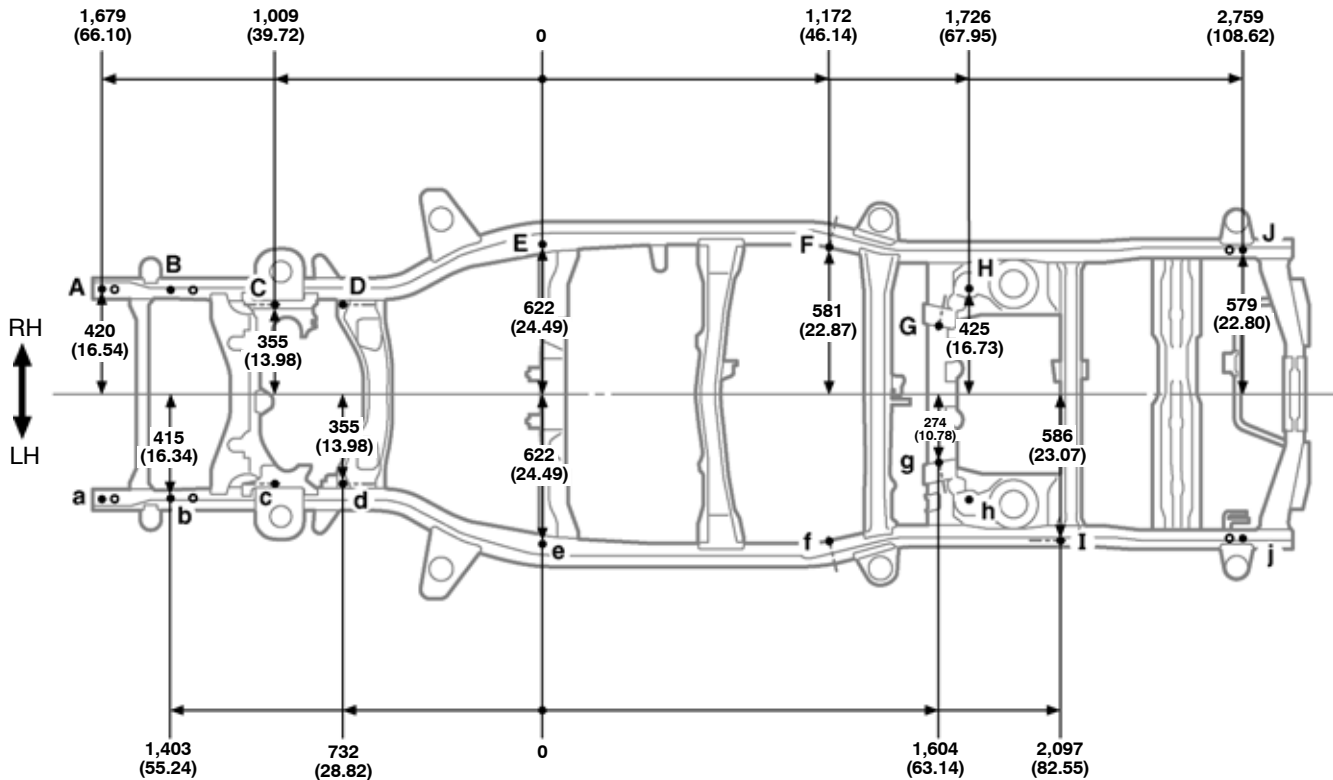

Front ←

Wheel base 2,853 (112.32)

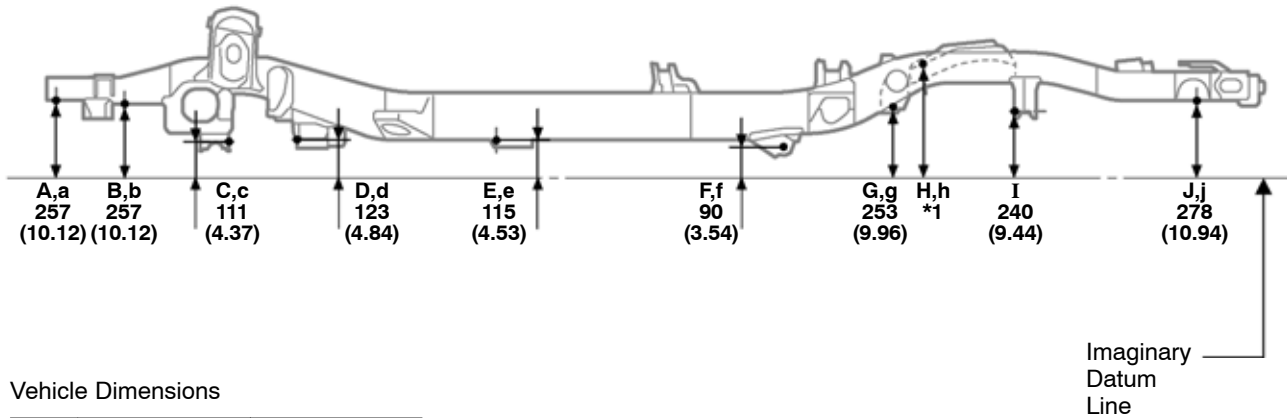

Vehicle Dimensions

	Heavy Duty	Light Duty
*1	416 (16.38)	418 (16.46)

Imaginary
Datum
Line

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (seen from rear).

mm (in.)

Symbol	Name	Hole dia.	F, f	Lower control arm installation hole - inner	ø16.5 (0.650)
A, a	Winch bracket installation nut	M12 (0.47)	G, g	Upper control arm installation hole - inner	ø14.5 (0.571)
B, b	Front stabilizer bracket installation nut	M12 (0.47)	H, h	Rear shock absorber installation hole	ø29.5 (1.161)
C, c	Suspension lower arm installation hole - rear	42 x 24 (1.65 x 0.94)	I	Lateral control rod installation hole - front	ø15 (0.59)
D, d	Suspension lower arm installation hole - front	36.5 x 18.5 (1.437 x 0.728)	J, j	Transport hook installation nut	M12 (0.47)
E, e	Side rail inner channel standard hole	16 x 16 (0.63 x 0.63)	—	—	—